

Main Functions

- Luminescence technology, no glare, no strobe, soft lighting eye protection
- LED with ultra-long life and minimal light decay
- Control switch, brightness color temperature adjustments, easy to operate
- Three - color temperature dimming
- Three dimensional omni-directional lighting angles
- Foldable structure
- LCD clock w/ alarm, date and temperature display
- LCD backlight can be turned on/off
- High power 10 watt Qi wireless charge base

Energy saving

Zero UV

Eye-care

High Color fidelity


Dimmable

Specifications

Power Input:	12V
USB Power Output:	5V \approx 2.1A
Wireless Charging Power:	10W
LED MAX	6W
Brightness:	500 lm
Color Temperature:	3000K-6000K
CRI	> 80Ra

Accessories

Plug in the device




The instructions Adapter and power cord

Instructions For Use




- Light can be turned on or off by touching the ON/OFF button.
- Touch the \wedge / \vee button lightly to adjust the brightness of the light up and down.
- Touch the M button lightly to adjust the color temperature of the light. There are three color temperature modes to choose from.




Scope of lamp holder movement:

- While adjusting the Angle of the lamp head, hold down the base at the same time.
- Lamp holder rotation range is 180° (this product has a finite position device, lamp head rotation range is 180°).



Normal range of lamp arm movement:

- The use range of the lamp arm's front swing is: 90°.
- While adjusting the Angle of the lamp arm, hold down the base at the same time.



USB power output

The power input

- Insert the power adapter input wire into the interface (DC12V) behind the base.
- After connecting the OUTPUT of USB power supply, it can charge other devices (USB power output 5V \approx 2.1A).



- Plus mobile phone holder (This function cannot be used when using wireless charging)

Instructions For Light

- Power button: press button to turn the light on or off
- Brightness adjustment: touch button \wedge or \vee lightly
- Color temperature adjustment: in the light mode, press M to convert
1. Cold light 2. Warm light 3. Natural light
- LCD backlight: long press 2 seconds to turn on/off the LCD backlight.


Clock And Calendar Setup

M	S	\wedge	\vee
Mode	Set	Up	Down


- Date and time Settings
 1. In clock mode (TIME is shown in the upper left corner) press S key to enter the settings function, and then press S key again to enter the setting of the next option, the setting order is: Hour-Minute-Year-Month-Day-Exit
 2. Press \vee key and \wedge key to set up
 3. In the setting mode, press M key to exit and save, or it will automatically exit and save if no operation within one minute.
 4. In clock mode, press \wedge key to convert 12-hour system Weeks will be automatically adjusted as the date changes If the week does not match the date at that time, you need to check whether the year settings are correct.
 - Alarm and Snooze Function Settings
 1. In clock mode (TIME in the upper left corner), press M to enter alarm mode (ALARM in the upper left corner)
 2. In alarm mode, press S key to enter the settings, and then press again to enter the settings of the next option. The setting order is: Hour-Minute-Snooze-Music-Exit
 3. Press \vee key and \wedge key to set up
 4. In the alarm mode, press \vee key or \wedge key to turn on and off alarm bells and snooze functions, and setting order is: Alarm on - Snooze off - Alarm & Snooze off
 5. The alarm will ring for one minute. When the snooze time interval arrives, the alarm will ring twice, and the alarm will ring for one minute at a time Press S key to cancel the sound, press any key to pause
 6. Snooze interval duration range is set to 1-60 minutes (the default is 60 minutes), 8 ring tones are optional, press \wedge / \vee to set
- In clock mode, press the V key to switch Celsius and Fahrenheit
When the alarm rings, the light will automatically turn on.
Pressing ON/OFF key to pause the alarm. (When the LCD backlight is off, the backlight will be light at the same time.)

Wireless Charging


charging or USB output charging can be selected. If wireless charging is selected, please put the mobile phone supporting wireless charging in the wireless charging area.

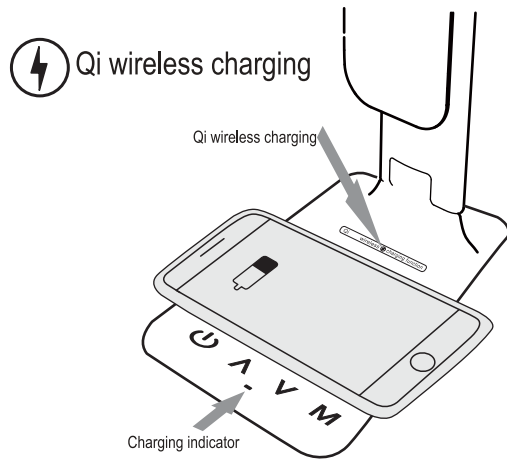

Battery Replacement

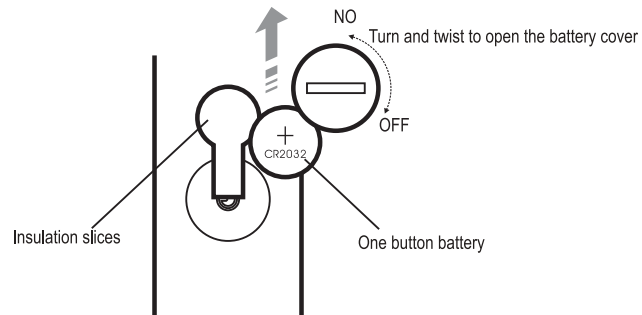

PROTEKRC
A HIGHER LEVEL OF PERFORMANCE

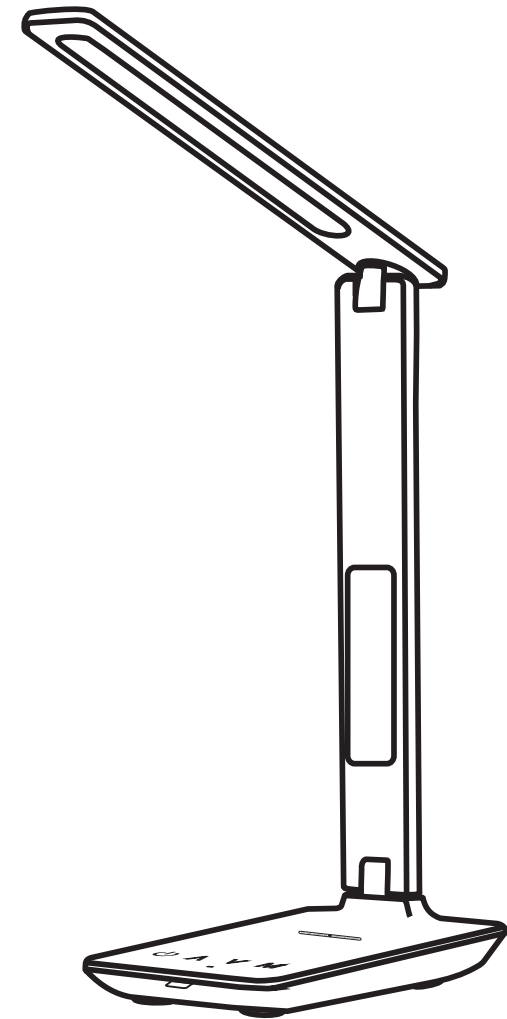

MULTIFUNCTION PIT LIGHT