

MANUAL

IL GOBLIN
51

IL GOBLIN

THE ITALIAN HELI


RAW

EAB HELI DIVISION



 Please read this user manual carefully, it contains instructions for the correct assembly of the model.
Please refer to the web site www.goblin-helicopter.com for updates and other important information.

VERY IMPORTANT

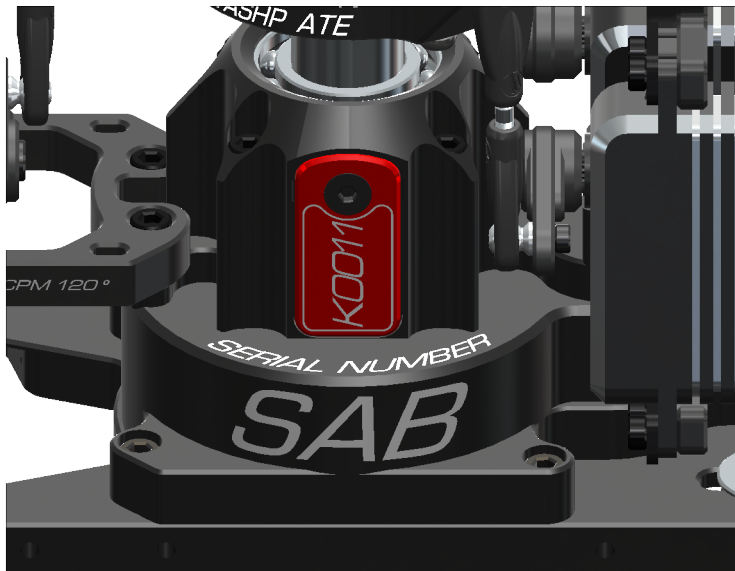

You will find your serial number on the RED plate of the transmission module and on the product card included with your kit.
Please take a moment to register your kit online via our web site at:

<http://www.goblin-helicopter.com>

It is extremely important that you take a moment to register your helicopter with us. This is the only way to ensure that you are properly informed about changes to your kit, such as upgrades, retrofits and other important developments. SAB Heli Division cannot be held responsible for any issues with your model and will not provide support unless you register your model.

The Serial number is also engraved in the Aluminum part.

Thank you for your purchase, we hope you enjoy your new Goblin helicopter!

SAB Heli Division


INDEX

1 – INTRODUCTION
2 – IMPORTANT NOTES
3 – NOTE FOR ASSEMBLY
4 – TRANSMISSION GROUP ASSEMBLY
5 – SWASHPLATE SERVOS ASSEMBLY
6 – FRAME GROUP ASSEMBLY
7 – HEAD ASSEMBLY

8 – ASSEMBLING OF THE MODULES
9 – LOWER SIDE FRAME INSTALLATION
10 – LANDING GEAR INSTALLATION
11 – INSTALLATION OF THE MOTOR/ESC
12 – TAIL GROUP ASSEMBLY
13 – TAIL BOOM ASSEMBLY
14 – INSTALLATION FBL/RX

15 – INSTALLATION CANOPY
16 – INSTALLATION BATTERY
17 – IN FLIGHT
18 – MAINTENANCE
19 – TRANSMISSION MODULE
20 – CHECK LIST
21 – SPARE PARTS

ILGOBLIN RAW [SG763] TECHNICAL SPECIFICATIONS

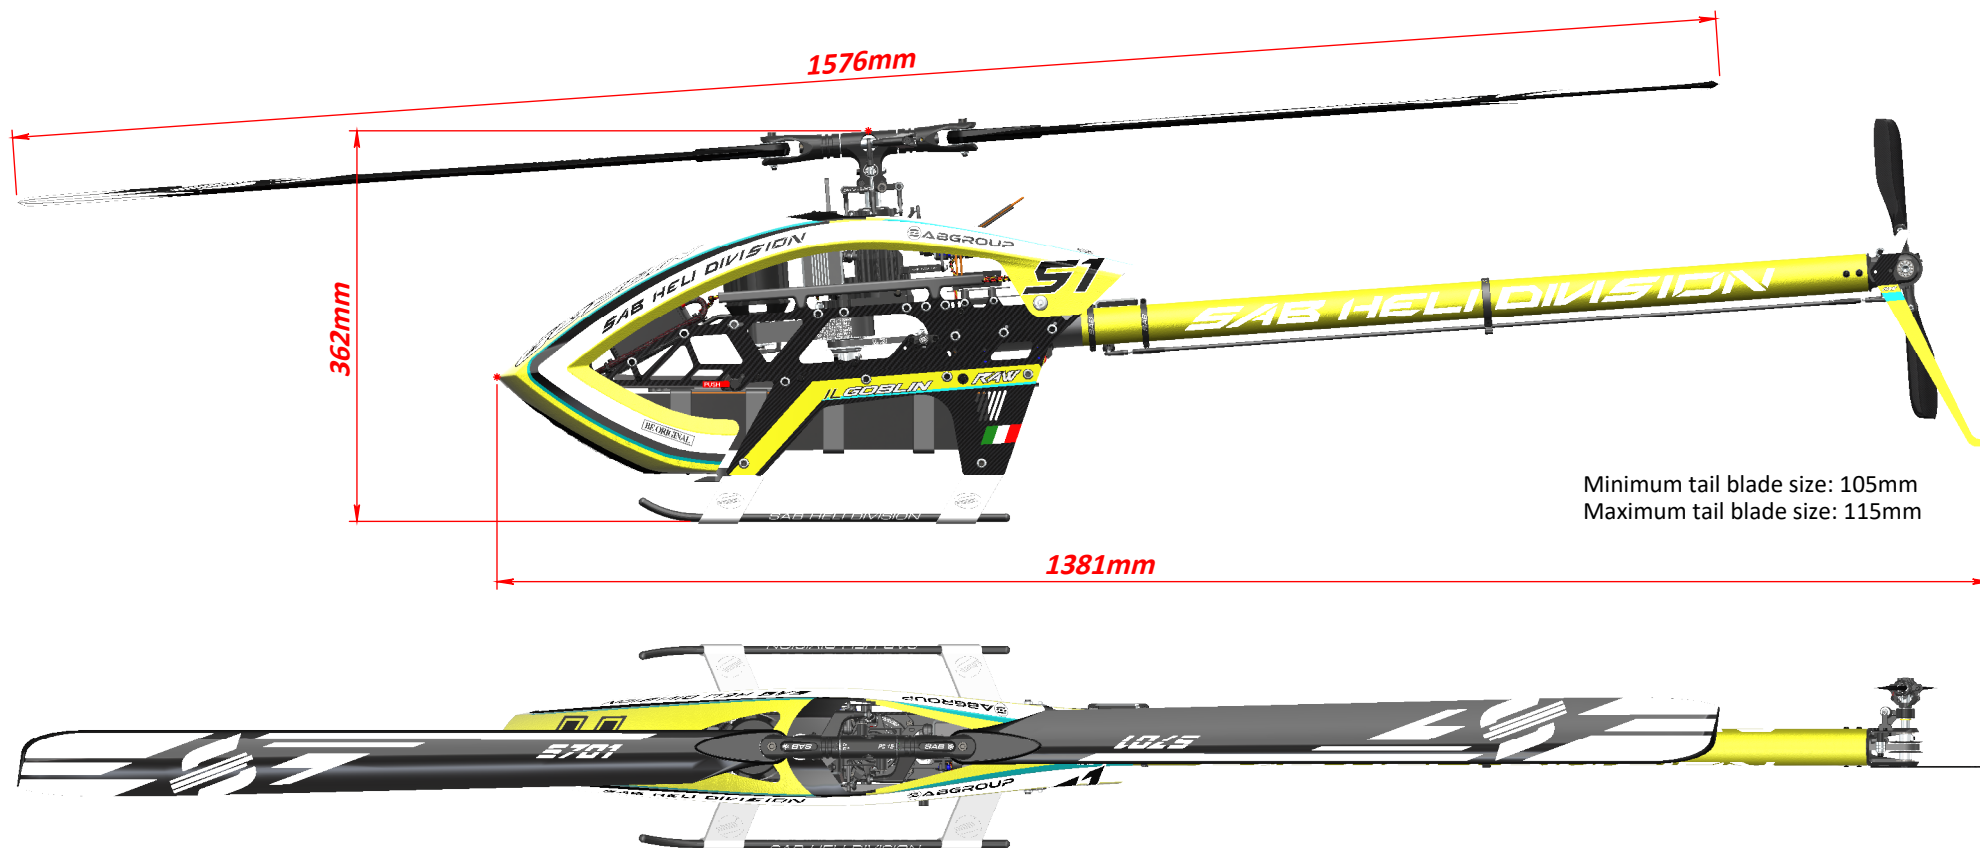

Minimum tail blade size: 105mm
Maximum tail blade size: 115mm

- **AIRFRAME weight:** 2122 gr (no blades, no battery, no electronics).
- **Main rotor diameter:** 1576 mm (with 700 mm blade).
- **Main blade length:** 650 to 730 mm.
- **Tail rotor diameter:** 292 mm (with 110 mm tail blade).
- **Tail blade length:** 105 to 115 mm.
- **Main shaft 15 mm, Tail shaft 8 mm.**
- **Aluminum tail boom.**

KIT Includes:

- 21T motor pulley (other pulley sizes available).
- 1 battery tray with straps.

- **Cyclic Servos:** Standard size 40 mm.
- **Tail Servo:** Standard size 40 mm.
- **Main Rotor Ratio:** 11.8 to 8.8 (21T included: 10.1:1).
- **Tail Rotor Ratio:** 5.1-4.9:1 (26T included: 4.9:1).
- **Motor:** 12S, 480/560 KV.
- **Battery room:** 50x60x300 mm.

- S701 (700 mm main blade).
- S105 (110 mm tail blade).



IMPORTANT NOTES

- *This radio-controlled helicopter is not a toy.
- *This radio-controlled helicopter can be very dangerous.
- *This radio-controlled helicopter is a technically complex device which has to be built and handled very carefully.
- *This radio-controlled helicopter must be built following these instructions. This manual provides the necessary information to correctly assemble the model.
- *Inexperienced pilots must be monitored by expert pilots.
- *All operators must wear safety glasses and take appropriate safety precautions.
- *A radio-controlled helicopter must only be used in open spaces without obstacles, and far enough from people to minimize the possibility of accidents or of injury to property or persons.
- *A radio-controlled helicopter can behave in an unexpected manner, causing loss of control of the model, making it very dangerous.
- *Lack of care with assembly or maintenance can result in an unreliable and dangerous model.

***Neither SAB Heli Division nor its agents have any control over the assembly, maintenance and use of this product. Therefore, no responsibility can be traced back to the manufacturer. You hereby agree to release SAB Heli Division from any responsibility or liability arising from the use of this product.**

SAFETY GUIDELINES

- *Fly only in areas designated for the use of model helicopters.
- *Follow all control procedures for the radio frequency system.
- *It is necessary that you know your radio system well. Check all functions of the transmitter before every flight.
- *The blades of the model rotate at a very high speed; be aware of the danger they pose and the damage they may cause.
- *Never fly in the vicinity of other people.

DAMAGE LIMITS

SAB HELI DIVISION SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCT, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY. Further, in no event shall the liability of SAB Heli Division exceed the individual price of the product on which liability is asserted. As SAB Heli Division has no control over use, setup, final assembly, modification or misuse, no liability shall be assumed nor accepted for any resulting damage or injury. By the act of use, setup or assembly the user accepts all resulting liability. If you as the Purchaser or user are not prepared to accept the liability associated with the use of this Product, you are advised to return this Product immediately in new and unused condition to the place of purchase.

LIMITED WARRANTY

SAB Heli Division reserves the right to change or modify this warranty without notice and disclaims all other warranties, express or implied.

(a) This warranty is limited to the original Purchaser ("Purchaser") and is not transferable. REPLACEMENT AS PROVIDED UNDER THIS WARRANTY IS THE EXCLUSIVE REMEDY OF THE PURCHASER. This warranty covers only those Products purchased from an authorized SAB Heli Division dealer. Third party transactions are not covered by this warranty. Proof of purchase is required for warranty claims.

(b) Limitations- SAB HELI DIVISION MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NONINFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCT. THE PURCHASER ACKNOWLEDGES THAT THEY ALONE HAVE DETERMINED THAT THE PRODUCT WILL SUITABLY MEET THE REQUIREMENTS OF THE PURCHASER'S INTENDED USE.

(c) Purchaser Remedy - SAB Heli Division's sole obligation hereunder shall be that SAB Heli Division will, at its option, replace any product determined by SAB Heli Division to be defective. In the event of a defect, this is the Purchaser's exclusive remedy. Replacement decisions are at the sole discretion of SAB Heli Division. This warranty does not cover cosmetic damage or damage due to acts of God, accident, misuse, abuse, negligence, commercial use, or modification of or to any part of the Product. This warranty does not cover damage due to improper installation, operation, maintenance or attempted repair by anyone.


ADDITIONAL COMPONENTS REQUIRED

- *Electric Motor
- *Speed controller
- *Batteries: 12S – 4200/5500mAh
- *1 flybarless 3 axis control unit
- *Radio power system.
- *3 cyclic servos
- *1 tail rotor servo
- *6 channel radio control system on 2.4 GHz

TOOLS, LUBRICANTS, ADHESIVES

- *Generic pliers.
- *Hexagonal driver, size 1.5, 2, 2.5, 3mm.
- *4/5mm T-Wrench.
- *5.5mm Socket wrench (for M3 nuts).
- *8mm Hex fork wrench (for M5 nuts).
- *Medium threadlocker (SAB p/n HA116-S).
- *Strong retaining compound (SAB p/n HA115-S).
- *Spray lubricant (eg. Try-Flow Oil).
- *Synthetic grease (eg. Microlube 261).
- *Cyanoacrylate adhesive.
- *Pitch Gauge (for set-up).
- *Soldering equipment (for motor wiring).

INSIDE THE MAIN BOX THERE ARE:

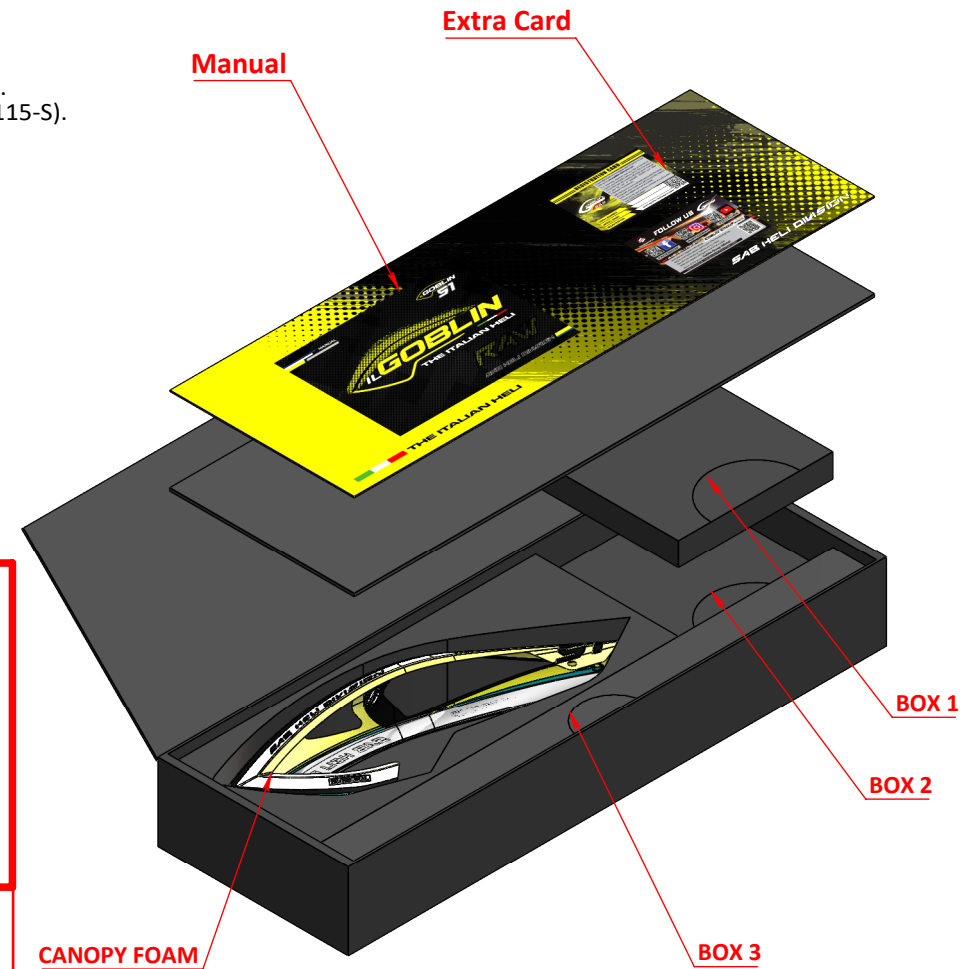

NOTES FOR ASSEMBLY

Please refer to this manual for assembly instructions for this model. Follow the order of assembly indicated. The instructions are divided into chapters, which are structured in a way that each step is based on the work done in the previous step. Changing the order of assembly may result in additional or unnecessary steps. Use thread lockers and retaining compounds as indicated. In general, each bolt or screw that engages with a metal part requires thread lock. It is necessary to pay attention to the symbols listed below:

<p>Important</p>	<p>Blue screw and blue bearing in the illustration means you need to use: Thread Locker Medium Strength (SAB HA116-S)</p>	<p>Green screw and Green bearing in the illustration means you need to use: Use retaining compound (SAB HA115-S)</p>
<p>Indicates that for this assembly phase you need materials that are: BOX xxx, BAG xxx.</p>	<p>Use CA Glue</p>	<p>Use Proper Lubricant</p>

The assembly process is described in the following chapters. Each chapter provides you with the box, bag and/or foam numbers you will need for that chapter. The information is printed in a black box in the upper corner of the page.



56763

Raw
GOBLIN


TRANSMISSION GROUP ASSEMBLY

BOXES 1-2 , BAG FOR PAGE 5

TRANSMISSION GROUP ASSEMBLED AND VERIFIED



The unit is ready to use. Check page 38 for more information.

Already Assembled
With Loctite

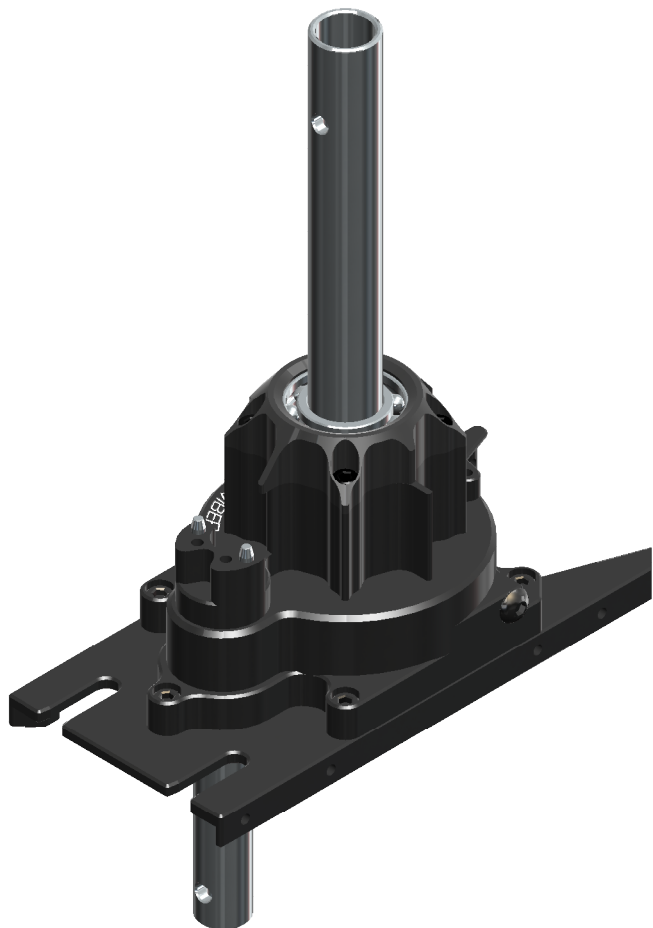

MAIN PULLEY ASSEMBLY

Already Assembled
With Loctite

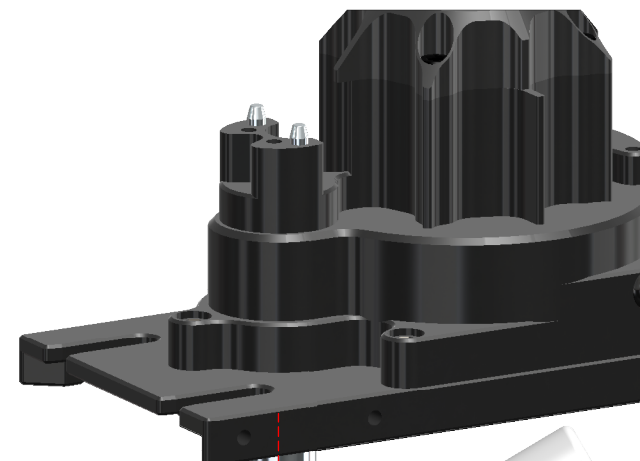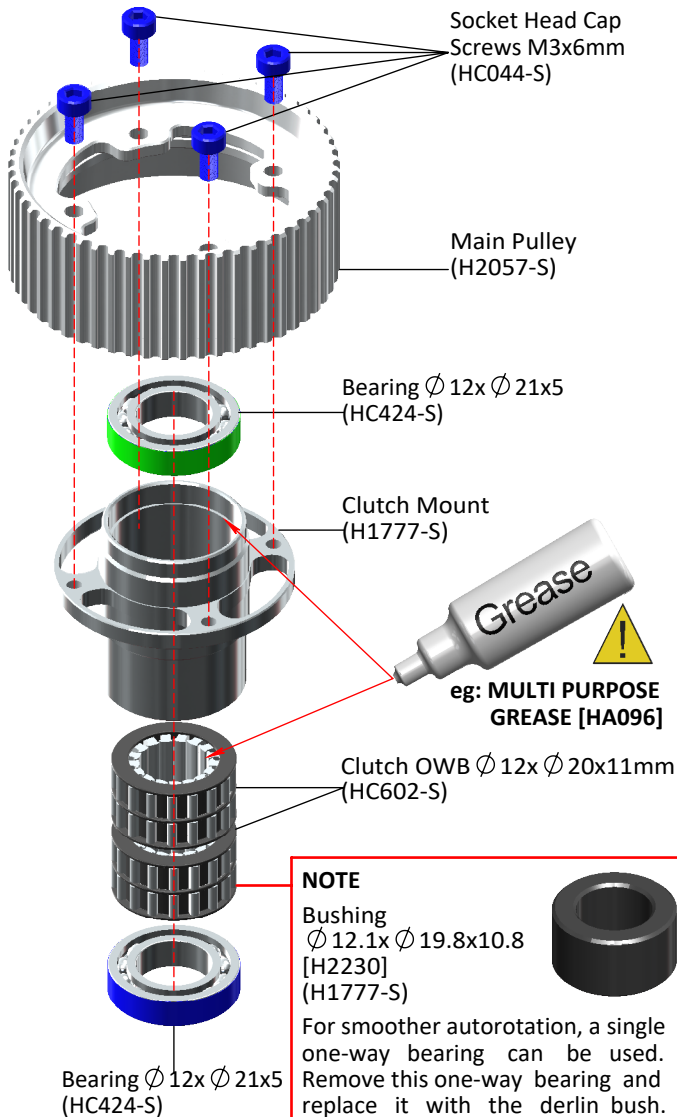

Bushing $\phi 12.1x \phi 15x1.4$ [H1275] (H1777-S)

Grease
eg: MULTI PURPOSE GREASE [HA096]

FREE TURN PULLEY


Front Tail Pulley Assembly (H1778-S)

Already Assembled
With Loctite

Socket Head Cap Screw Shoulder M4x21.5mm (HC545-S)

Shim $\phi 12.1x \phi 16x0.1mm$ [HC538] (H2057-S)
Use to remove play

Nylon Nut M4 (HC212-S)



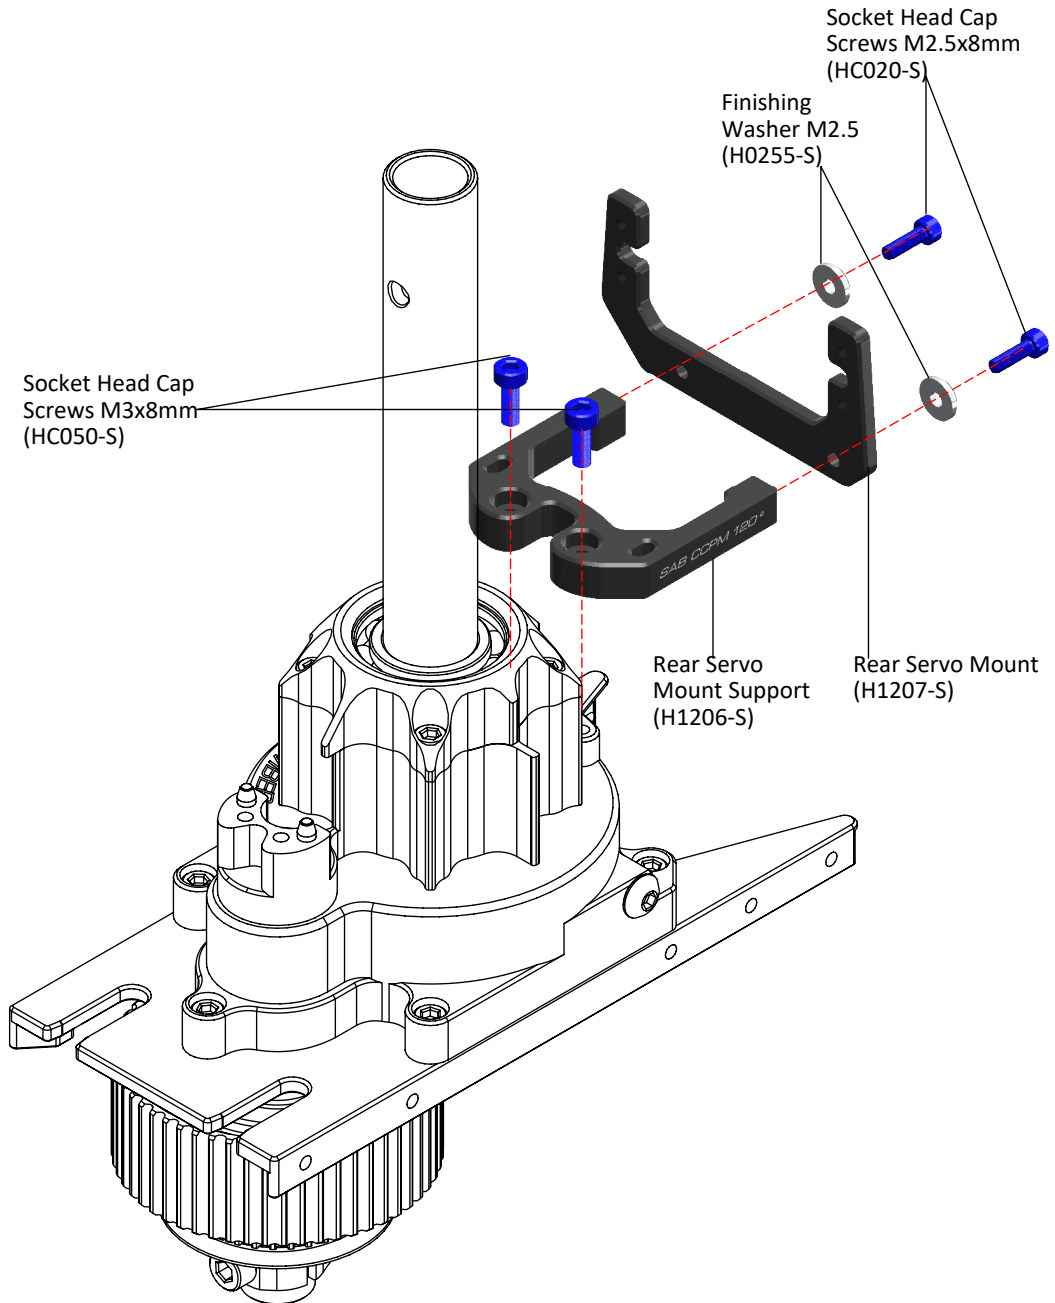


SERVO ASSEMBLY

The linkage ball must be positioned 18 mm out on the servo arm. The recommended servo arm to use is: SAB p/n [HA050/HA051].

Ensure the alignment of the servo arms (and sub trim is set) before installation of the servos in the model.

Proceed with installation following the instructions below. You can use the G10 servo tool to align the front servo arms with the theoretical horizontal line. **(Figure 3)**

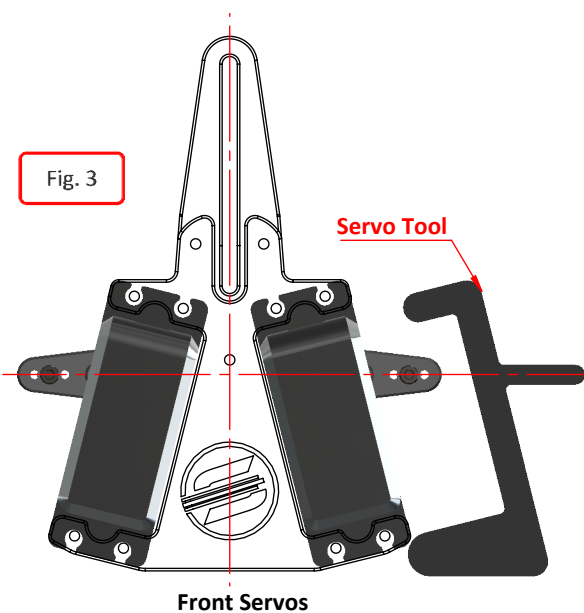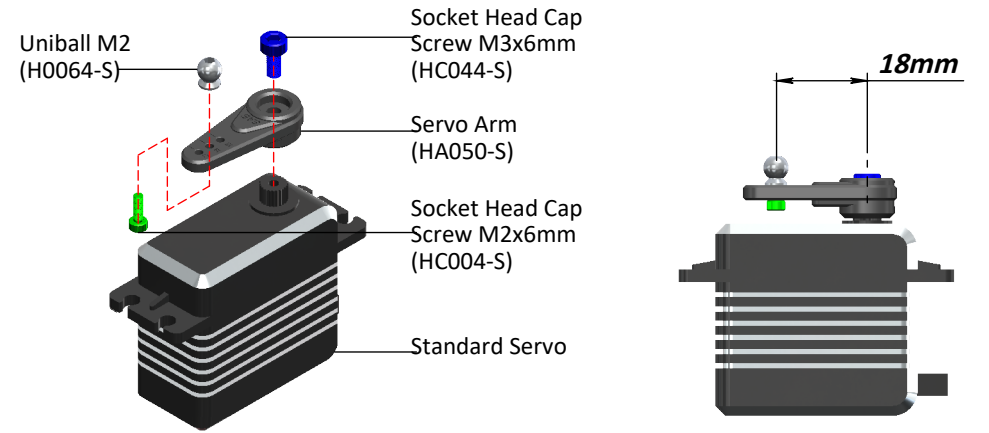




SB763

Raw
GOBLIN



SWASHPLATE SERVO ASSEMBLY

BOX 1, BAG FOR PAGE 7

FRONT SERVO MOUNT ASSEMBLY

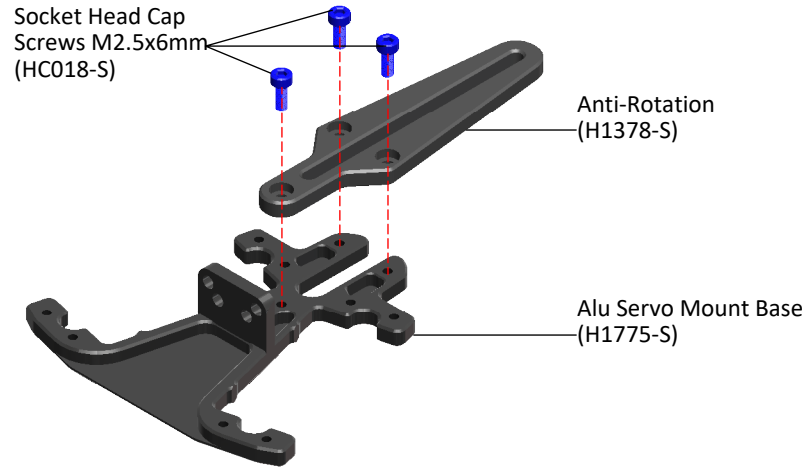


FRONT SERVO ASSEMBLY

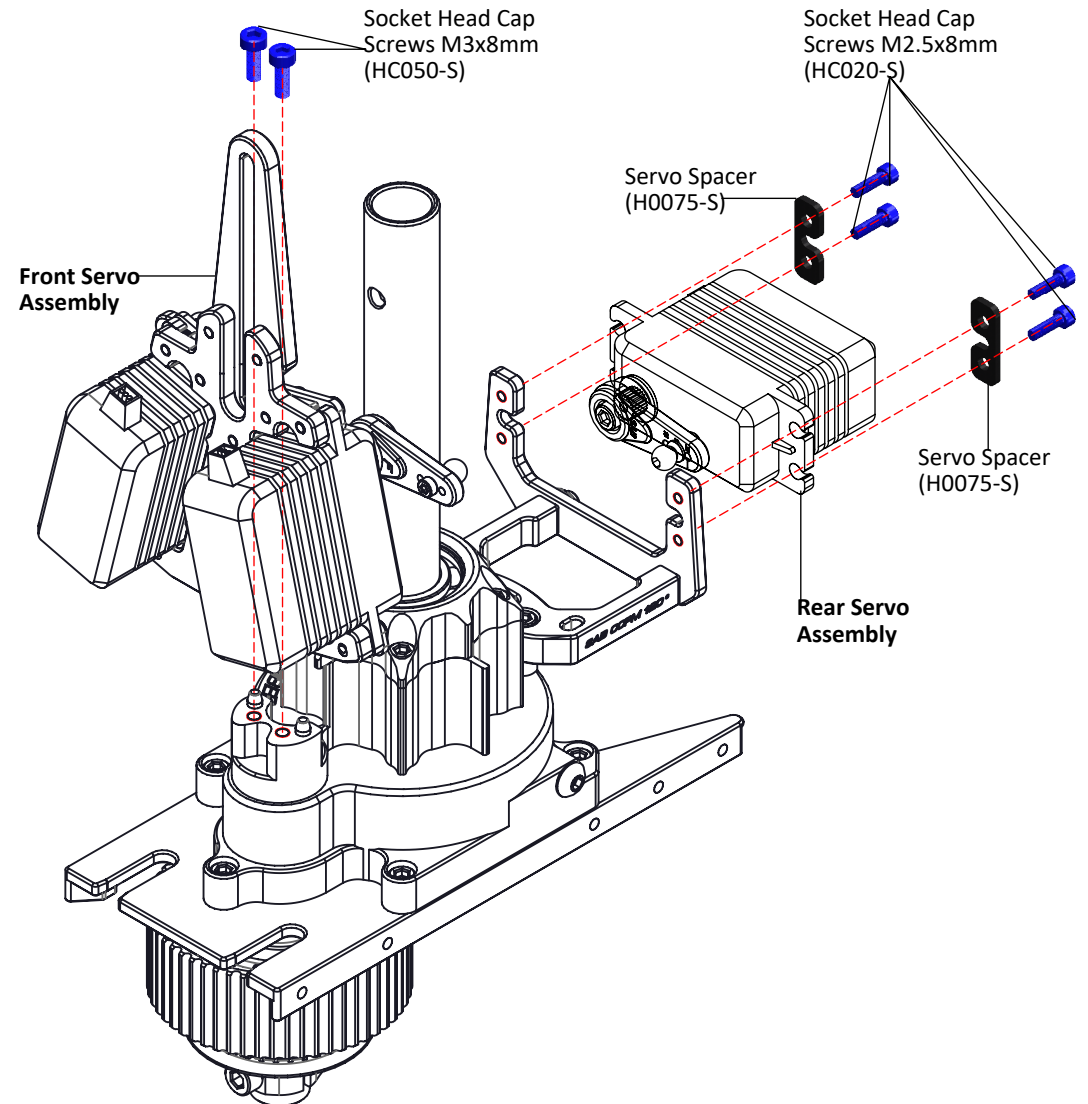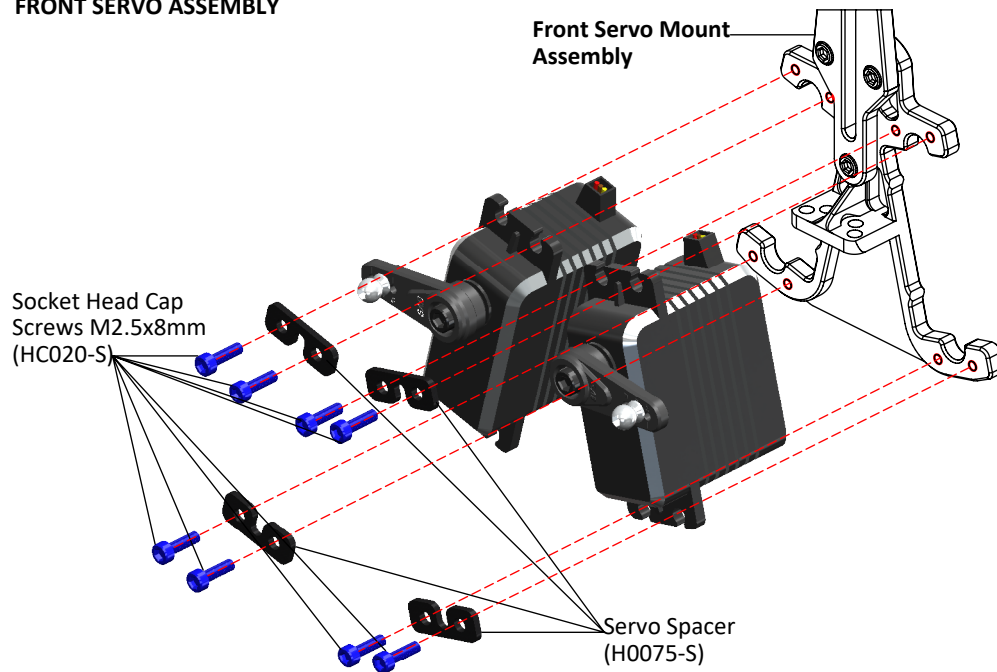


CARBON FRAME



The manufacturing process of the carbon parts often leaves micro-burrs and sharp edges. We recommend de-burring the edges to minimize the risks of electrical wire cuts, etc. It is very important to do this along the red lines.

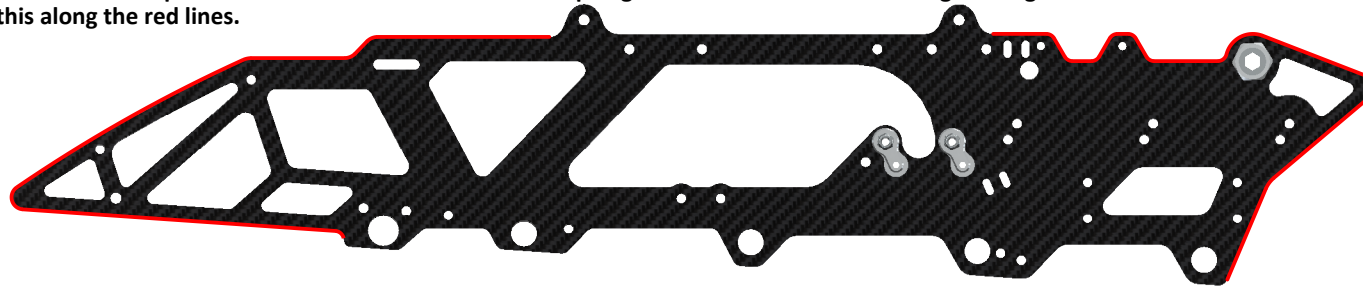

RIGHT UPPER FRAME ASSEMBLY

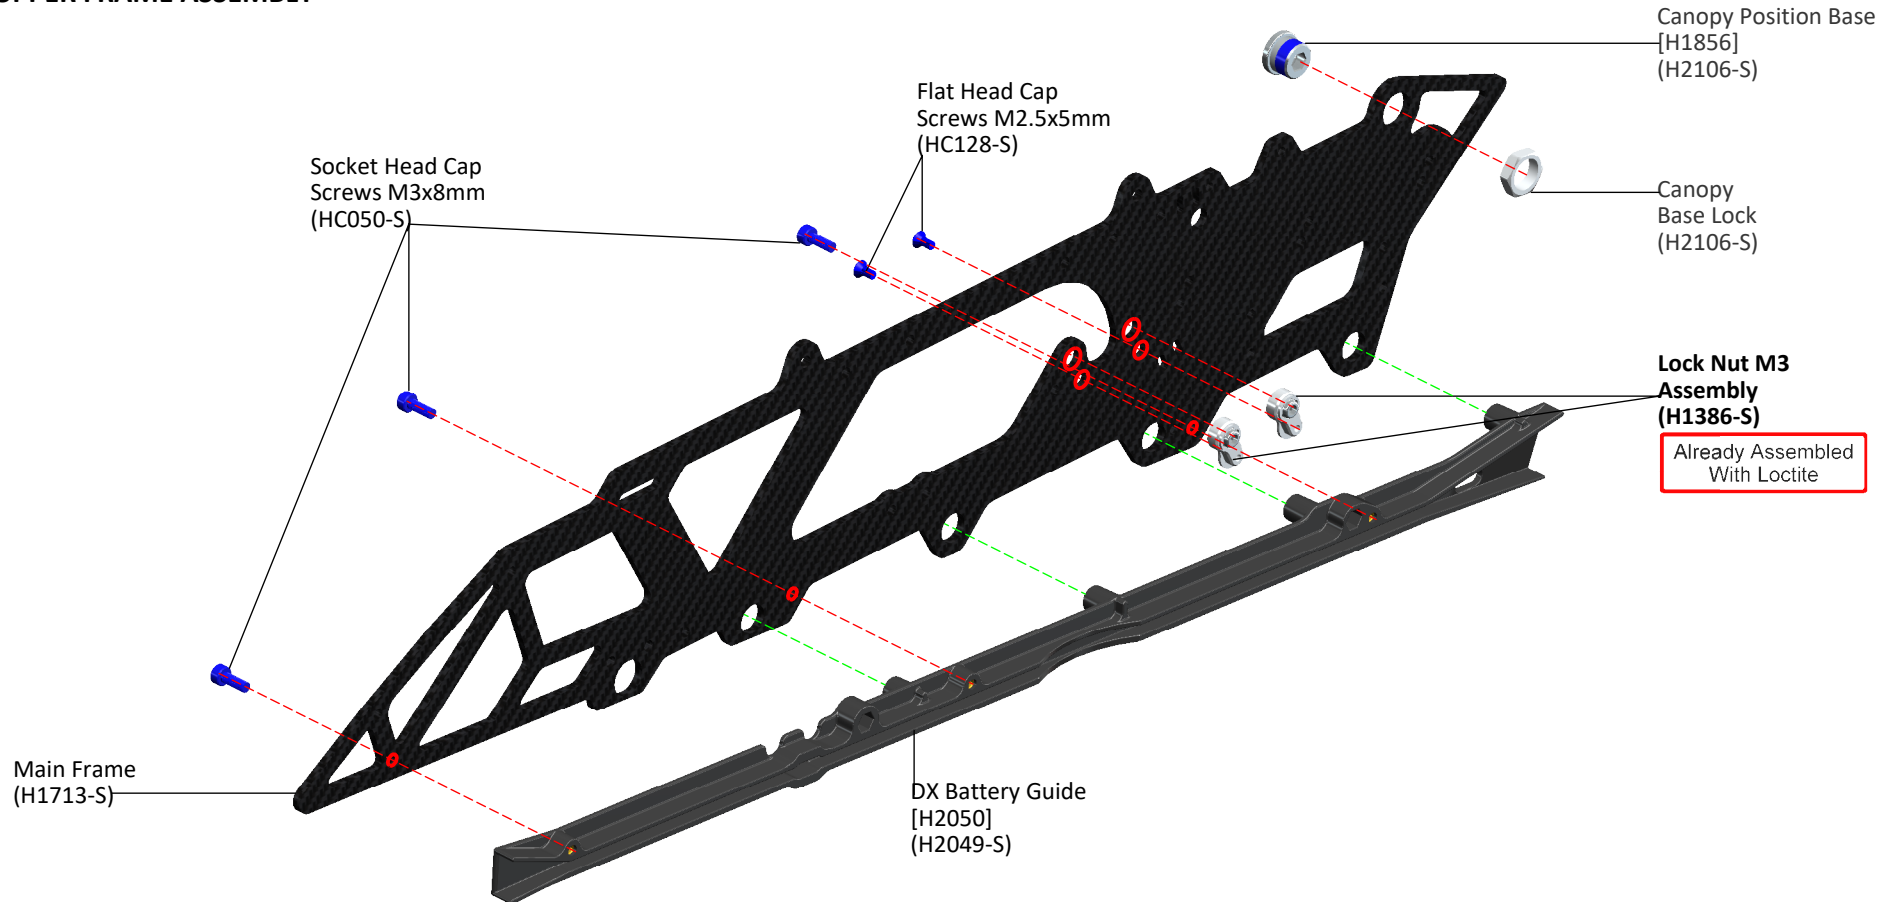




SB763


Raw
GOBLIN

FRAME GROUP ASSEMBLY

BOXES 1-3, BAG FOR PAGE 9

LEFT UPPER FRAME ASSEMBLY

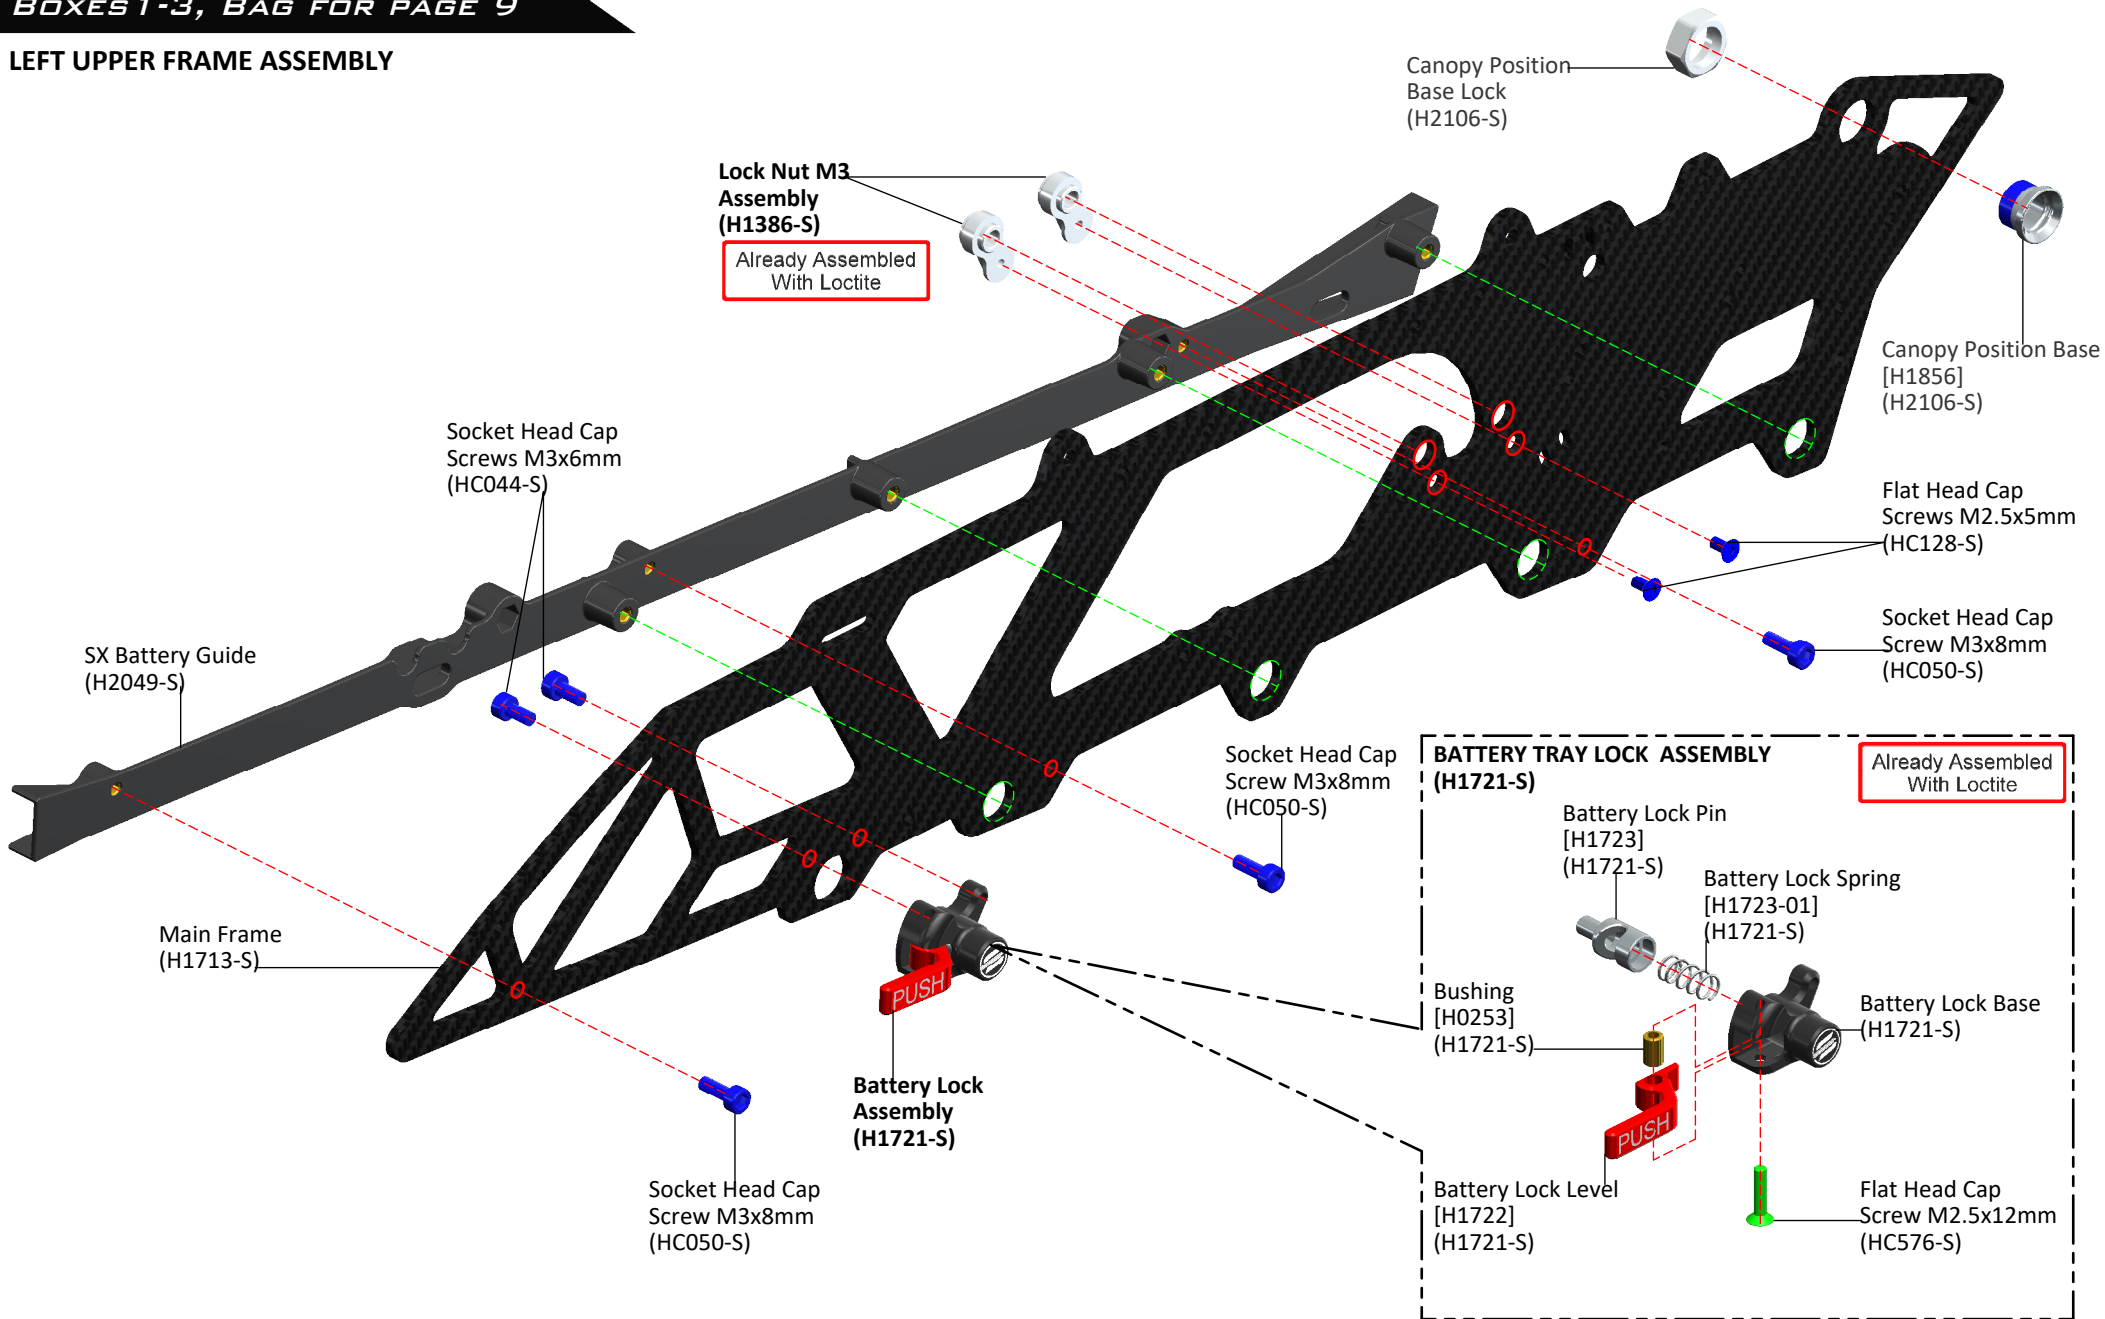


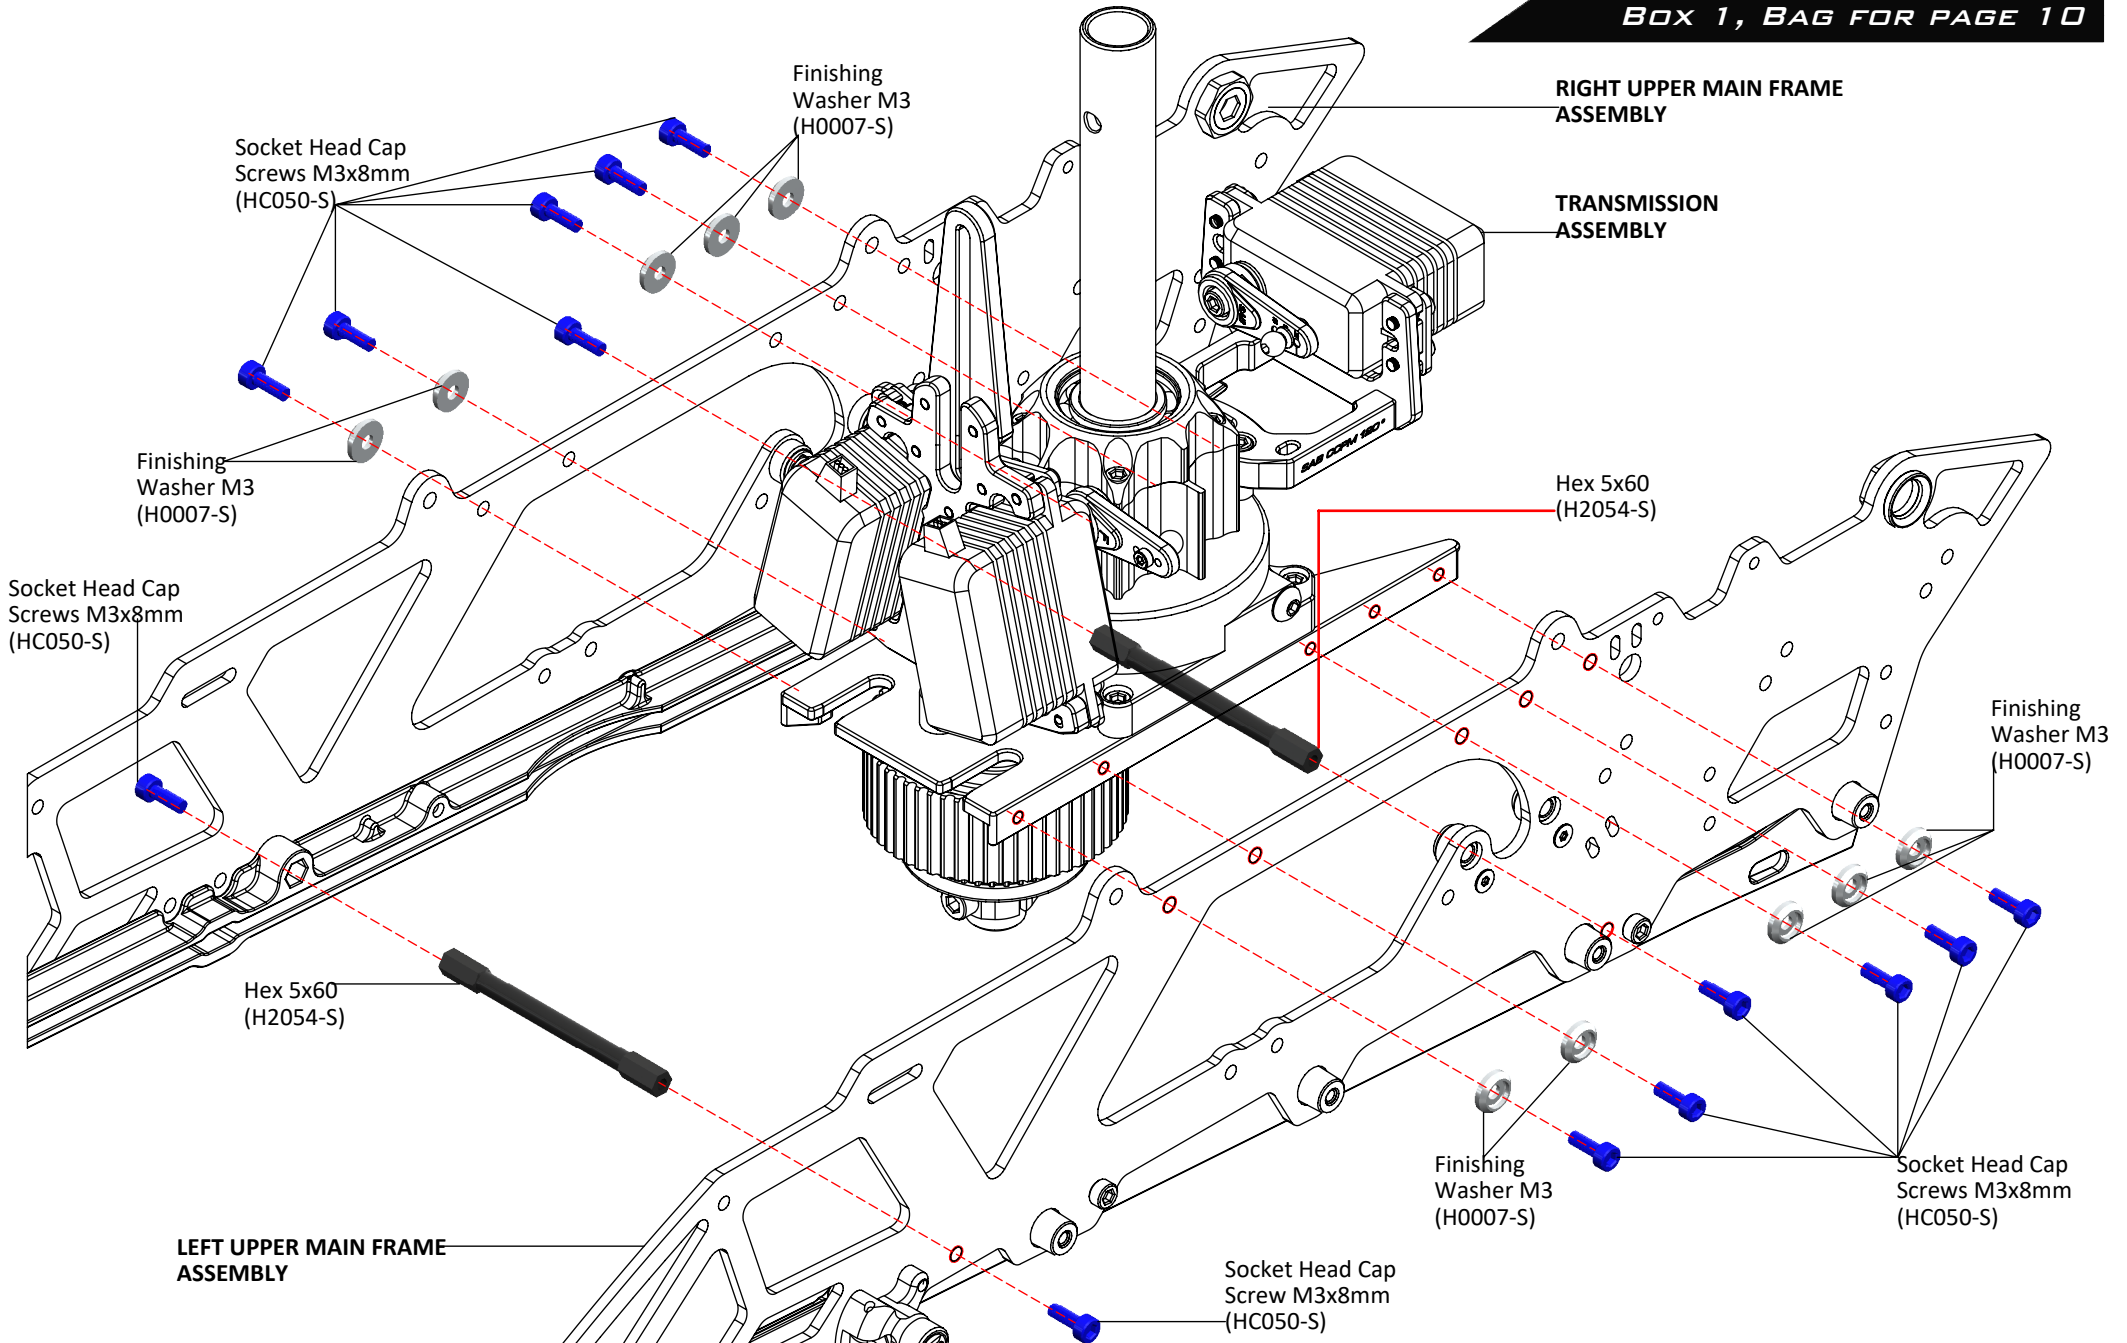




BOXES 1-2, BAG FOR PAGE 11

UNIBALL RADIUS ARM ASSEMBLY ...X2

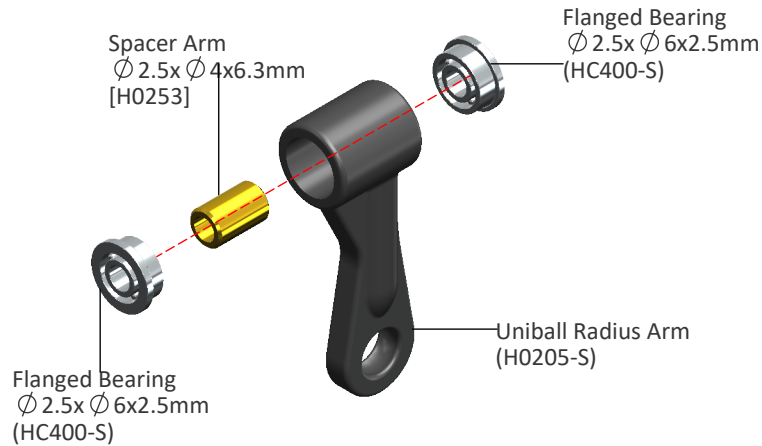


CENTER HUB ASSEMBLY

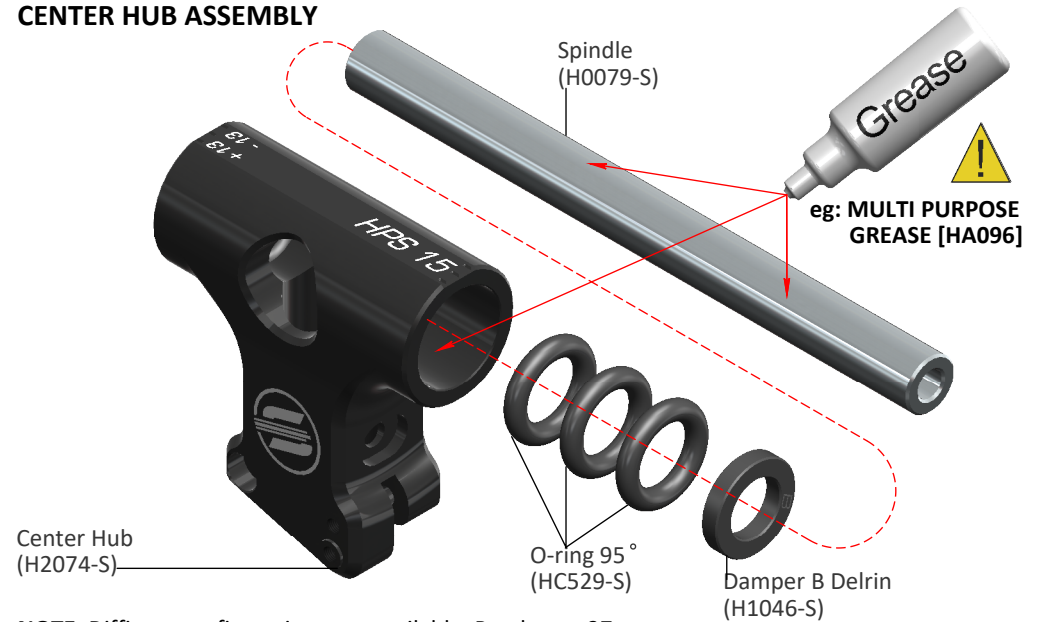


NOTE: Different configurations are available. Read page 37.

RADIUS ARM ASSEMBLY ...X2

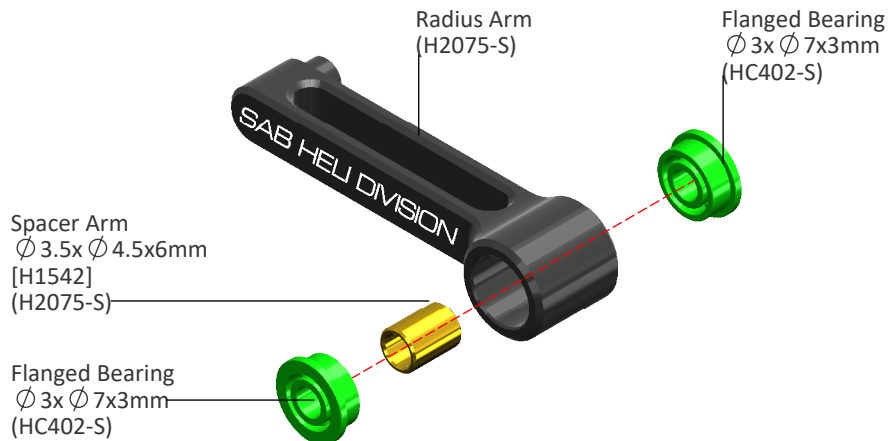



PLEASE USE GREEN THREAD LOCK to secure the bearings to the radius arms. Failure to secure the bearing will result in excessive slop/play.

LINKAGE ROD A ASSEMBLY ...X2

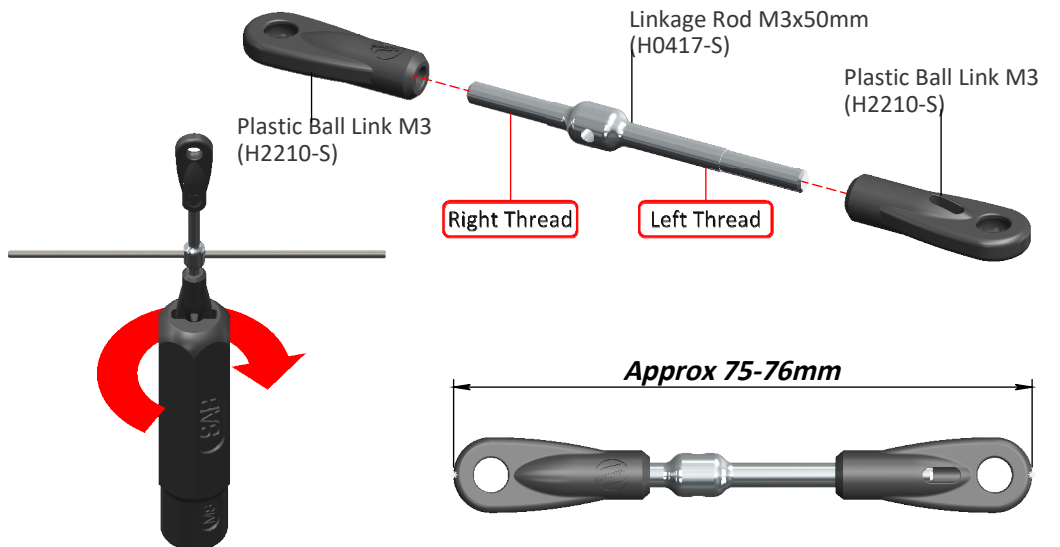


Note: You can use HA016 to easily thread the plastic link onto the rods.

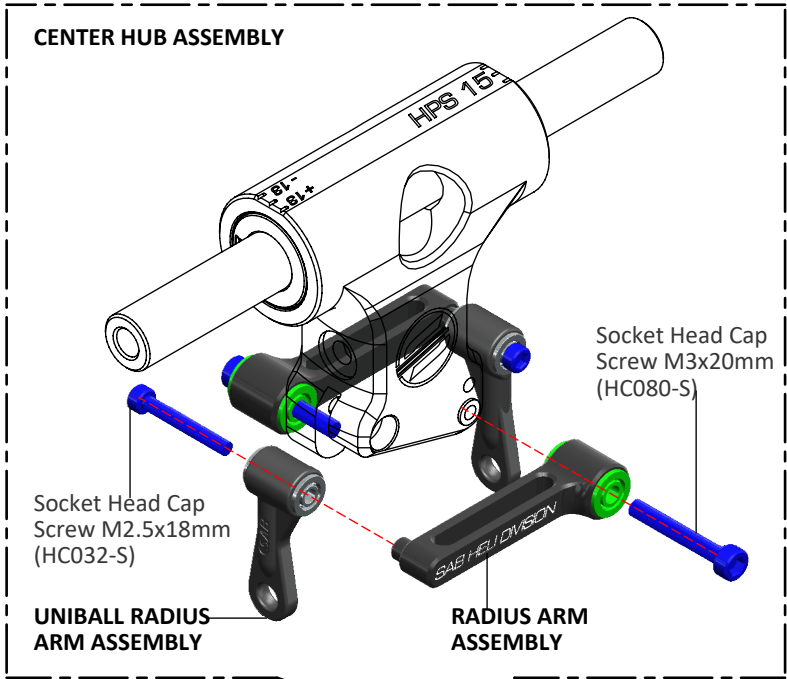

NOTE: 
 Shim $\phi 10 \times \phi 16 \times 0.2$ mm [HC232-S] [Bag Shims]. After approximately 40/50 flights, please check preload, you can add one 0.2mm shim (HC232) on each side if preload has changed. However, we suggest to replace the o-rings after about 100 flights.


eg: MULTI PURPOSE GREASE [HA096]

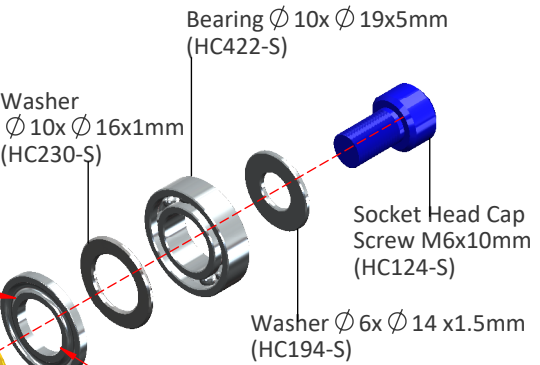

Blade Grip Assembly (H1790-S)
Already assembled with 1 bearing

Note: Smaller ID


Note: Larger ID


Suggested:
 Use this hole to apply grease after several flights

Lip Facing Bearing Side

Washer $\phi 10.1 \times \phi 16 \times 1$ mm (H2146-S)

Socket Head Cap Screw M4x10mm (HC102-S)

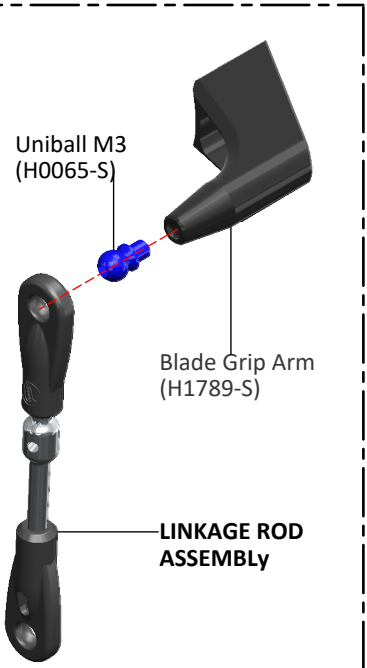




SE763

Raw
GOBLIN

ASSEMBLING OF THE MODULES

BOXES 1-2, BAG FOR PAGE 13



SWASHPLATE ASSEMBLY

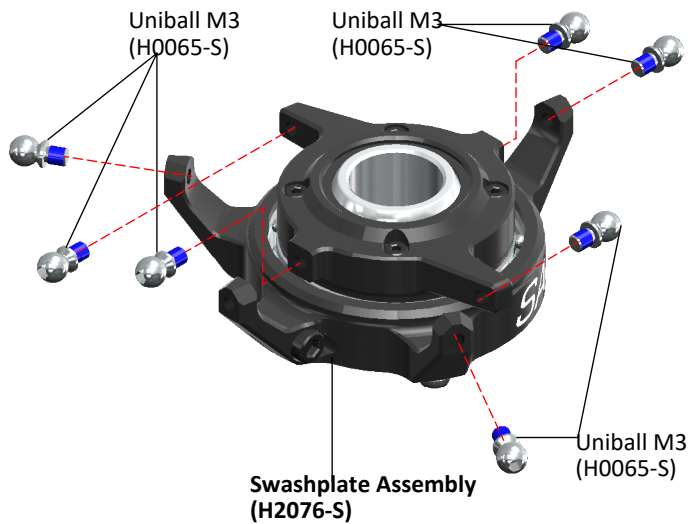

Socket Head Cap Screw M3x12mm (HC062-S)

Socket Head Cap Screw Shoulder M4x24mm (HC111-S)

Reference Pin (H1048-S)

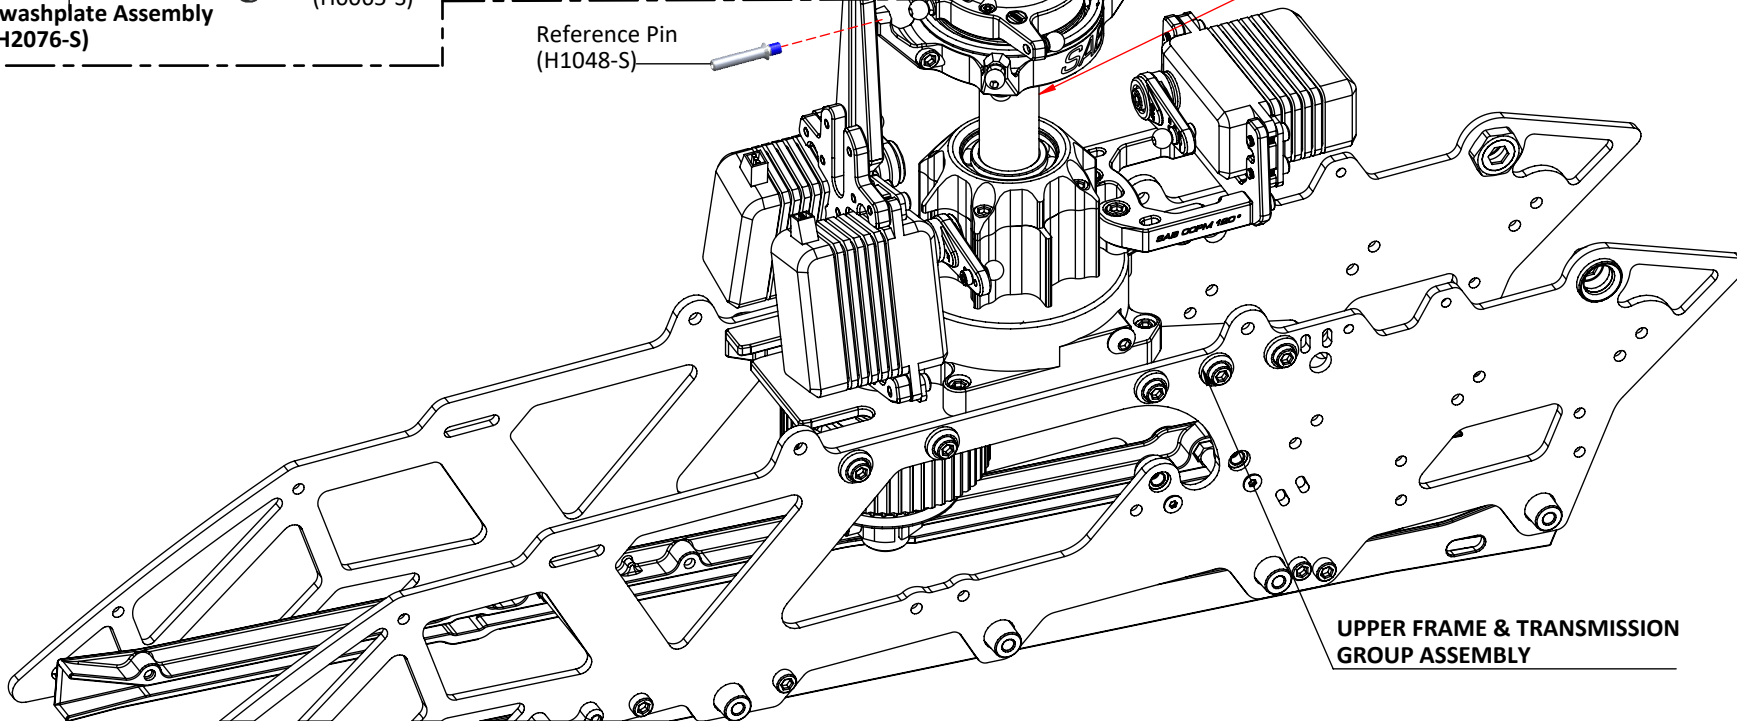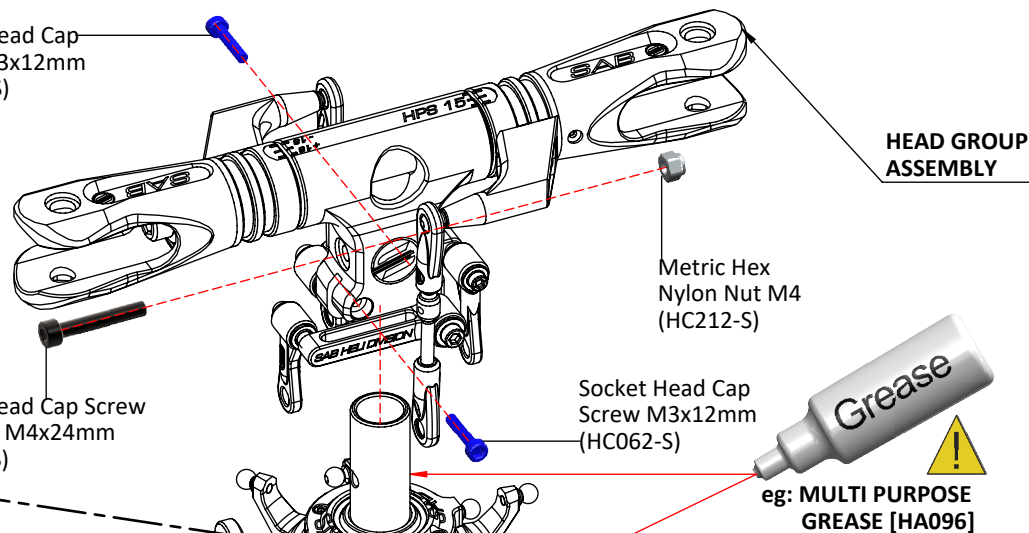

LINKAGE ROD B ASSEMBLY ... X3


Approx 47mm

Plastic Ball Link M2.5 (H2209-S)



Plastic Ball Link M2.5 (H2209-S)

Set Screw M2.5x18mm (HC140-S)

Initial length for the rods from the servos to the swash plate.

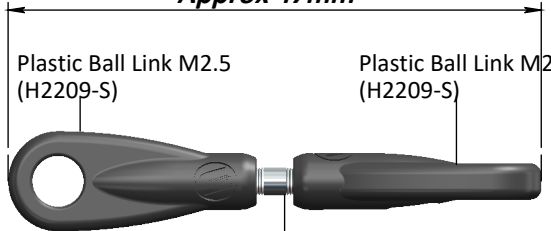

SUGGESTED:
You can use the Swashplate Leveler H2207-S (Not included KIT)

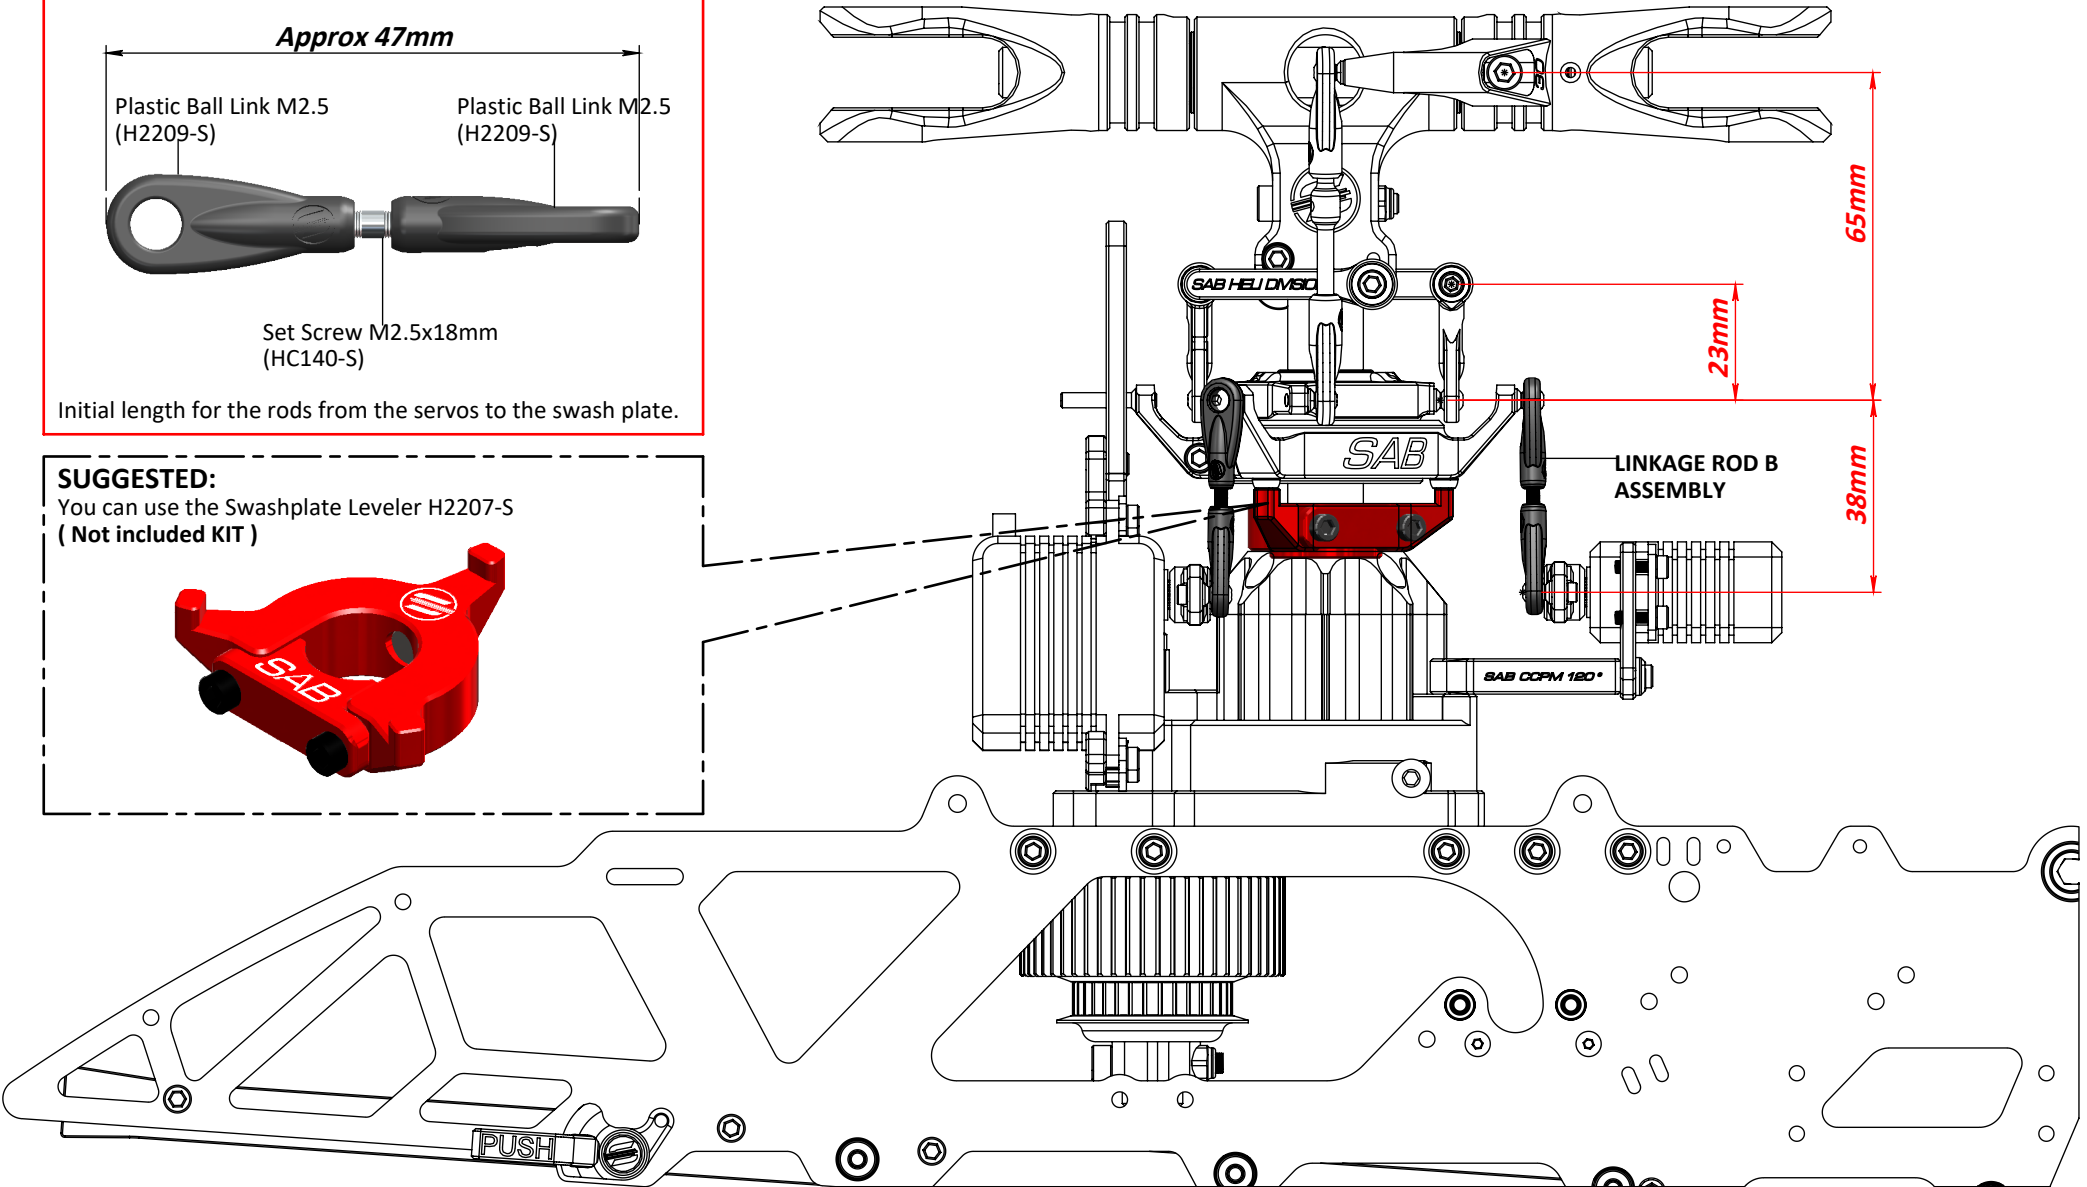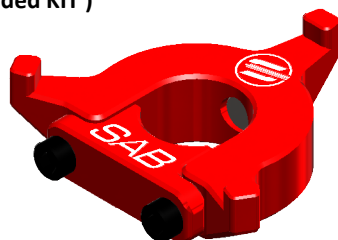





SE763

GOBLIN *Raw*

LOWER SIDE FRAME INSTALLATION

BOX 1, BAG FOR PAGE 15

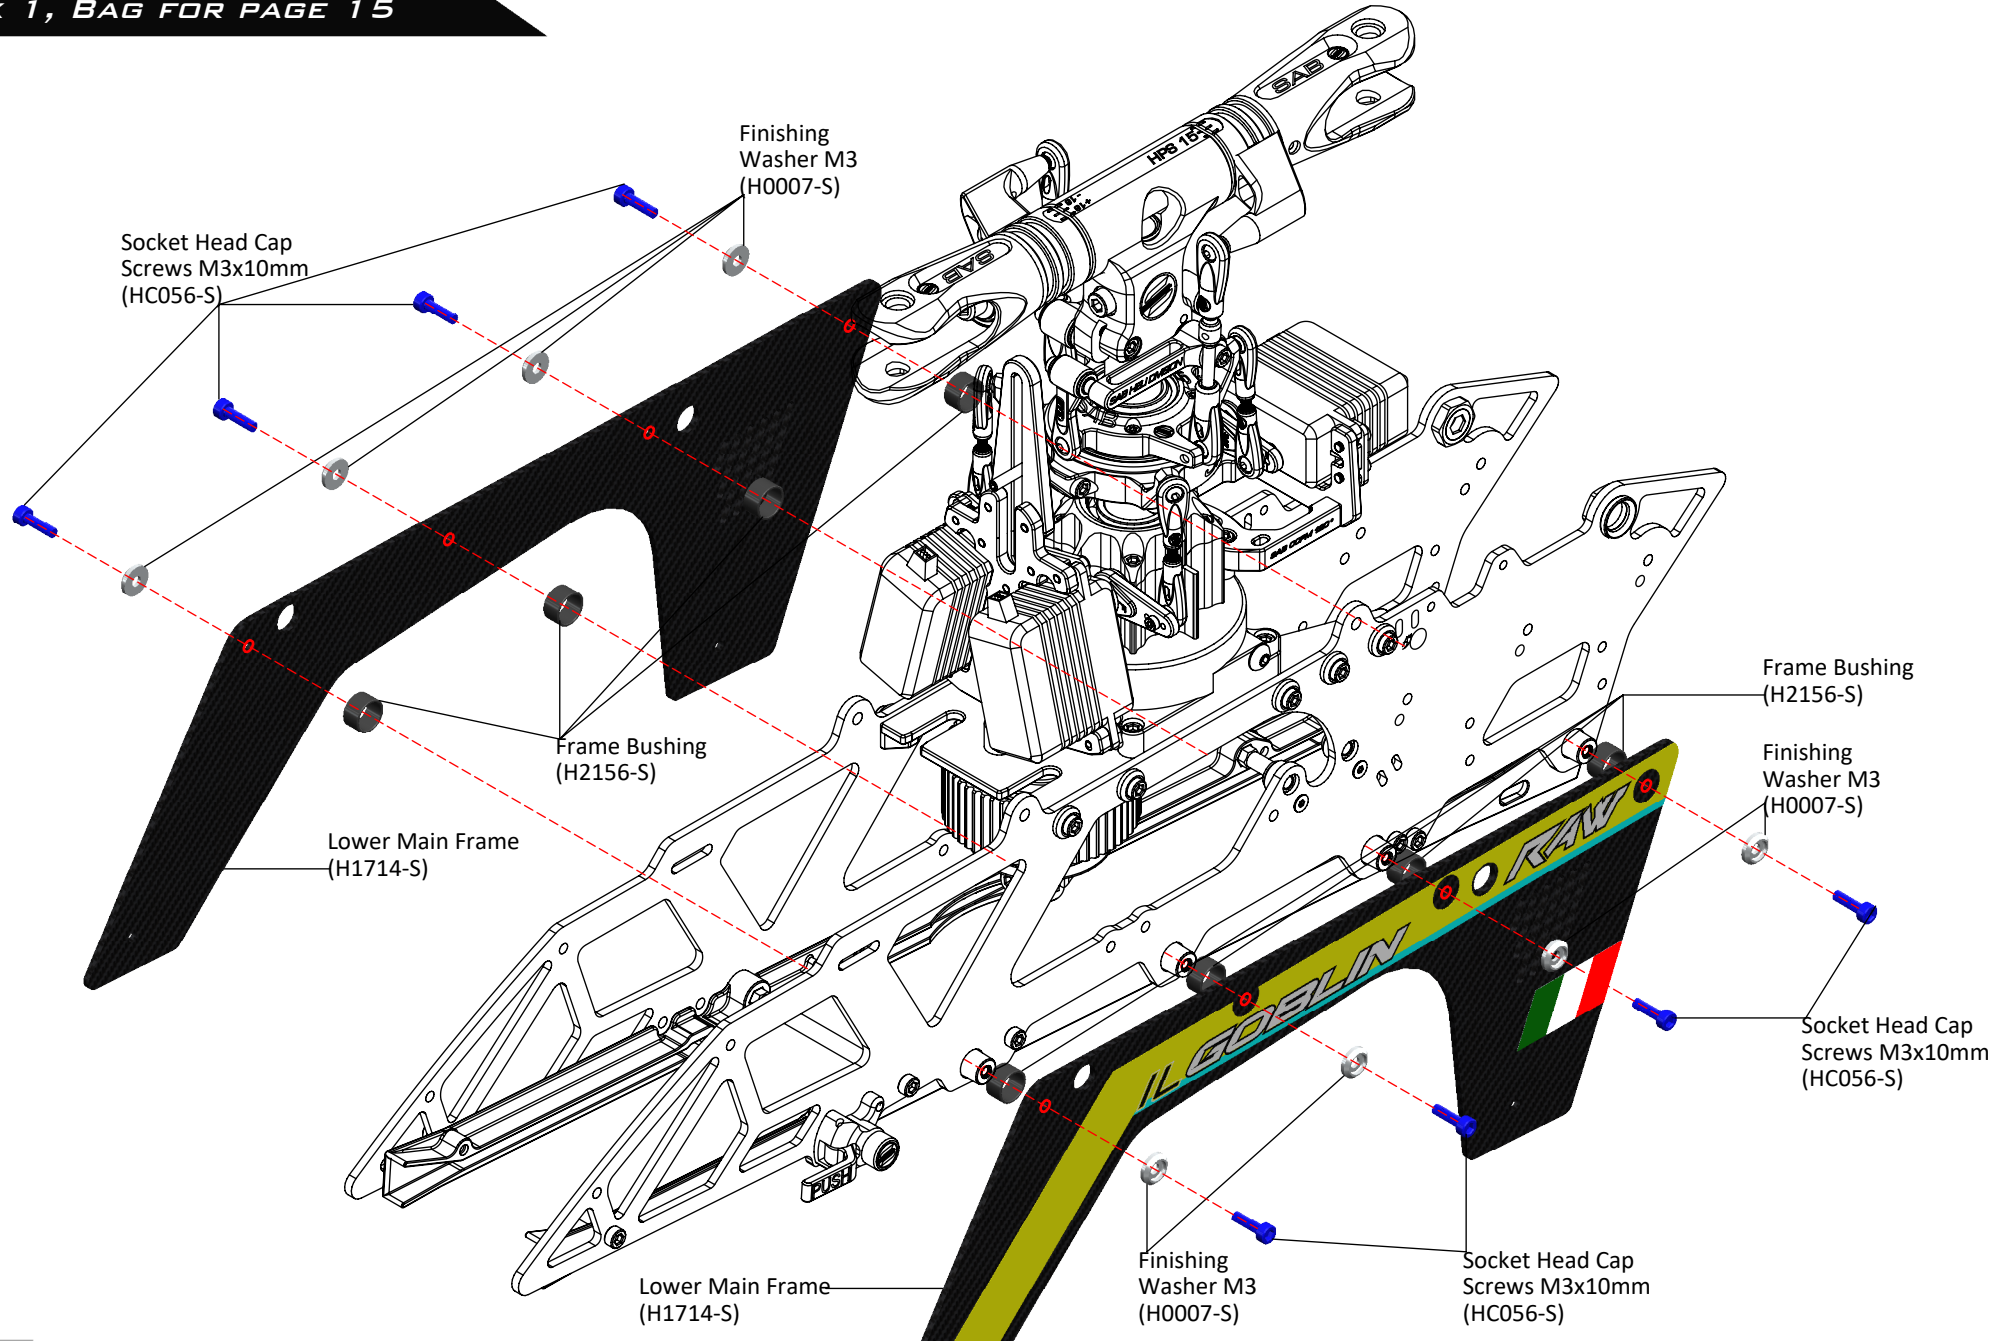

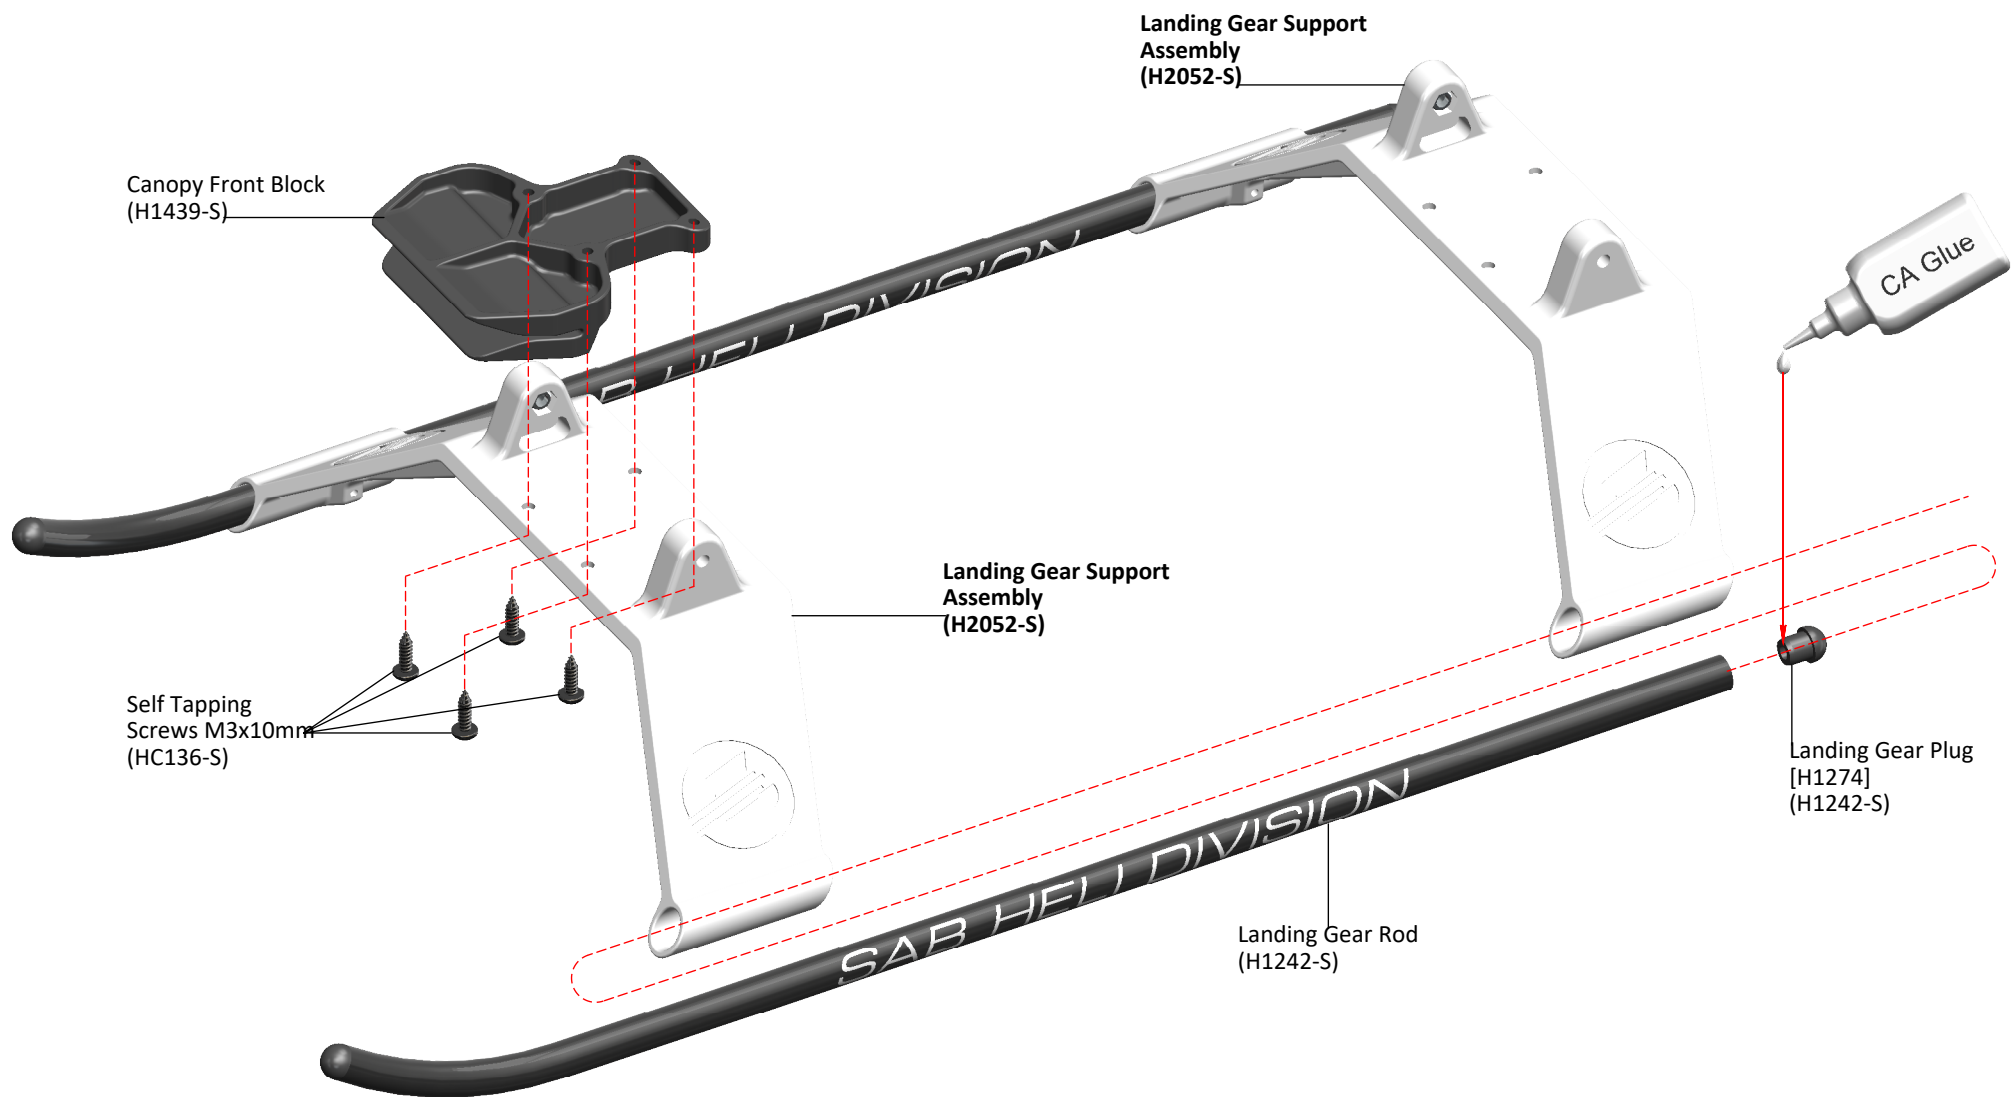




SB763

RAW
GOBLIN

LANDING GEAR INSTALLATION

BOX 1, BAG FOR PAGE 17

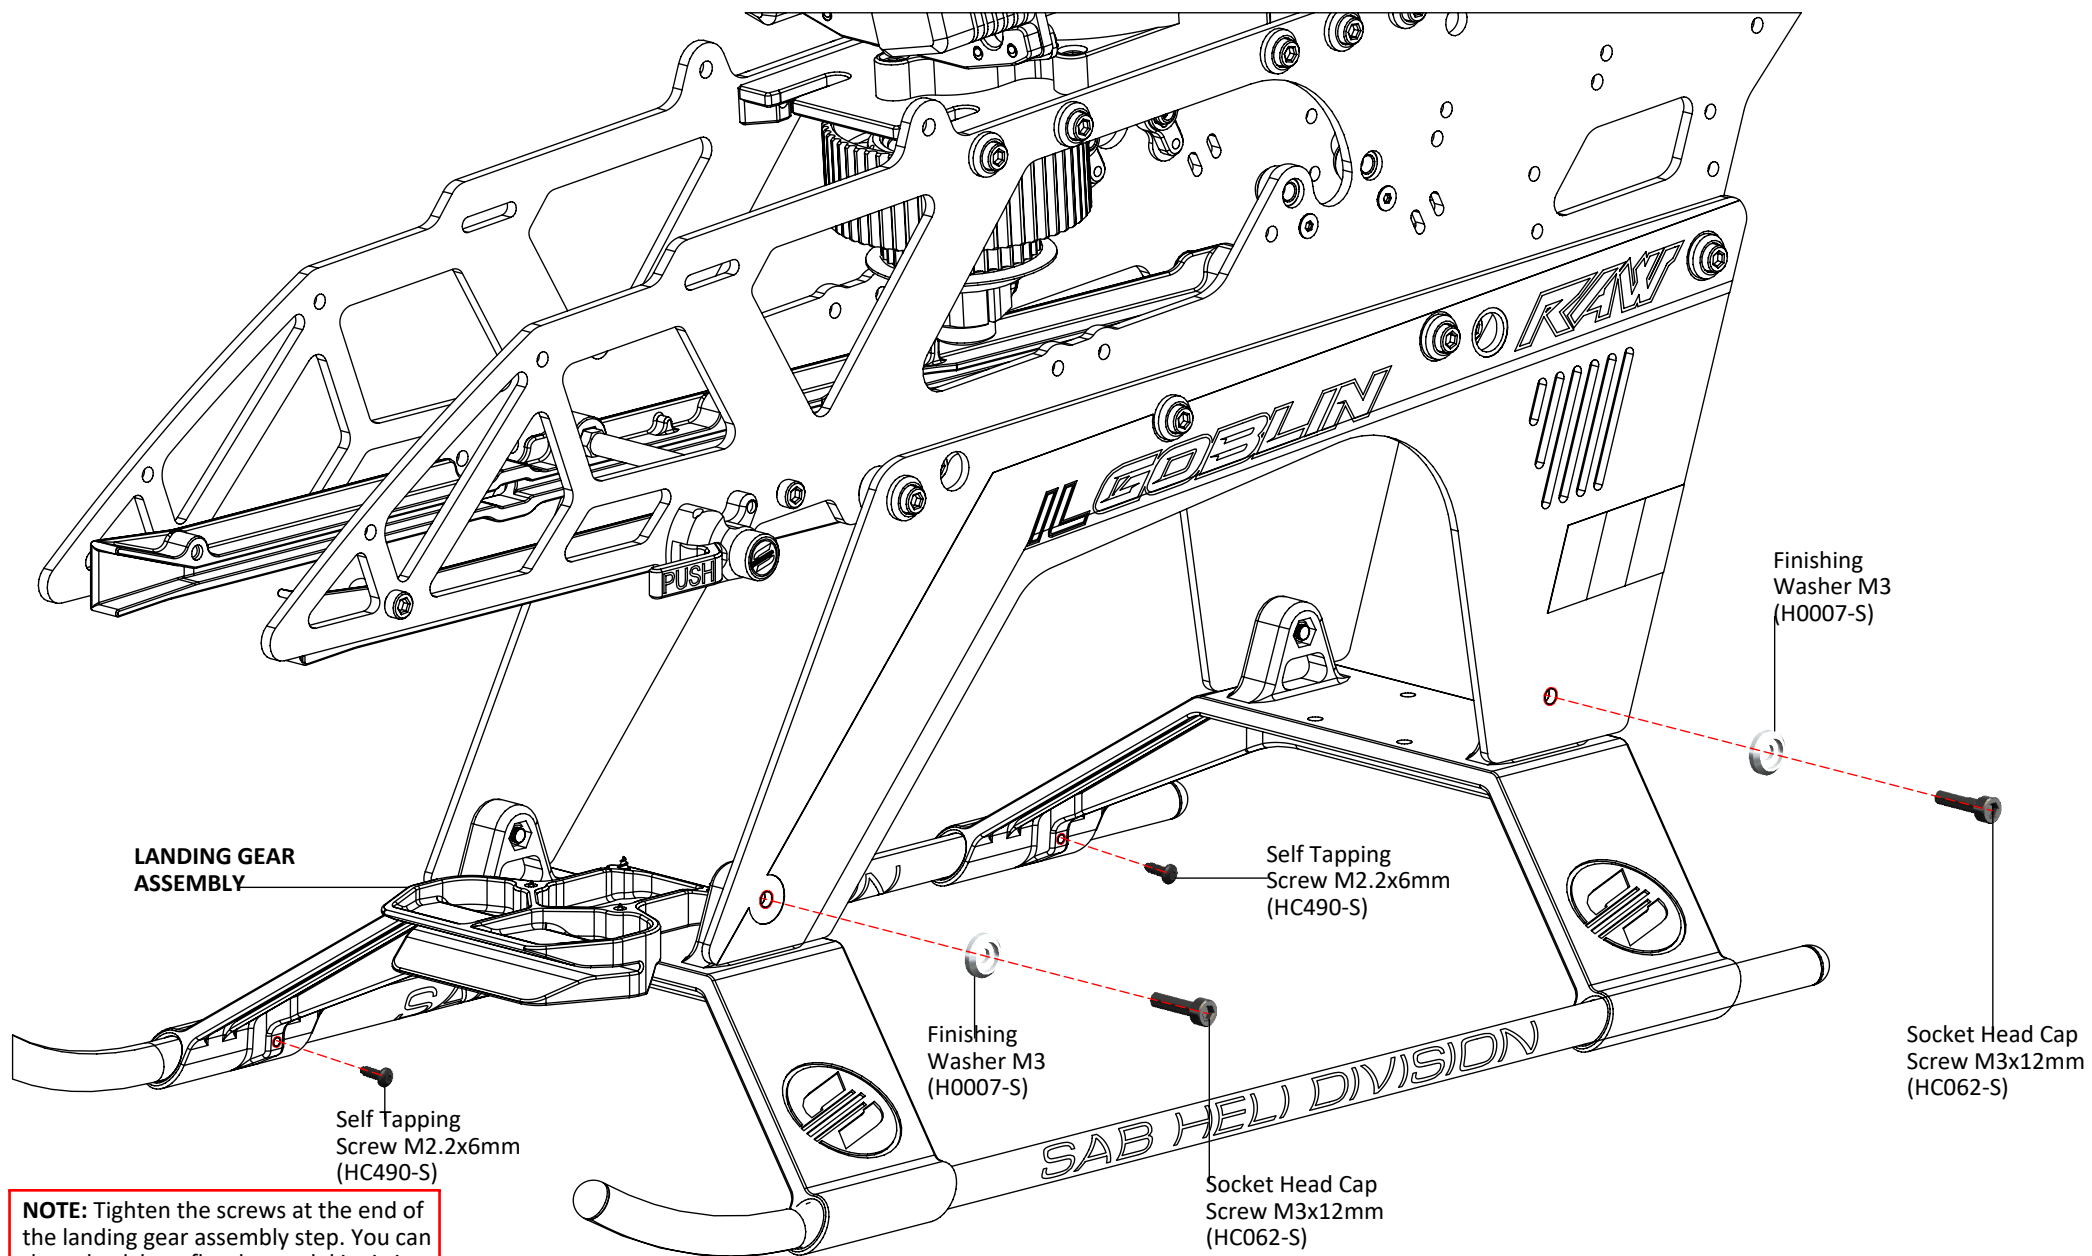

NOTE: Tighten the screws at the end of the landing gear assembly step. You can then check how flat the model is sitting.

TRANSMISSION SETUP

It is important to choose the right reduction ratio to maximize efficiency based on your required flight performance.

It is recommended to use wiring and connectors appropriate for the currents generated in a helicopter of this class.

If you are using a head speed calculator which requires a main gear and pinion tooth count, use 212 teeth for the main gear (this takes into account the two stage reduction) and the tooth count of your pulley as the pinion count.

BELOW IS A LIST OF AVAILABLE REDUCTION RATIOS:

H0175-18-S - **18T** Pinion = ratio **11.8:1**

H0175-22-S - **22T** Pinion = ratio **9.6:1**

H0175-19-S - **19T** Pinion = ratio **11.2:1**

H0175-23-S - **23T** Pinion = ratio **9.2:1**

H0175-20-S - **20T** Pinion = ratio **10.6:1**

H0175-24-S - **24T** Pinion = ratio **8.8:1**

H0175-21-S - **21T** Pinion = ratio **10.1:1**

H0175-25-S - **25T** Pinion = ratio **8.4:1**

ILGOBLIN RAW CONFIGURATIONS					
Battery	Motor	ESC	Pinion (a, b)	RPM Max (a, b)	Pitch
12S 4200/5500 mAh	Scorpion HK5-4525-535kv	HW HV180 V5	21T / 22T	2100/2200	± 12
	Xnova 4525-530kv lightning	Kosmik 170HV			
	Pyro 750-560 TENGU 4525HT/550KV	YGE 205HVT SCORPION II 14-200A	20T / 21T		
12S 4500/5500 mAh	Xnova 4530-525kv lightning	HW HV260 V5	22T / 23T	2200/2300	± 13
	Pyro 800-480	Kosmik 250HV	24T / 25T		
	Scorpion HK5-5024-535kv	YGE 205HVT SCORPION II 14-200A	21T / 22T		

Rev:01



SB763

RAW

INSTALLATION OF THE MOTOR/ESC

BOXES 1-2, BAG FOR PAGE 19

3rd Bearing Support Assembly (H0143-S)

Install the support after mounting the motor and installing the pulley. H0143-S does not need to be used with an 8mm motor shaft.

Motor Mount Assembly (H2056-S)

Already Assembled With Loctite

Socket Head Cap Screw M3x6mm (HC044-S)

Washer $\phi 5.3 \times \phi 15 \times 1 \text{mm}$ (HC188-S)

Metric Hex Nylon Nut M5 (HC218-S)

Set Screw M4x6mm (HC153-S)

Motor Pulley 21T (H0175-21-S)

Flat Head Cap Screws M4x6mm (HC351-S)

Motor Bushing [H0176] (H0175-S)

Use with 6mm motor shaft

ESC MOUNT ASSEMBLY

Flat Head Cap Screws M3x5mm (HC132-S)

CF ESC Mount [H1719] (H1718-S)

ESC Mount Spacer (H1718-S)

NOTE:
Motor wires pointing forward.


MIN : 28mm. Not use 3rd Bearing Support
MIN : 34mm. With 3rd Bearing Support
MAX: 40mm.

26.5-27.5mm

$\phi 8$ 5mm

MOTOR BELT TENSION

- *Fit the motor assembly into position.
- *Move it to the minimum center distance.
- *First put the belt on the motor pinion.
- *Then put the belt around the big pulley.
- *Rotate the motor several times by hand.
- *Pull on the motor mount to tension the belt.
- *Rotate again the motor several times by hand.
- *Provide the correct force, and properly tension the belt.
- *Tighten the M5 nuts first, then the (2) M3 screws later.

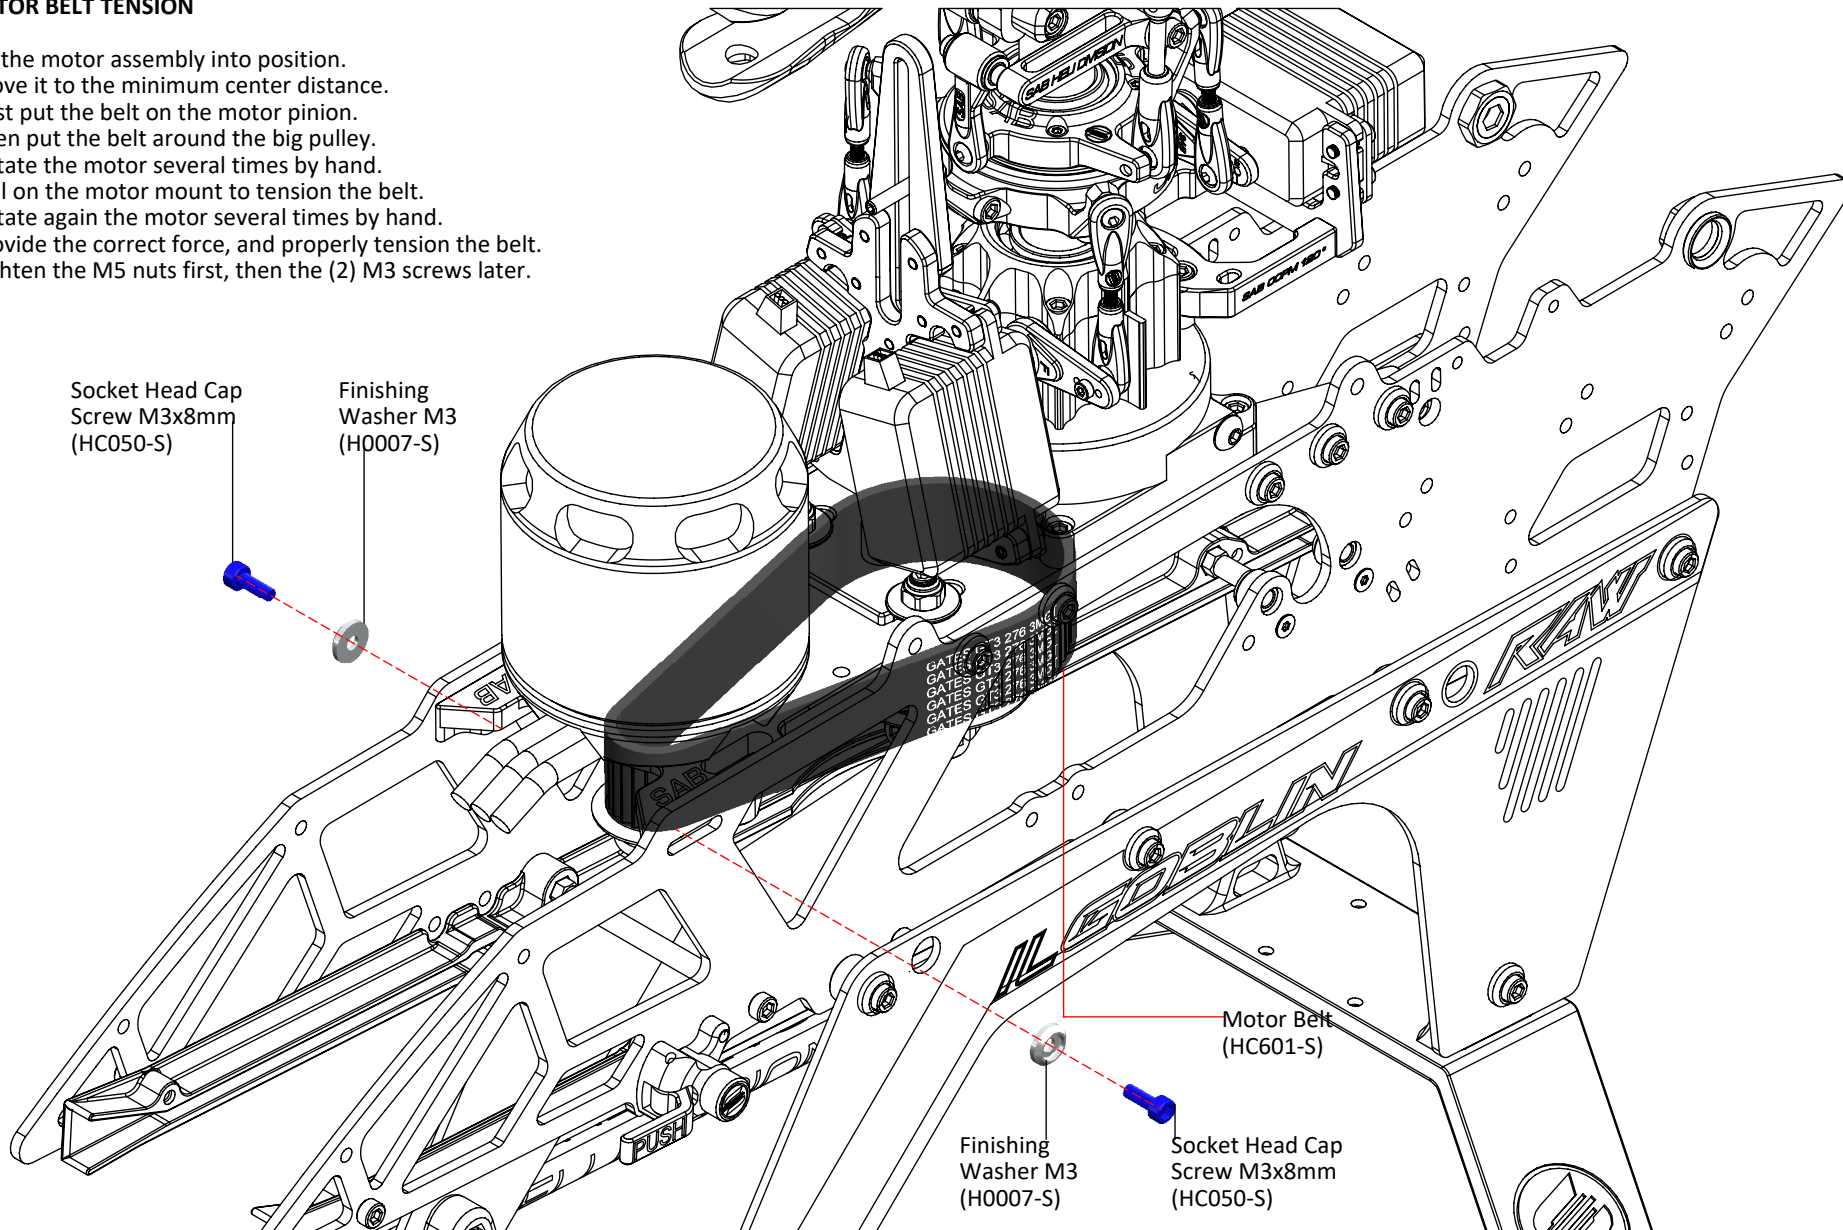





SB763


Raw
GOBLIN

INSTALLATION OF THE MOTOR/ESC

BOX 1, BAG FOR PAGE 21

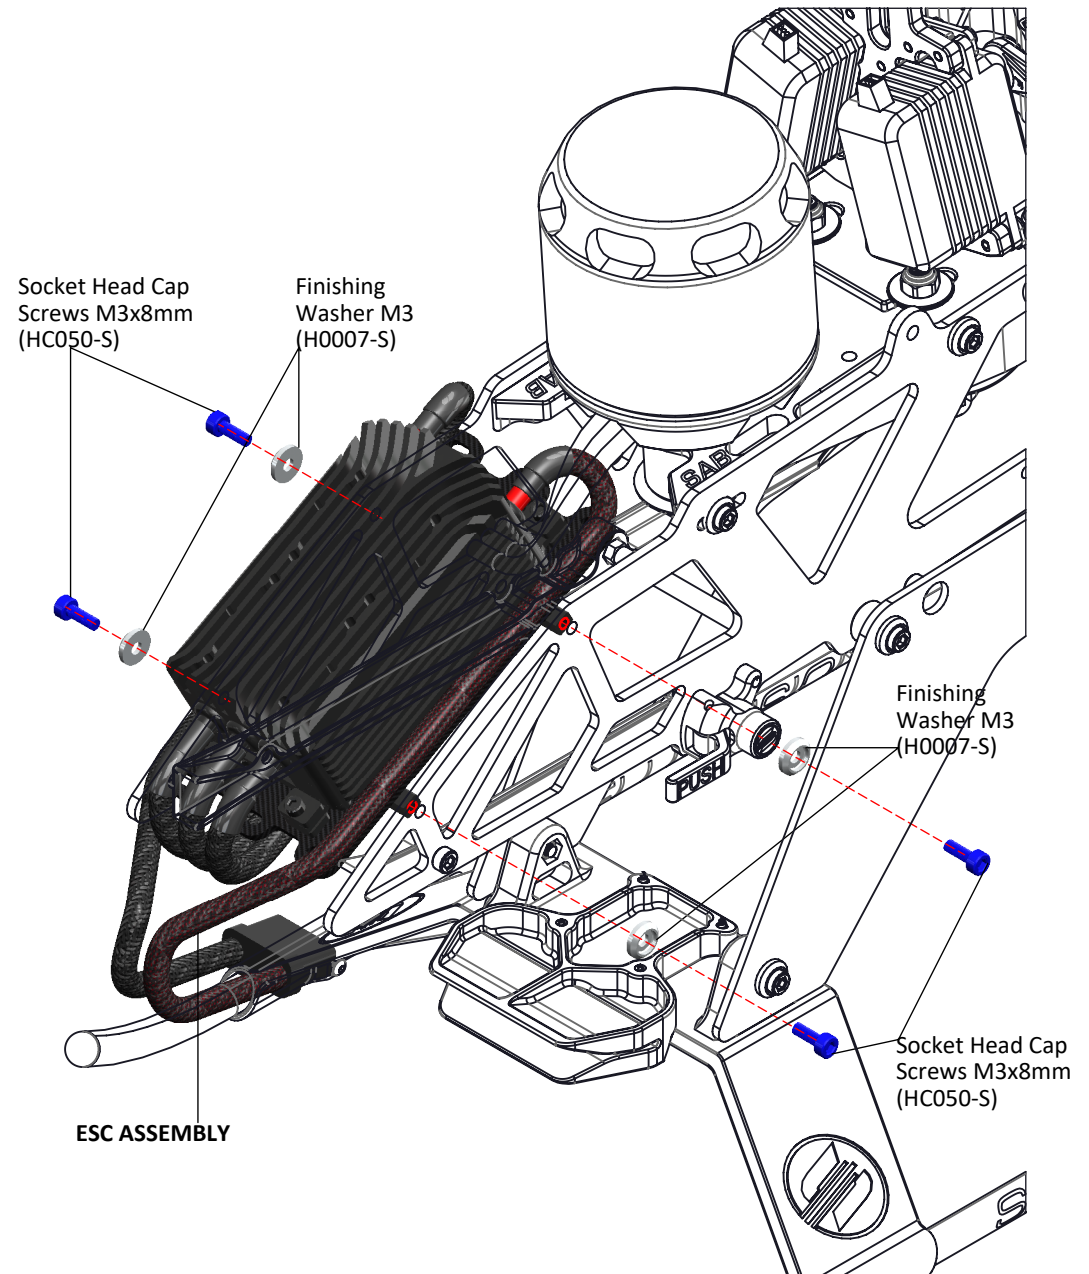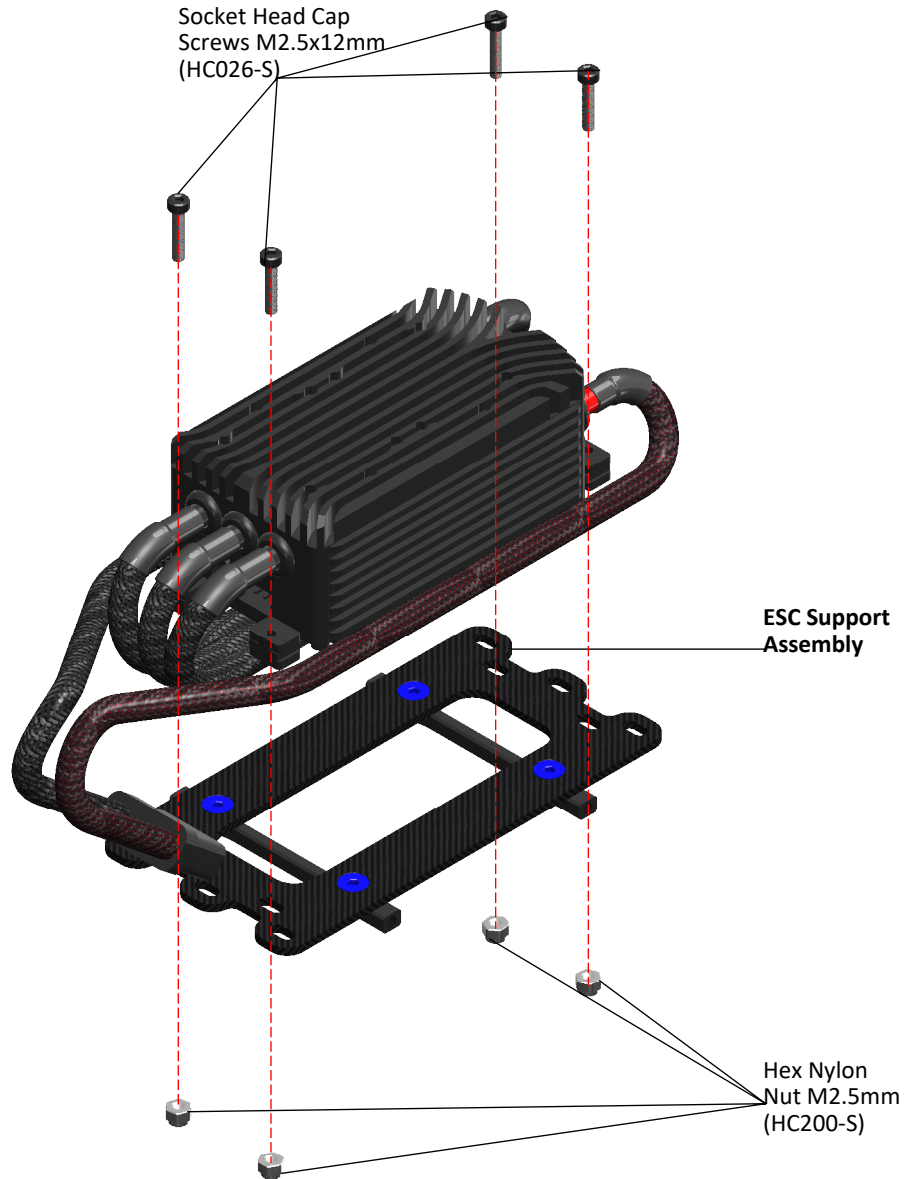

NOTE:
It is normal for the tail to feel a bit tight after initial assembly as the tail spindle preload is usually high when the helicopter is brand new. The preload will loosen up after 2-5 flights allowing the system to become smooth.

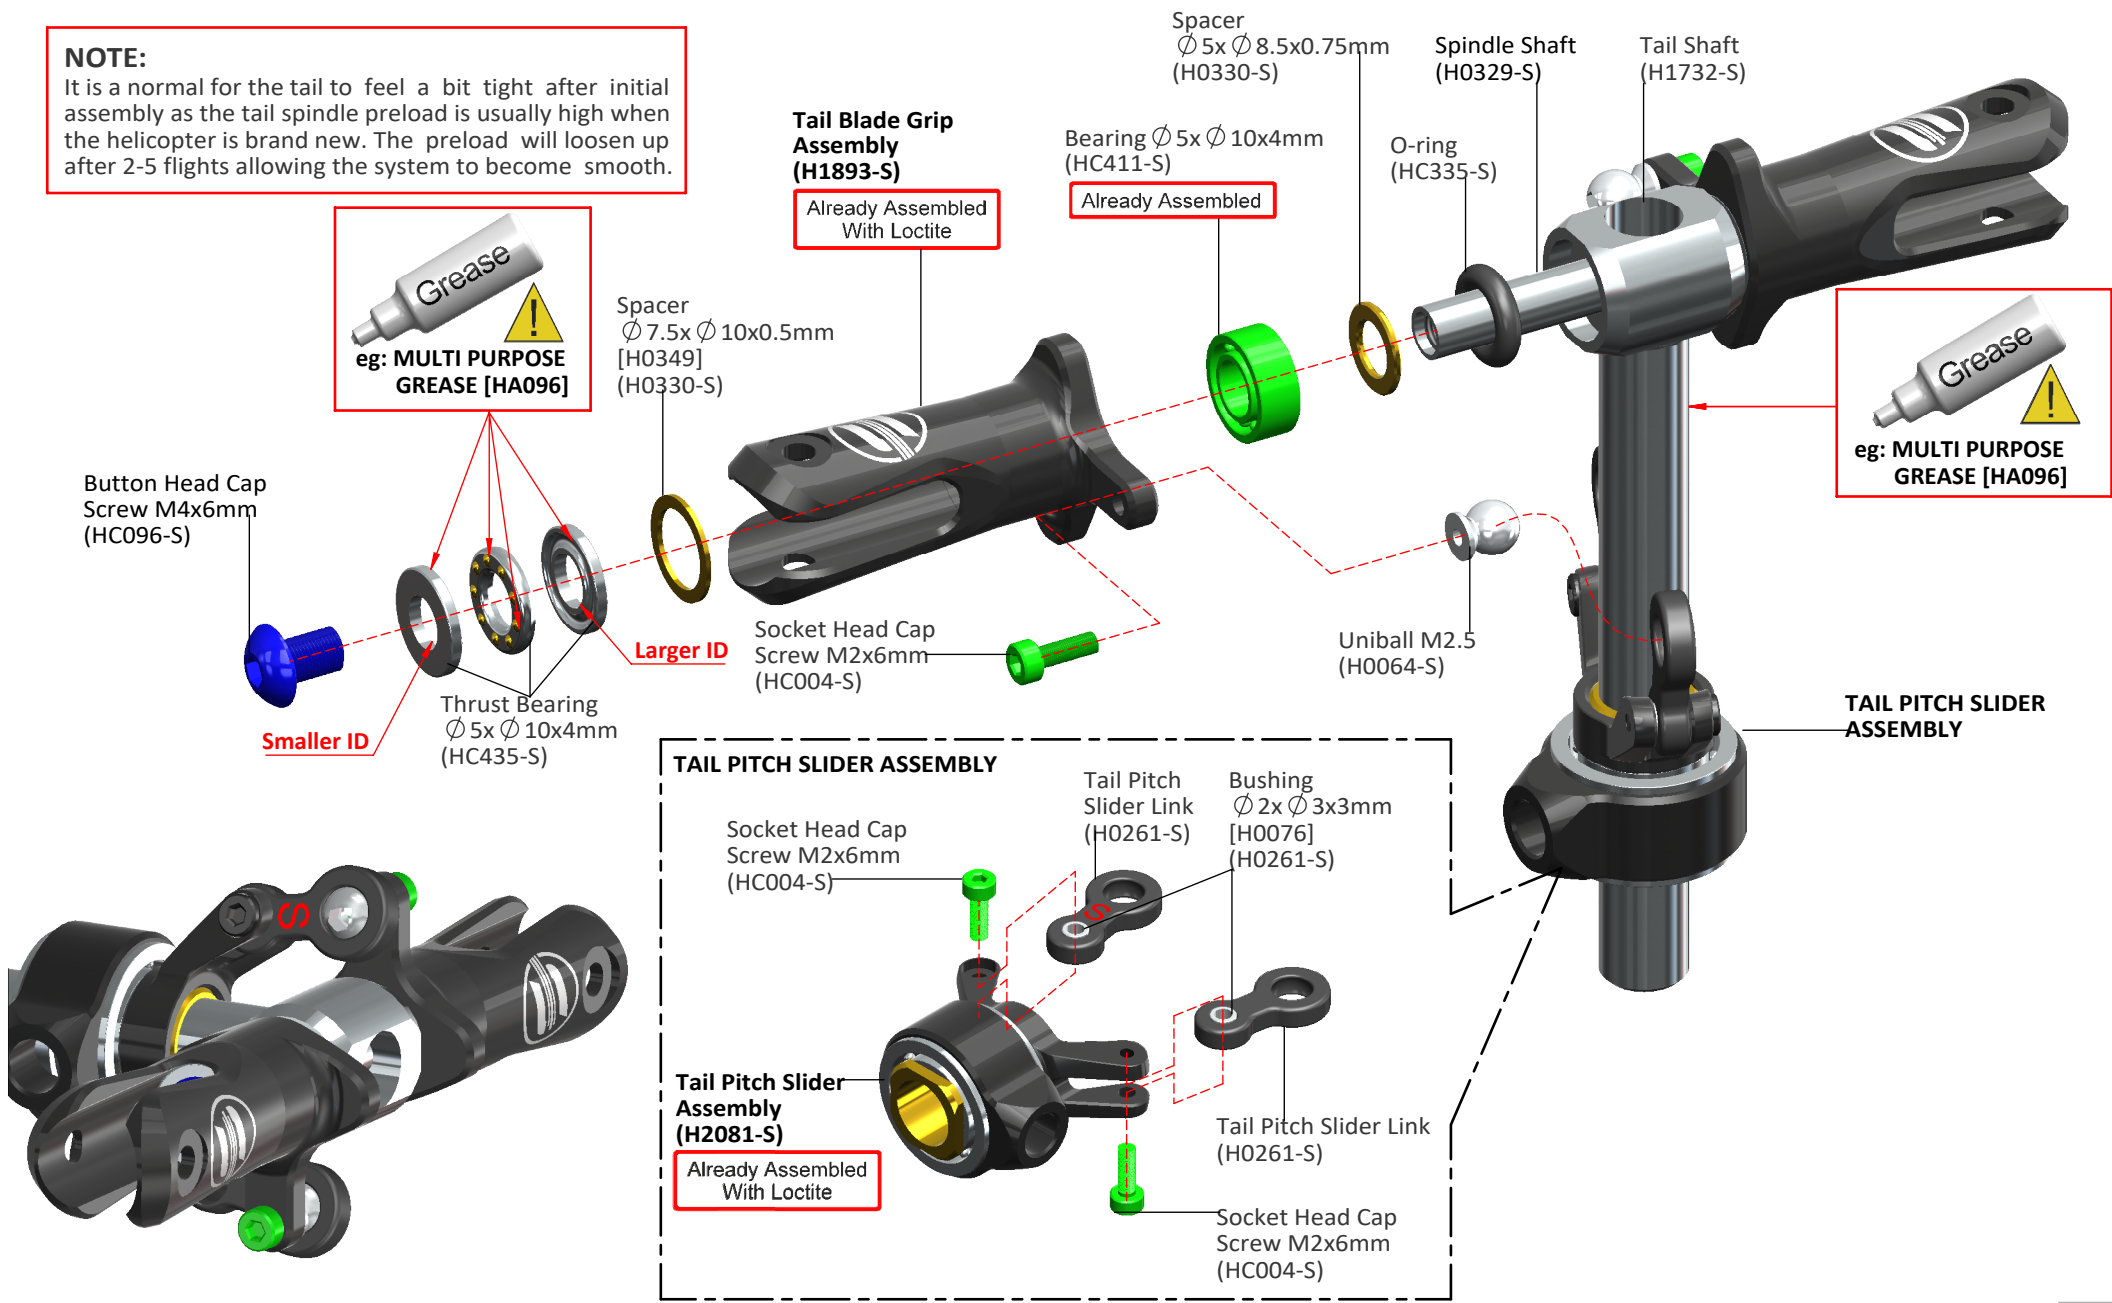







SB763

Raw
GOBLIN

TAIL GROUP ASSEMBLY

BOXES 1-2, BAG FOR PAGE 23

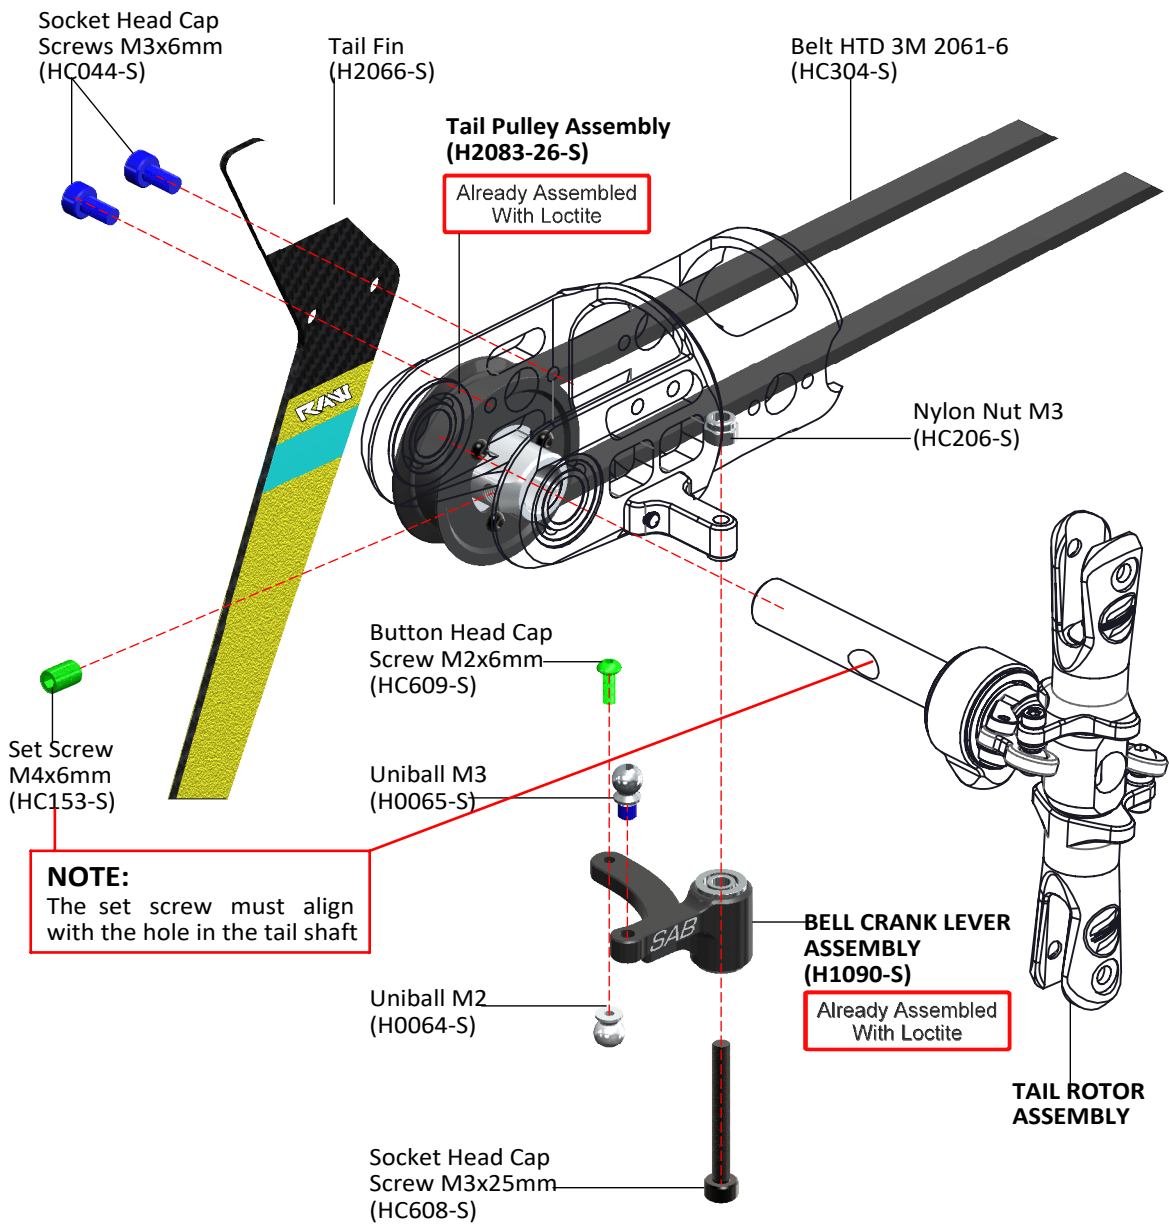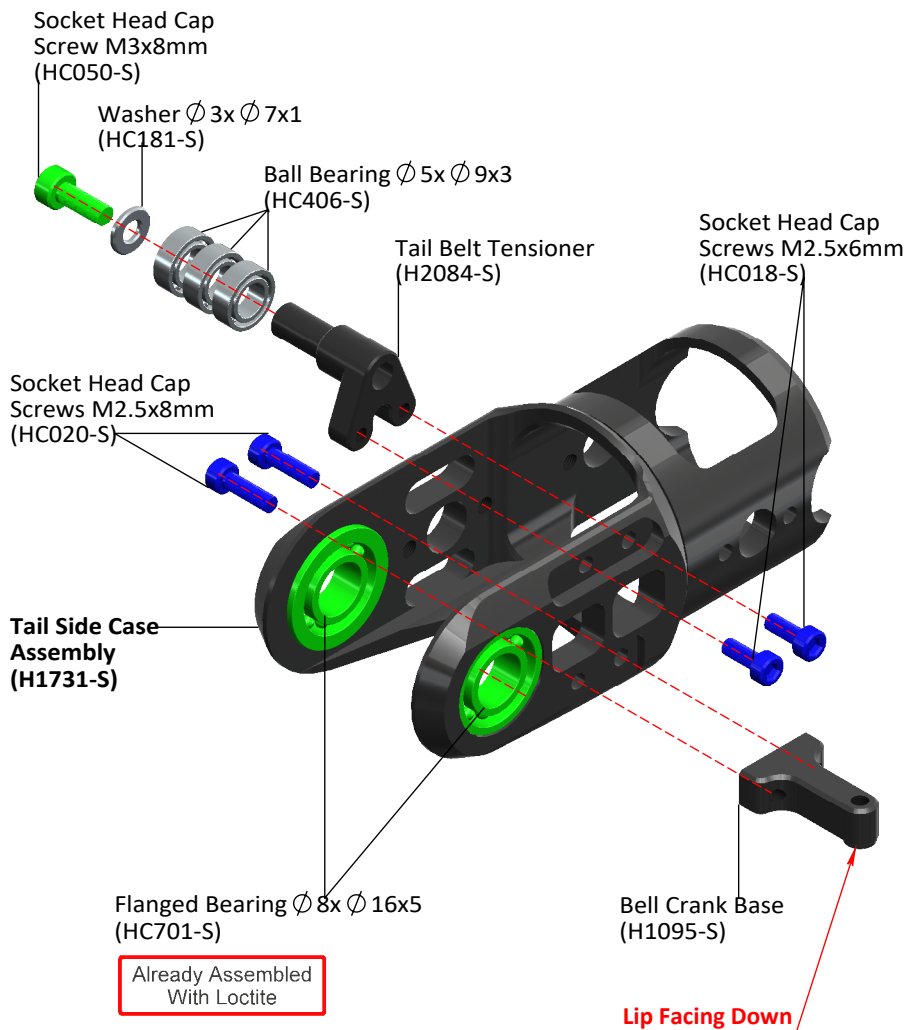

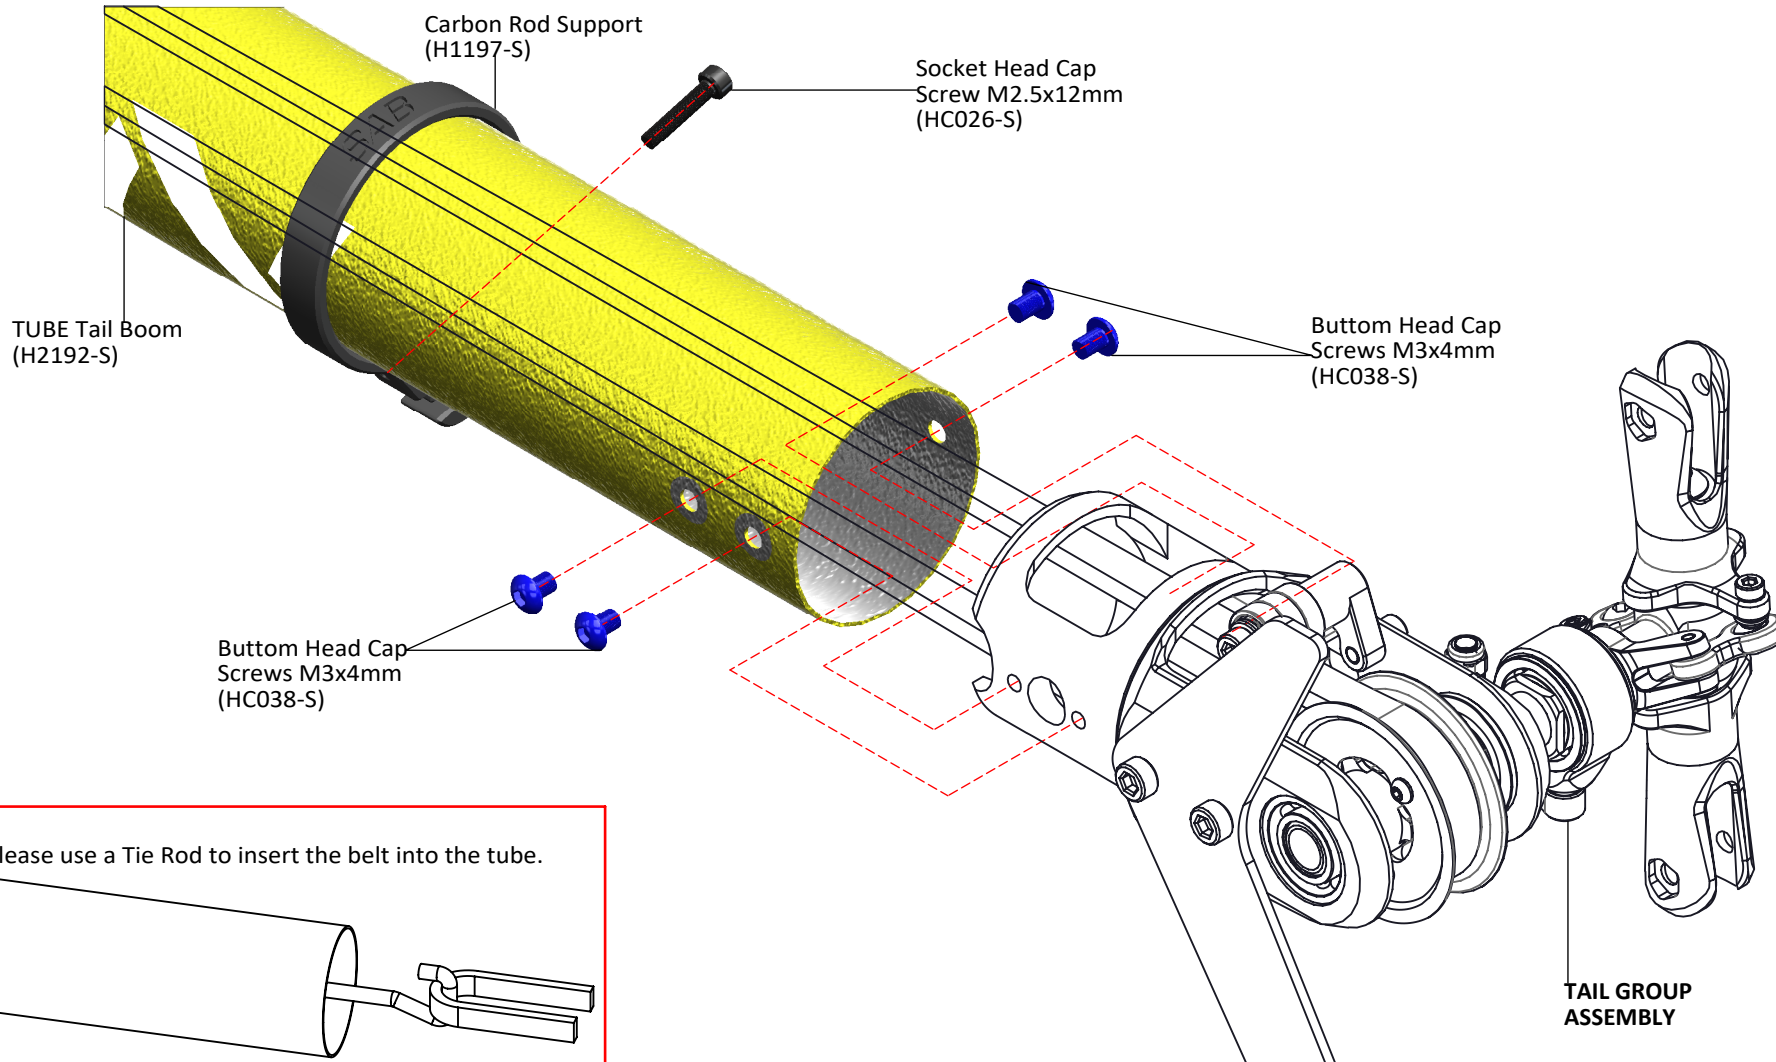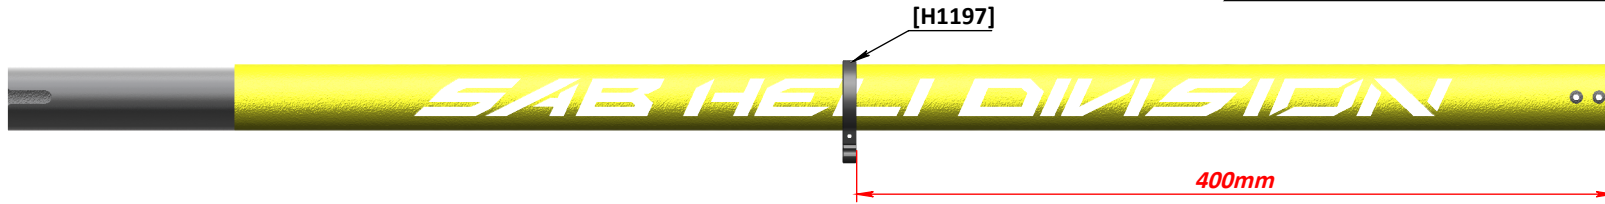

NOTE:
Please use a Tie Rod to insert the belt into the tube.





SE763



Raw
GOBLIN

TAIL BOOM ASSEMBLY



BOX 1, BAG FOR PAGE 25

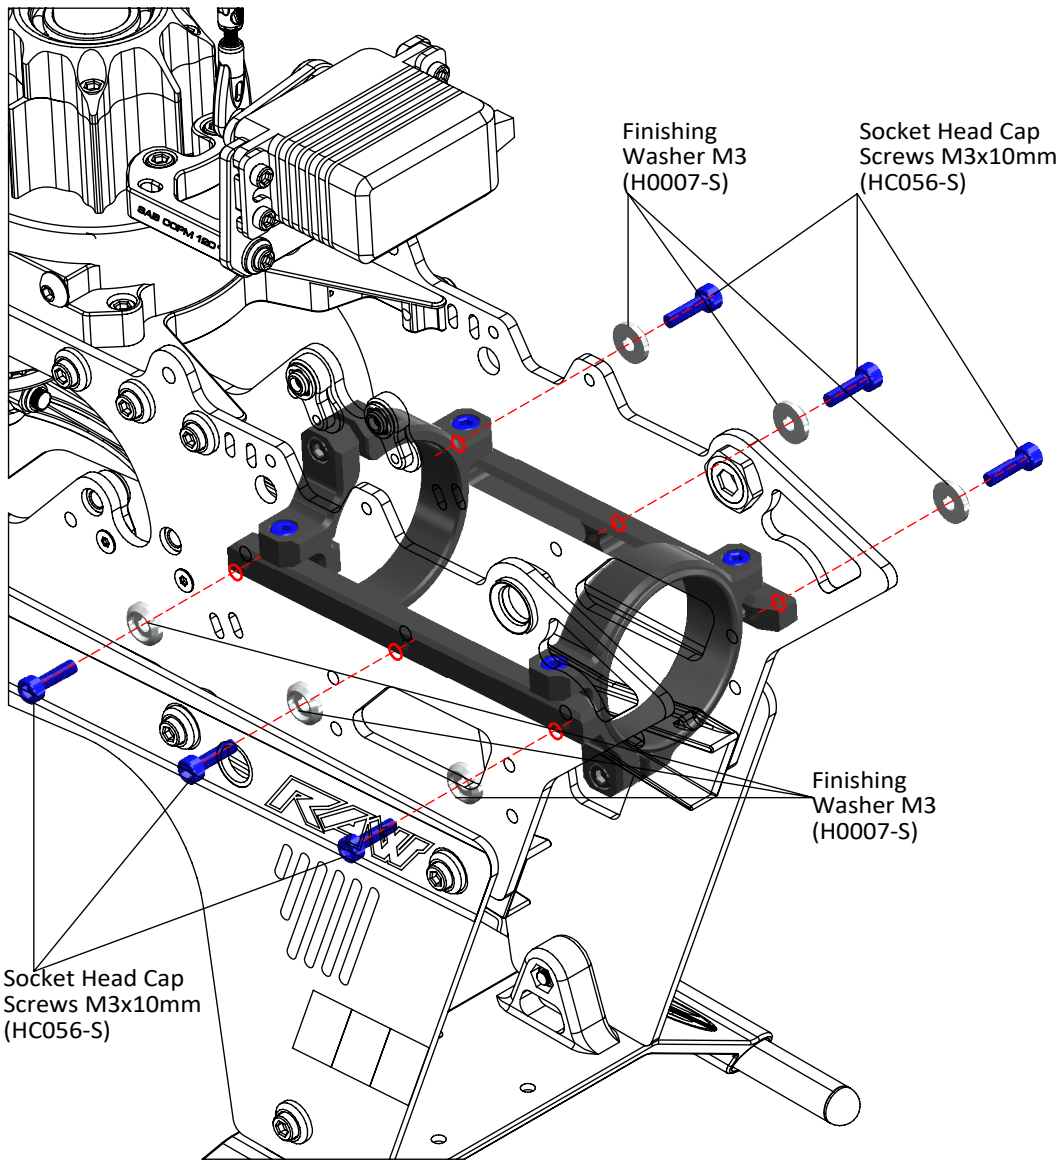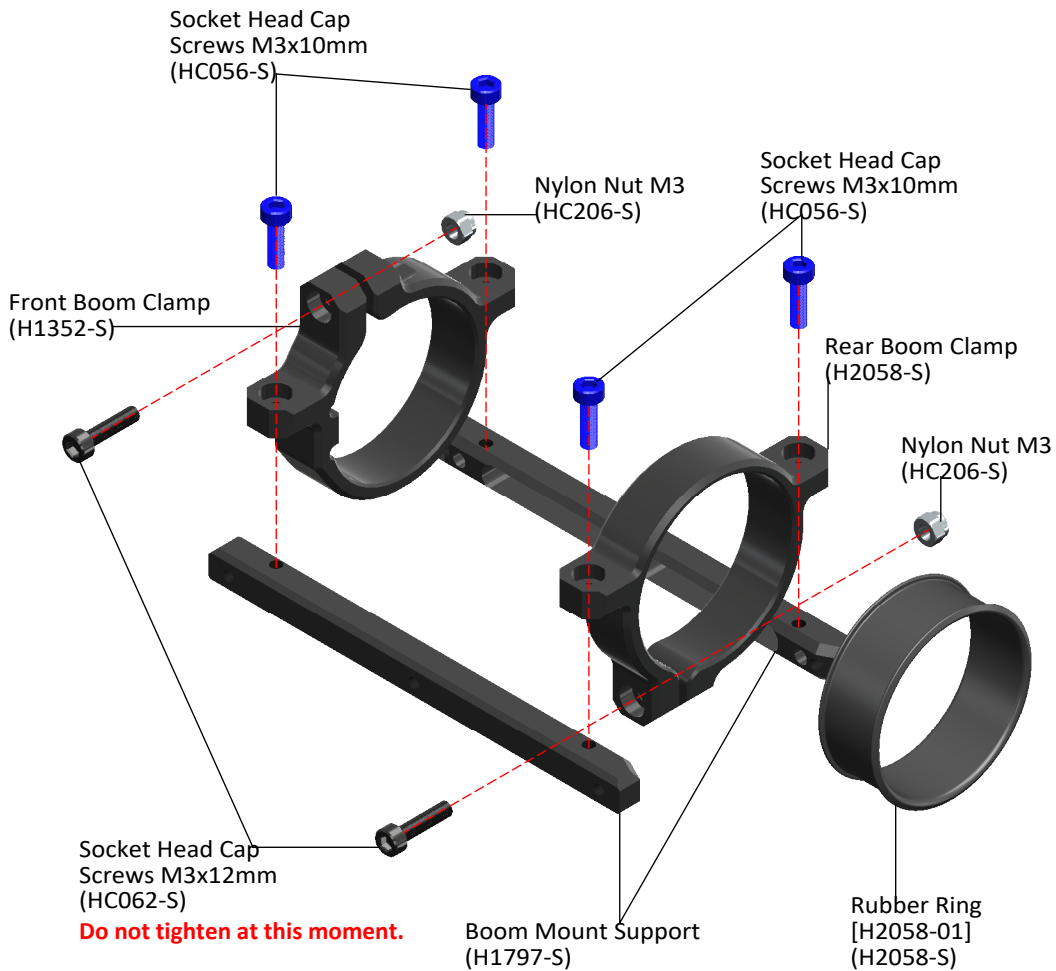

PUSH TENSIONER ASSEMBLY

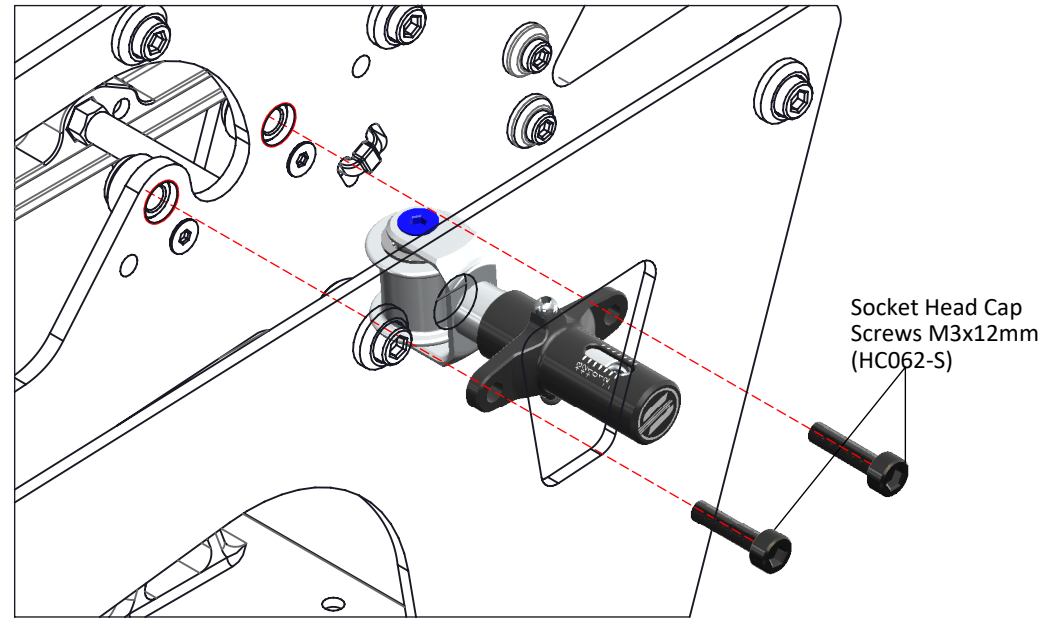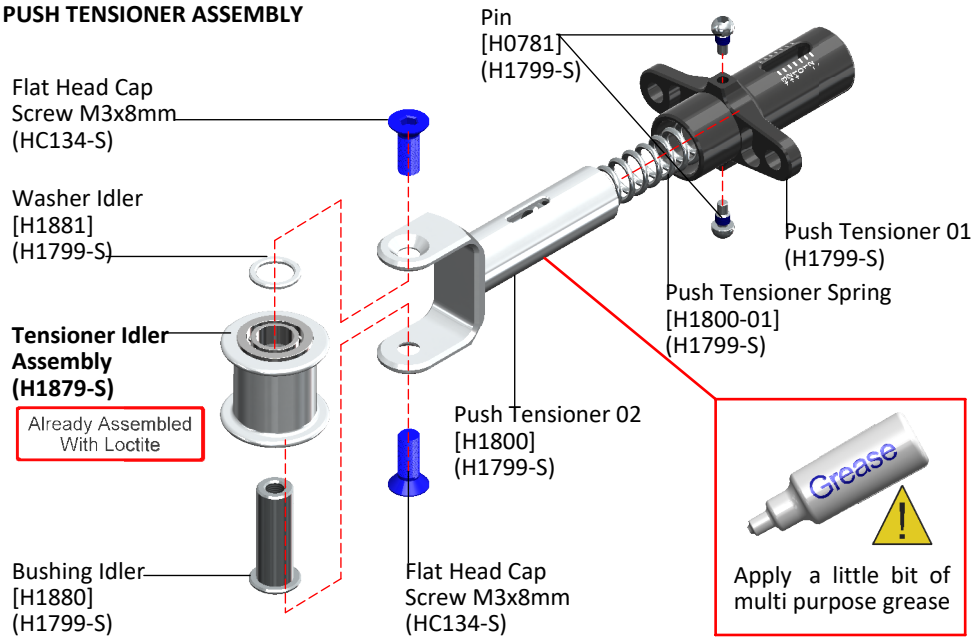

FIXED TENSIONER ASSEMBLY

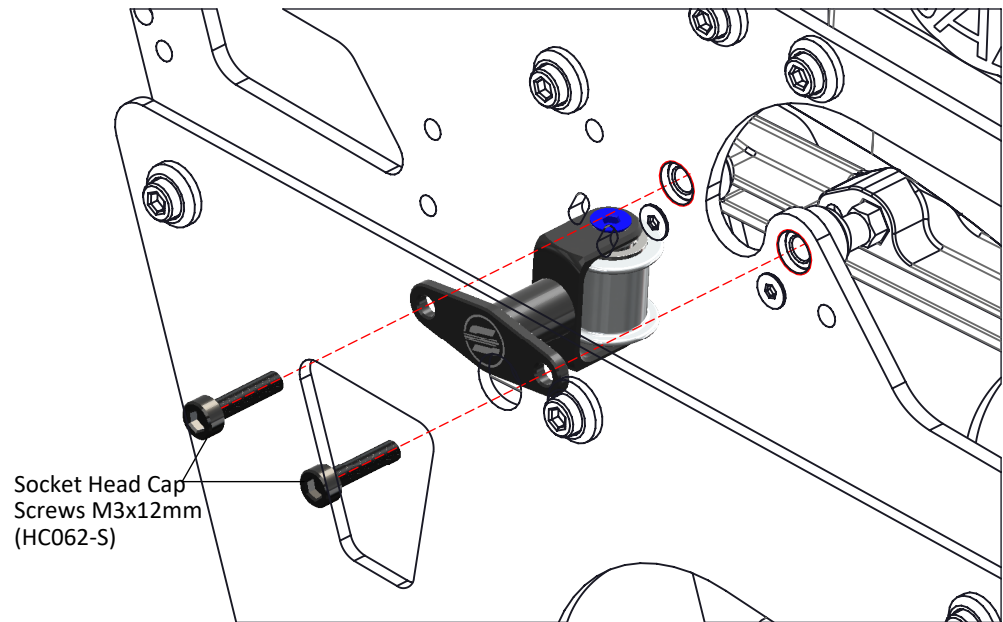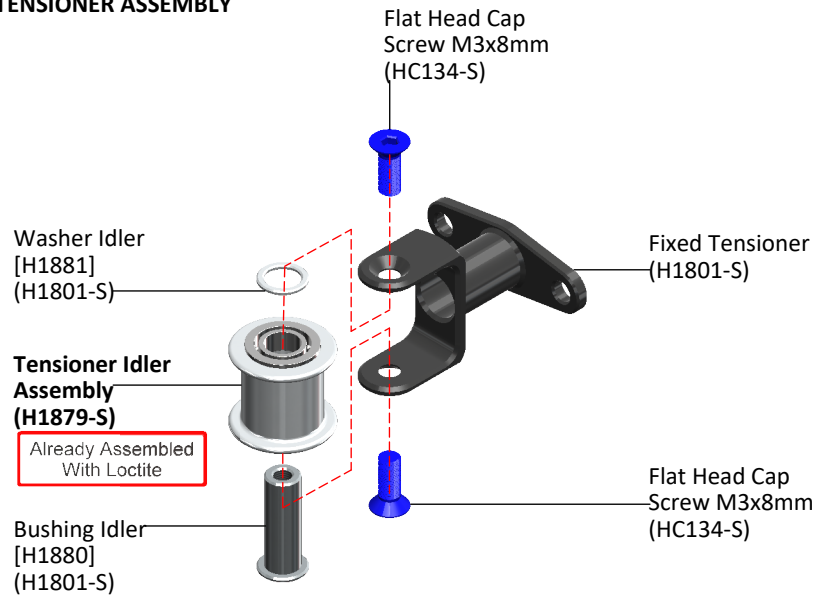




SE763


Raw
GOBLIN

TAIL BOOM ASSEMBLY

BOX 1, BAG FOR PAGE 27

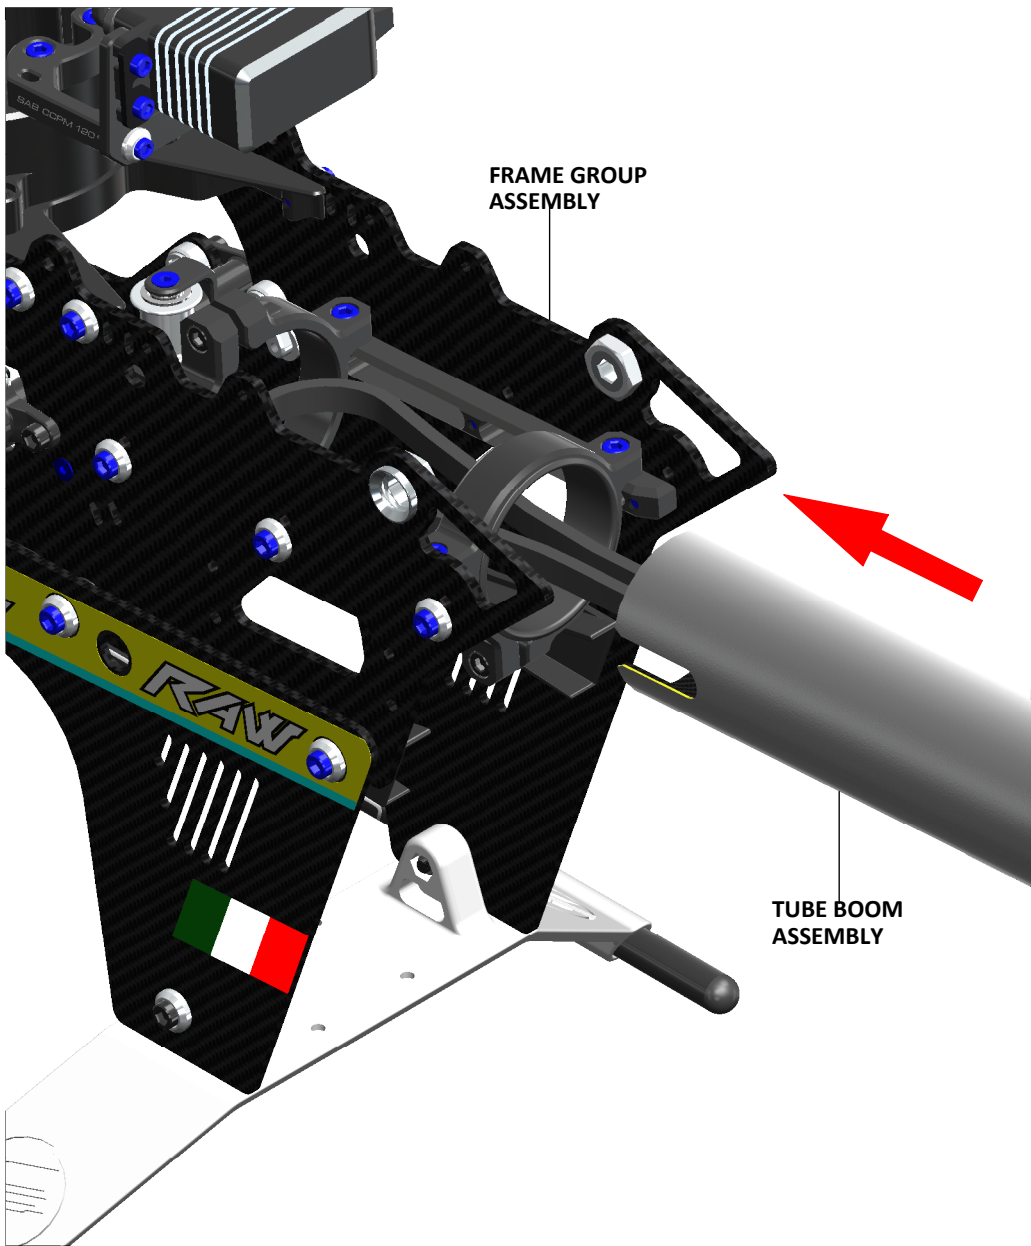

TOOL KIT ASSEMBLY

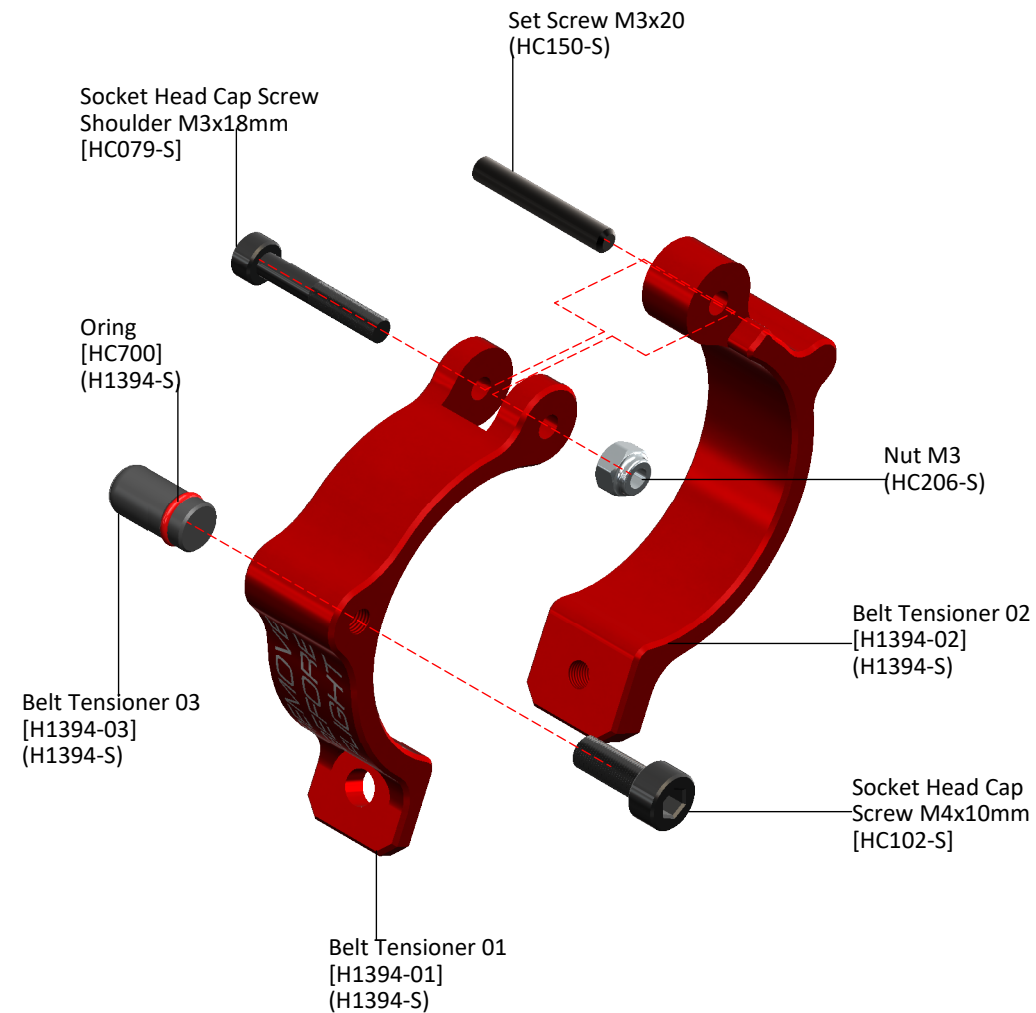



TAIL BOOM ASSEMBLY

To fit the tail belt, loosen the tail boom by loosening the 2 M3 screws (**Fig.1**).

- *Install the belt onto the tail front pulley, checking the direction of rotation.
- *Rotate the tail drive several times by hand.
- *Tension the tail belt by using the tool kit to slide the boom backwards. Then slowly tighten the two red screws.
- *The indicator on the tensioner needs to reach "Zero" (**Fig.2**).

How to use the tail belt tension tool:

1. Push the plastic pad into its seat by unscrewing the Orange M4x10 screw.
2. Install the tool on the boom, it needs to touch the H2058 clamp. The yellow M3 set screw can be used to make sure the tool is parallel to the boom clamp.
3. Tighten the Pink M4x10 screw to lock the tool onto the boom.
4. Turn the Orange M4x10 screw to tension the tail belt. This will push the boom back, thus tightening the tail belt.
5. Once the correct tension is achieved, tighten the two boom clamps with the two M3 screws.
6. Remove the tool before flight.

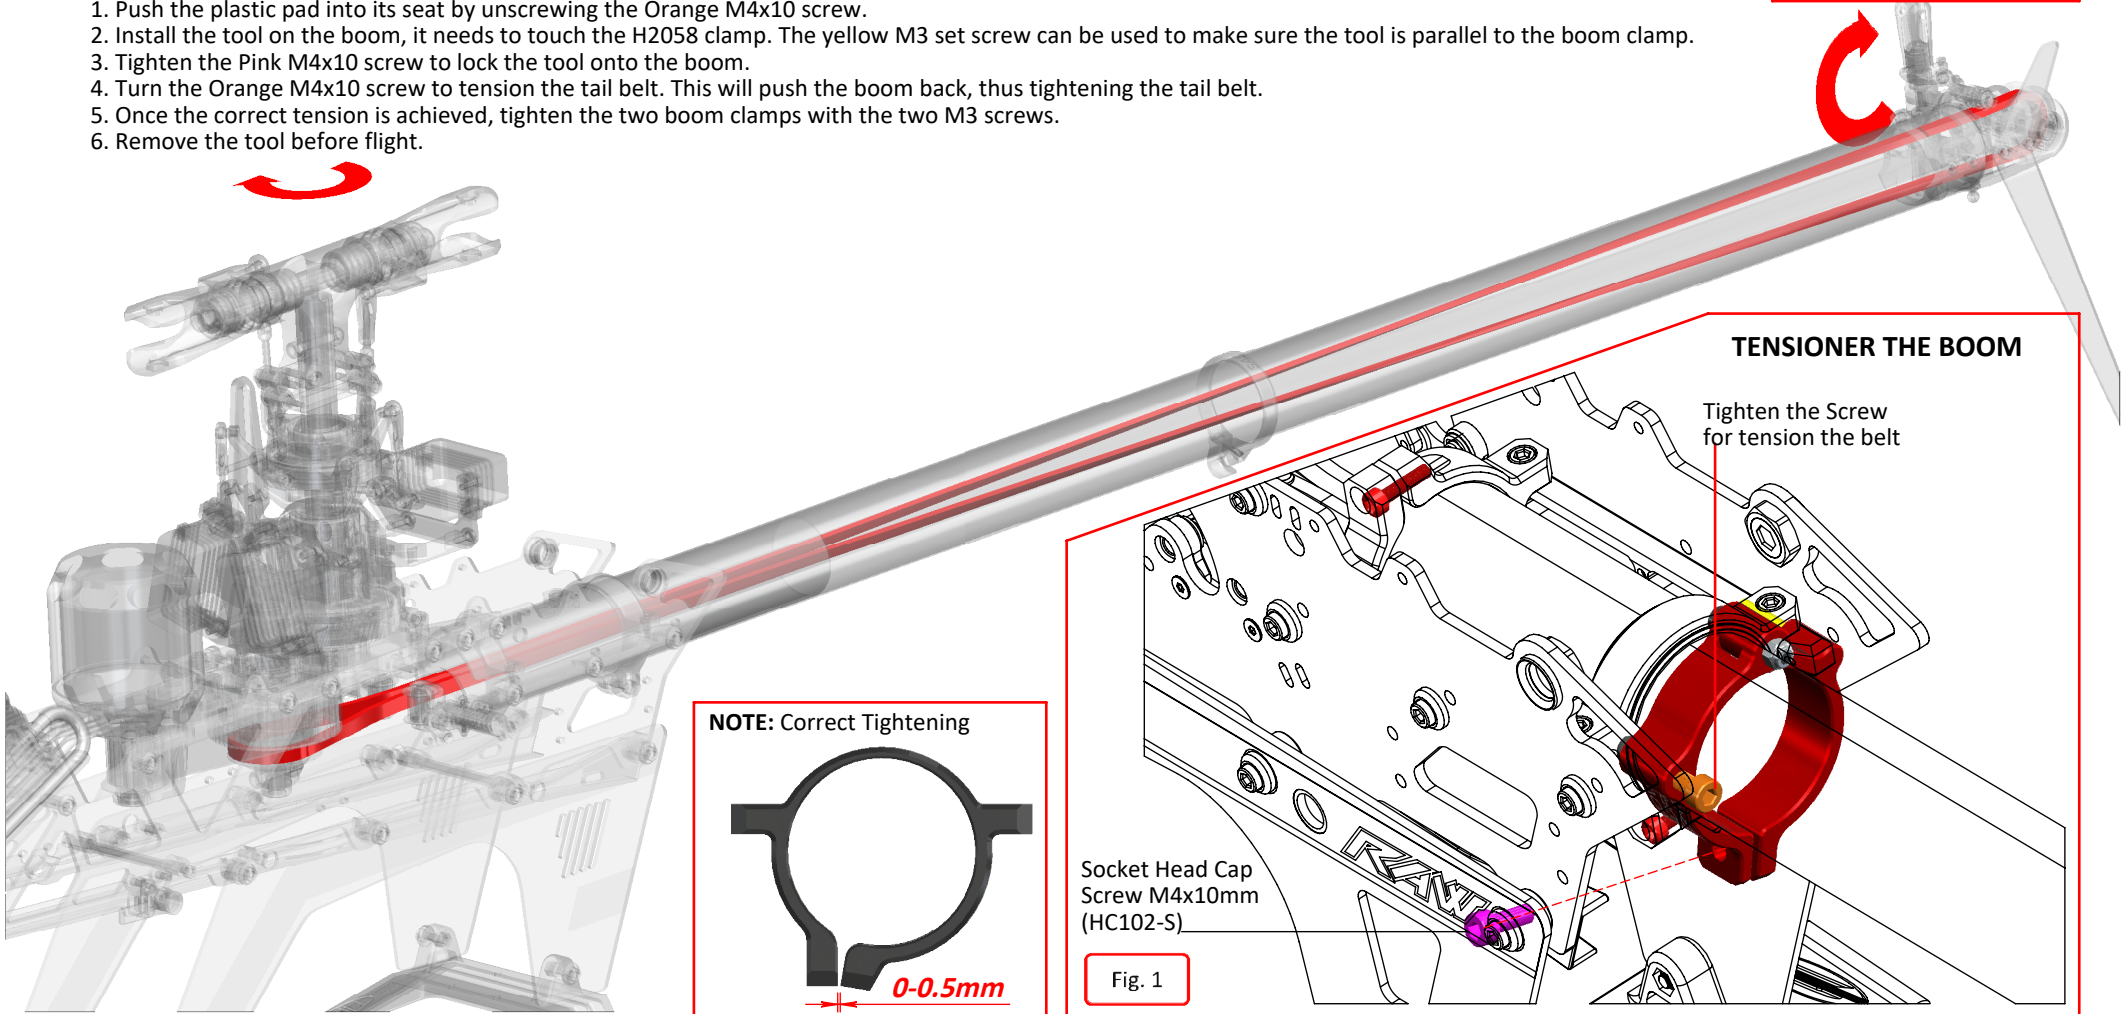





SB763

Raw
GOBLIN


TAIL BOOM ASSEMBLY

BOX 1, BAG FOR PAGE 29


TAIL SERVO ASSEMBLY

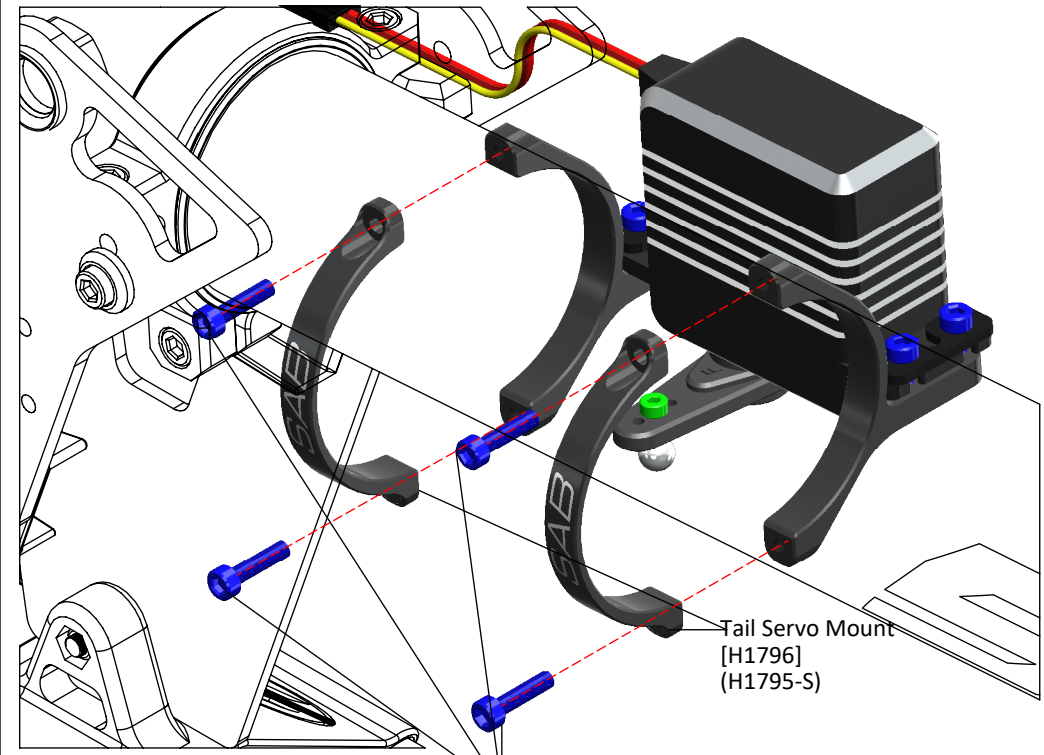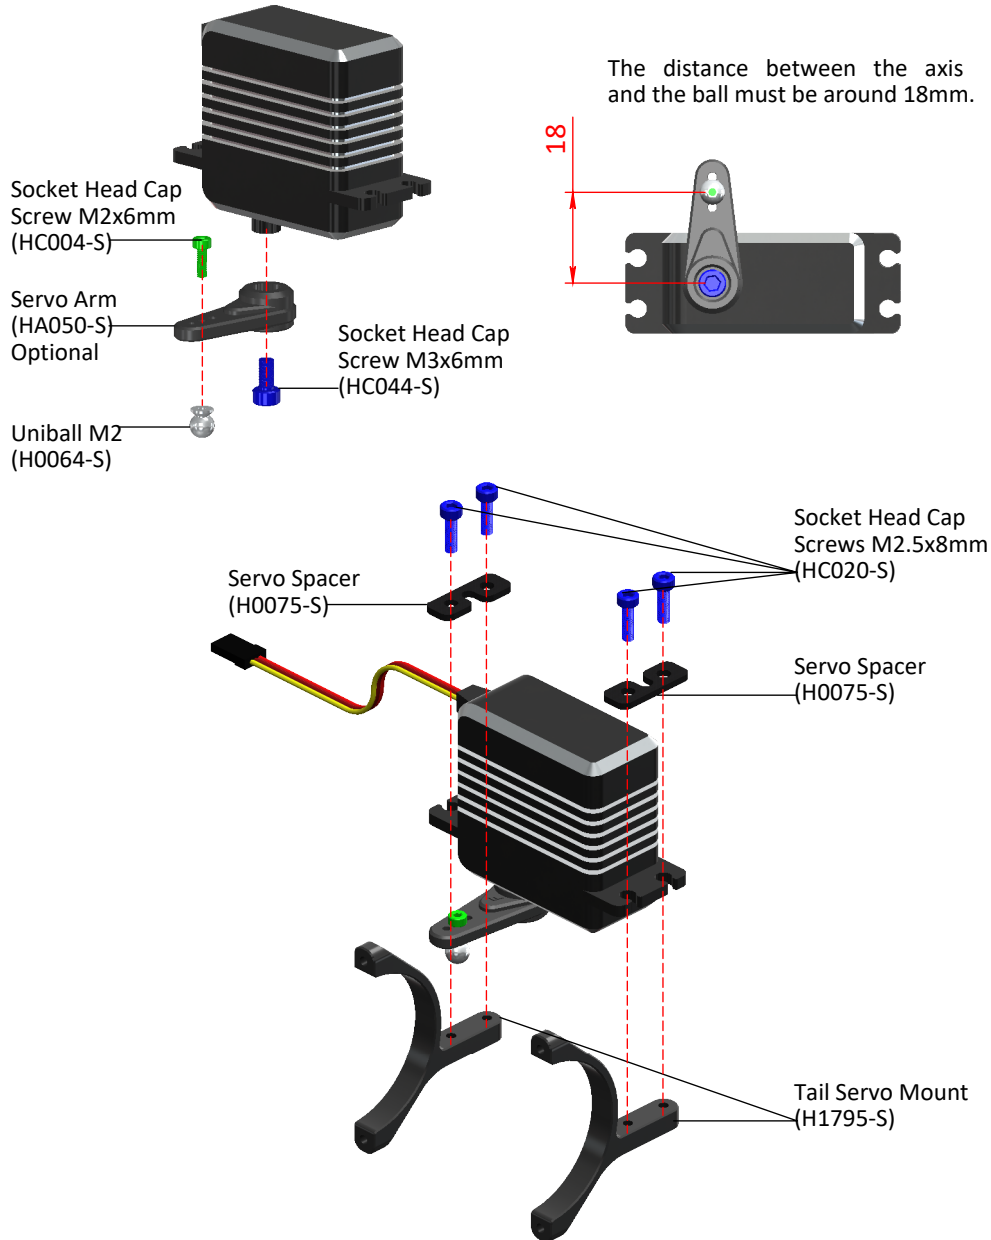

Note : Tighten carefully without over tightening to avoid damaging the boom.

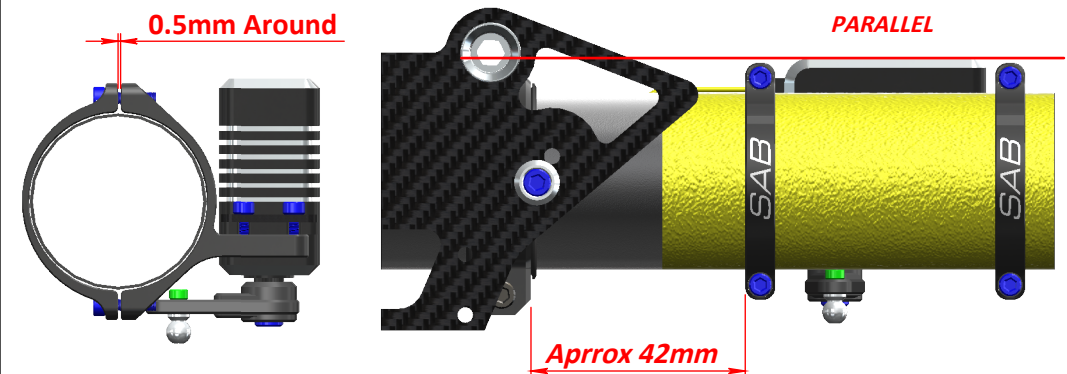

BOX 3, BAG FOR PAGE 30



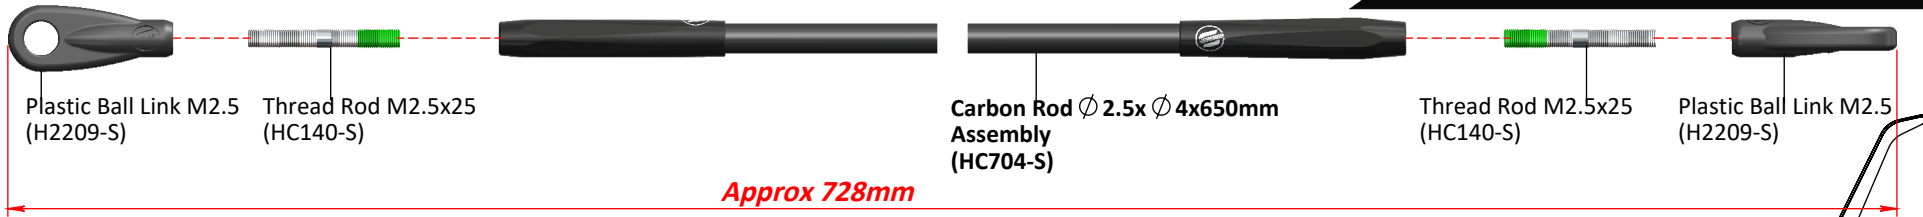


NOTE:

Before installing the plastic link onto the ball, be sure the tail push rod moves smoothly. You can open up H1197 if you need to.

NOTE:

The carbon rod is slightly bent, generating a little preload against the carbon rod support.

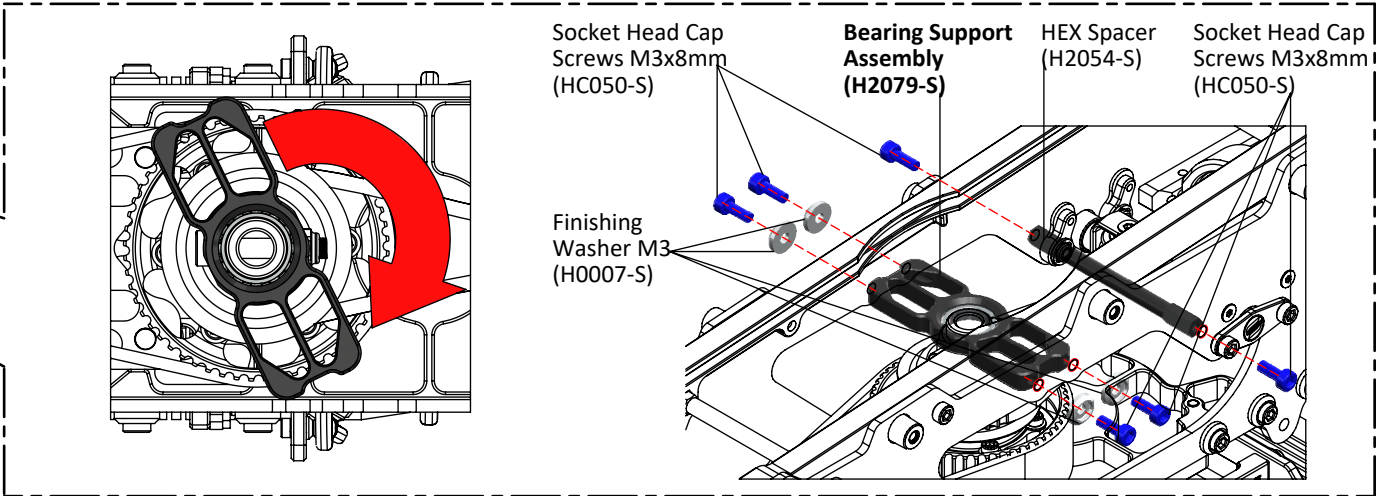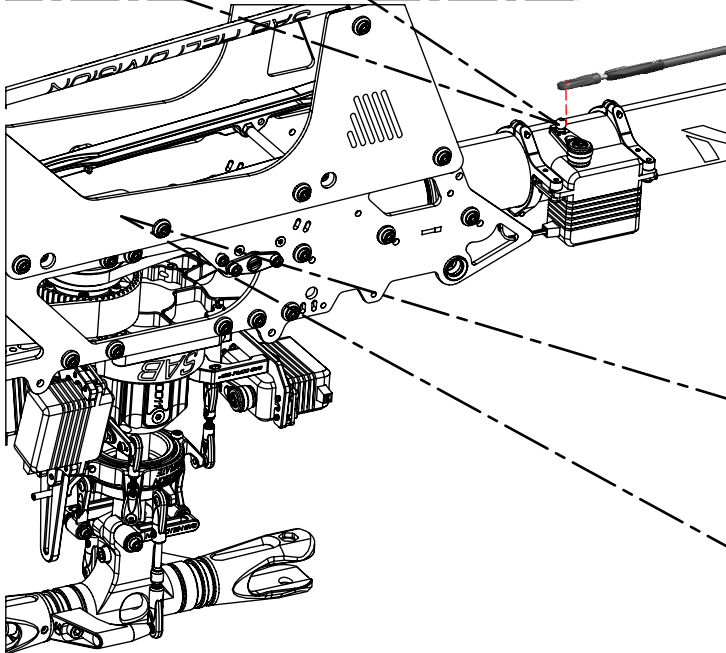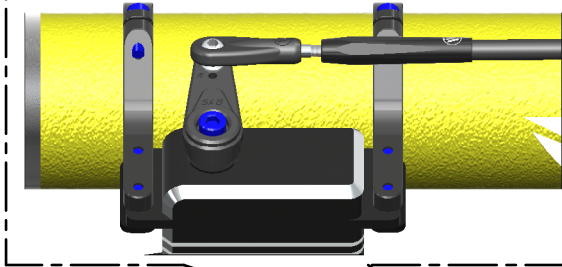




SB763

Raw
GOBLIN


BOX 1, BAG FOR PAGE 31


FBL/RX PLATE ASSEMBLY

NOTE: 2mm thick tape for the gyro is recommended.

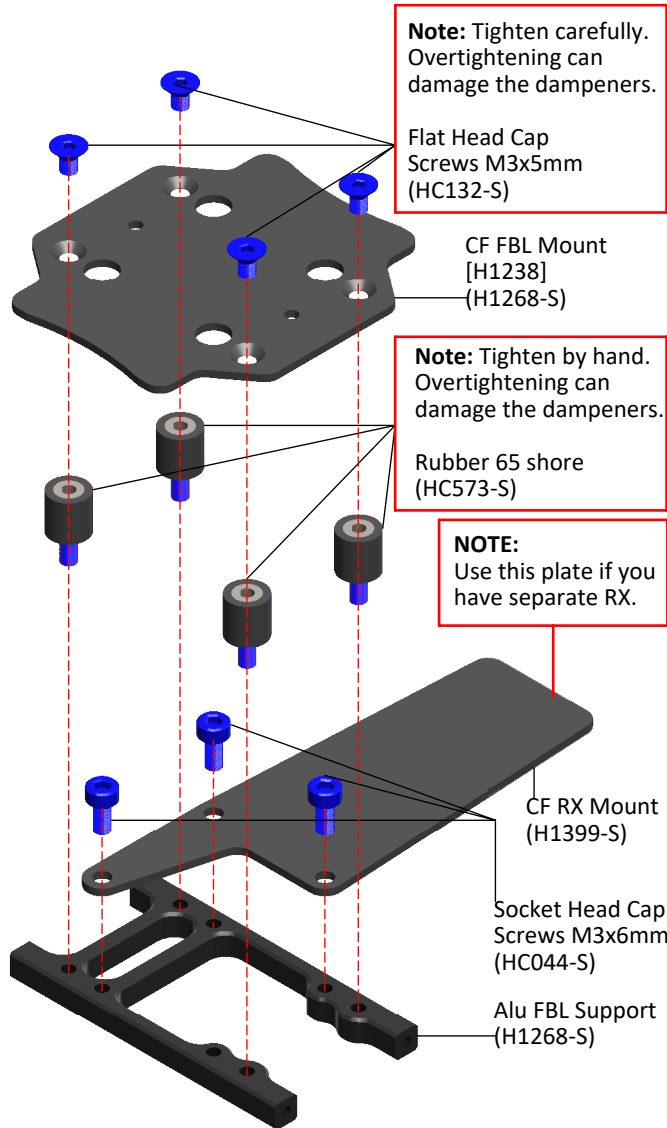

If you do not want to use the dampeners, you can setup a rigid FBL mount support using the screws and bushings contained in bag 31-2

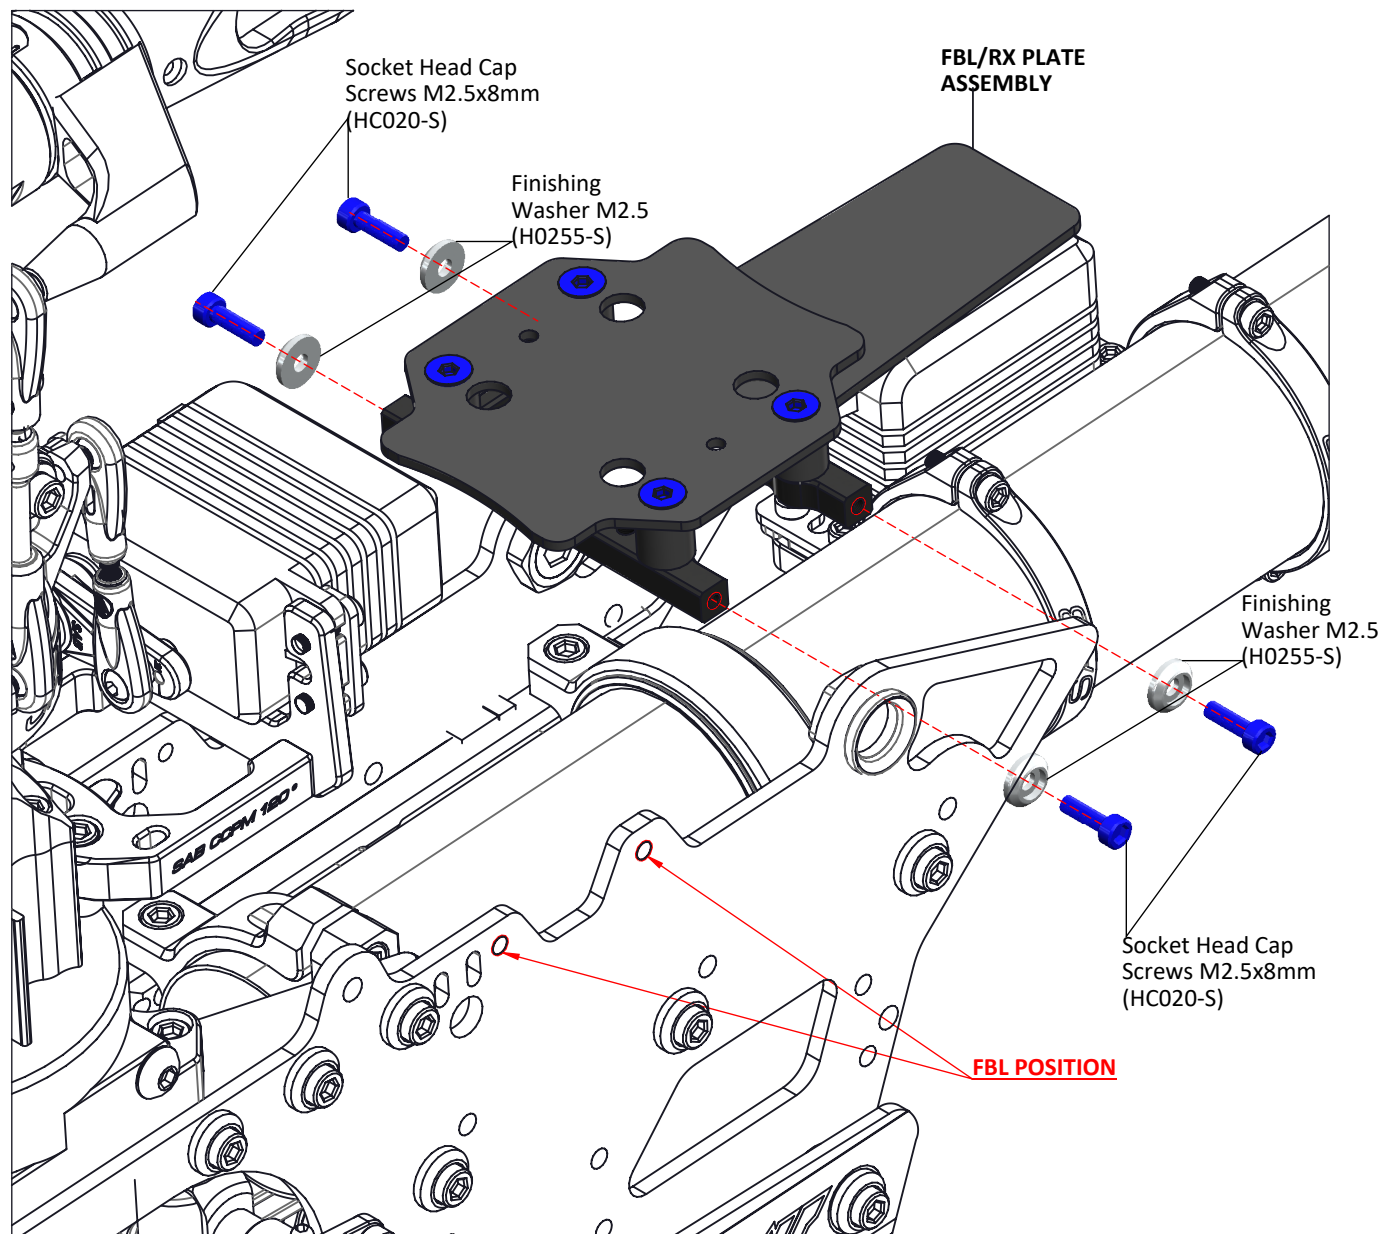

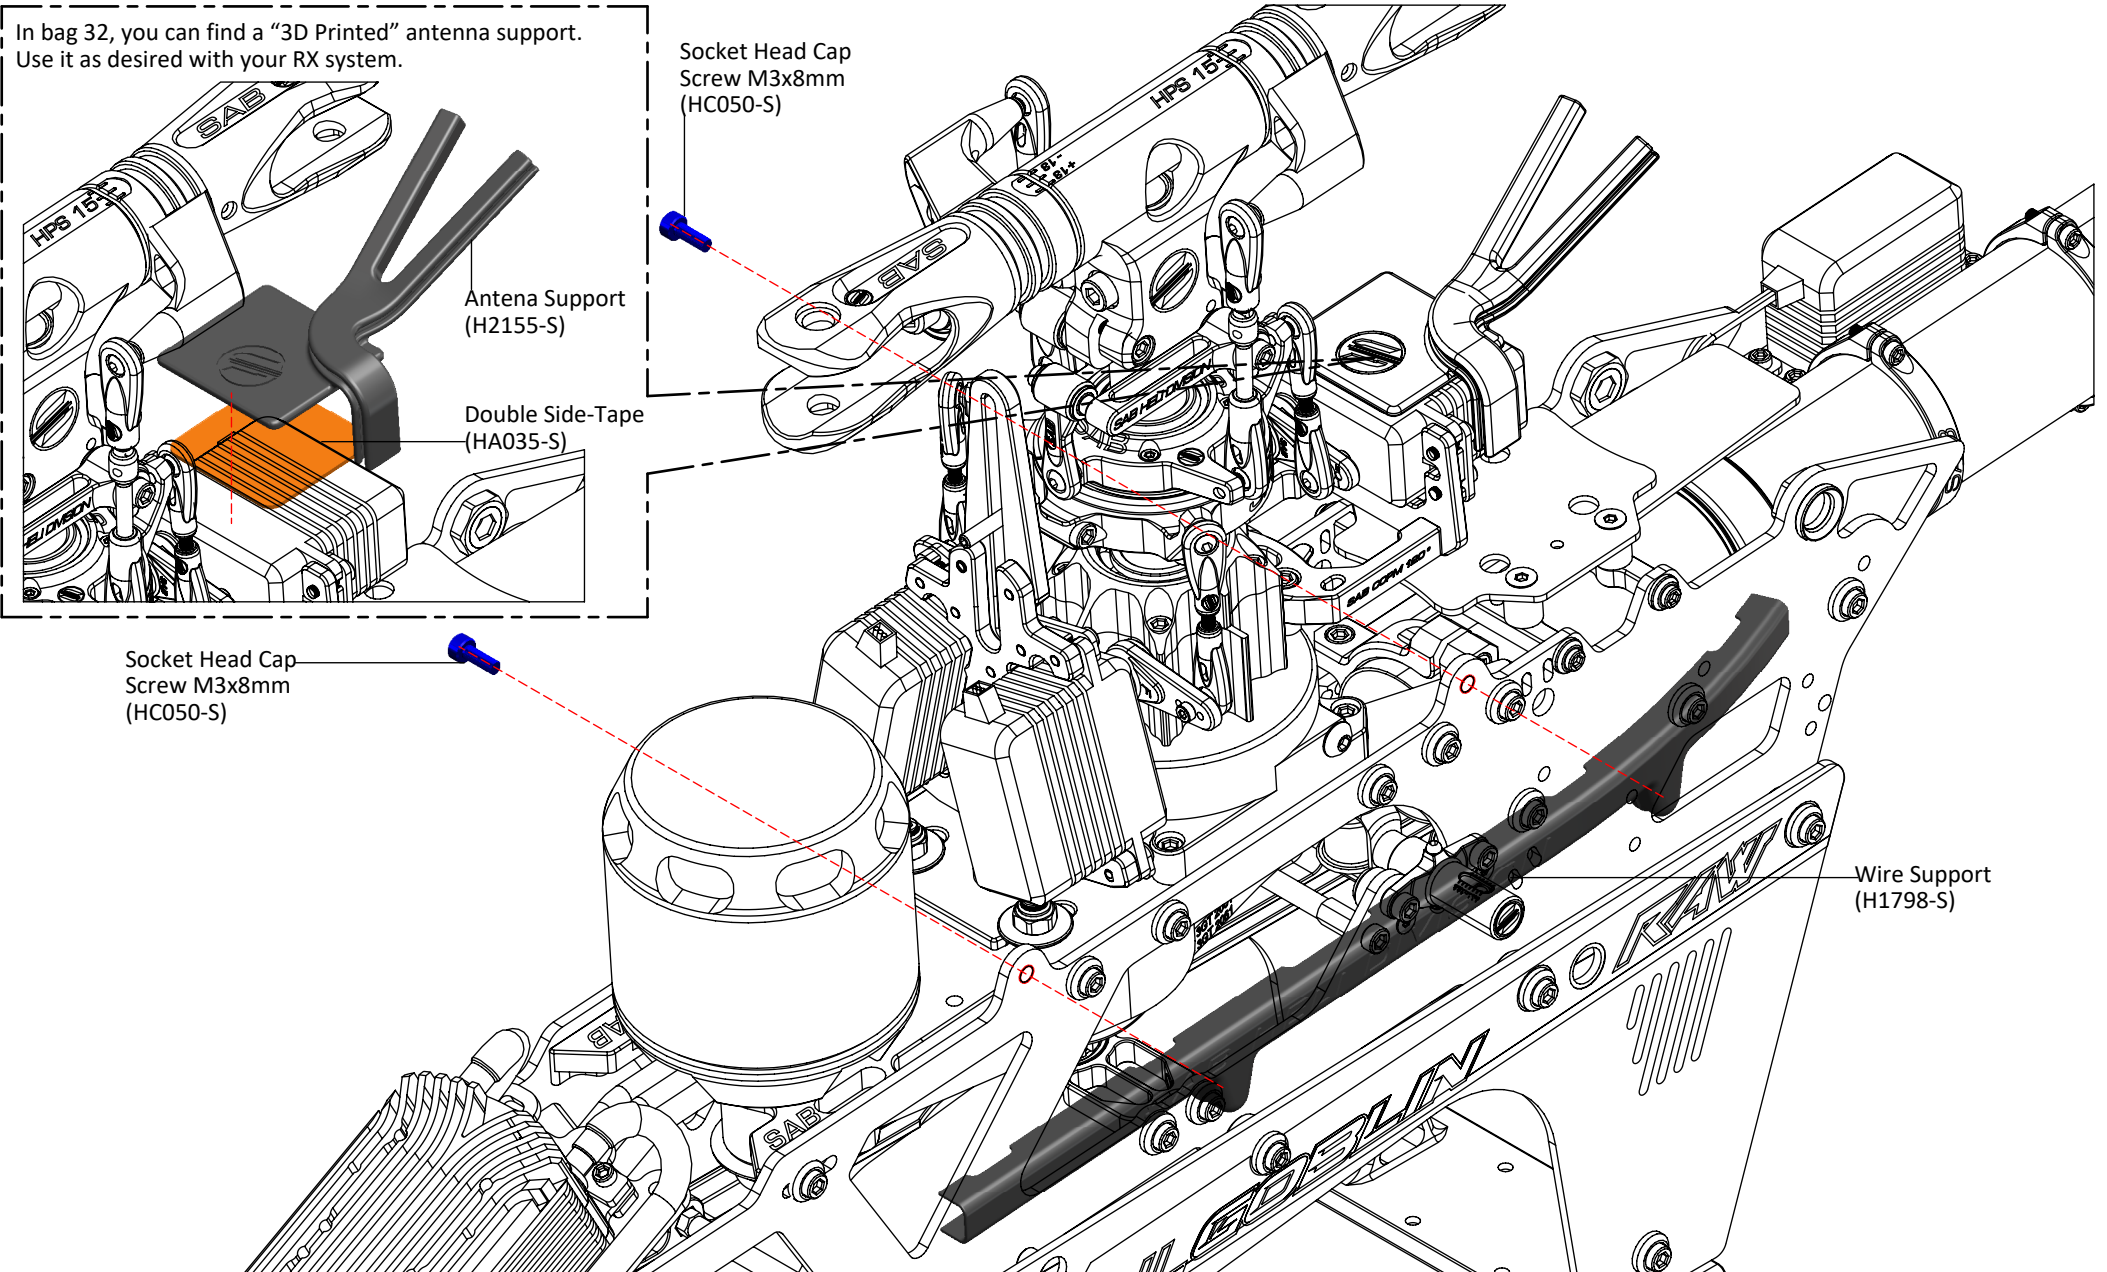




SE763

Raw
GOBLIN


INSTALLATION FBL/RX

BOX 1, BAG FOR PAGE 33

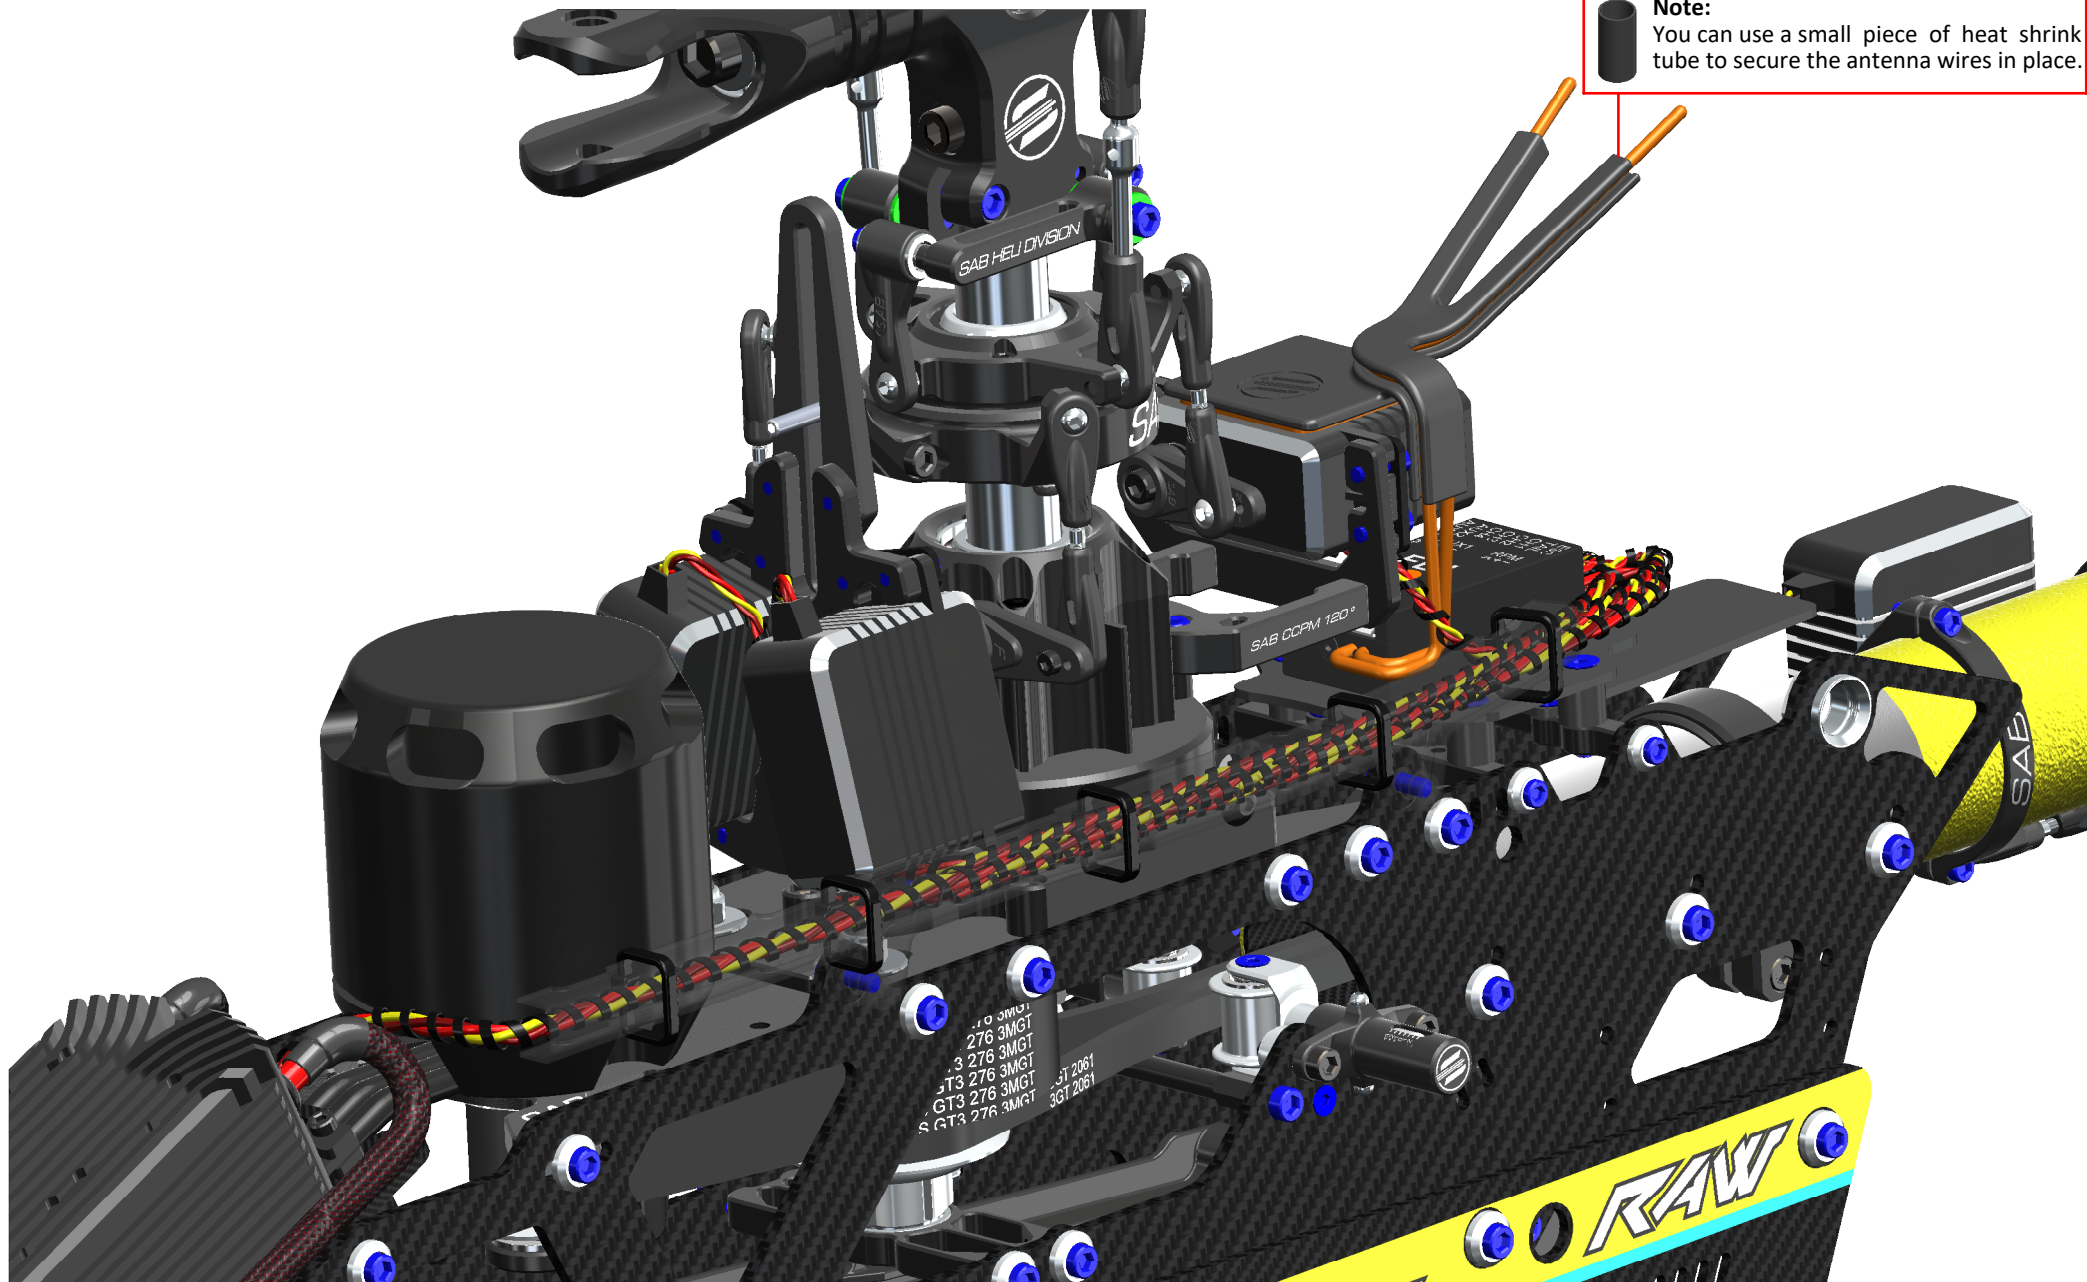

Note:
You can use a small piece of heat shrink tube to secure the antenna wires in place.

BATTERY ASSEMBLY

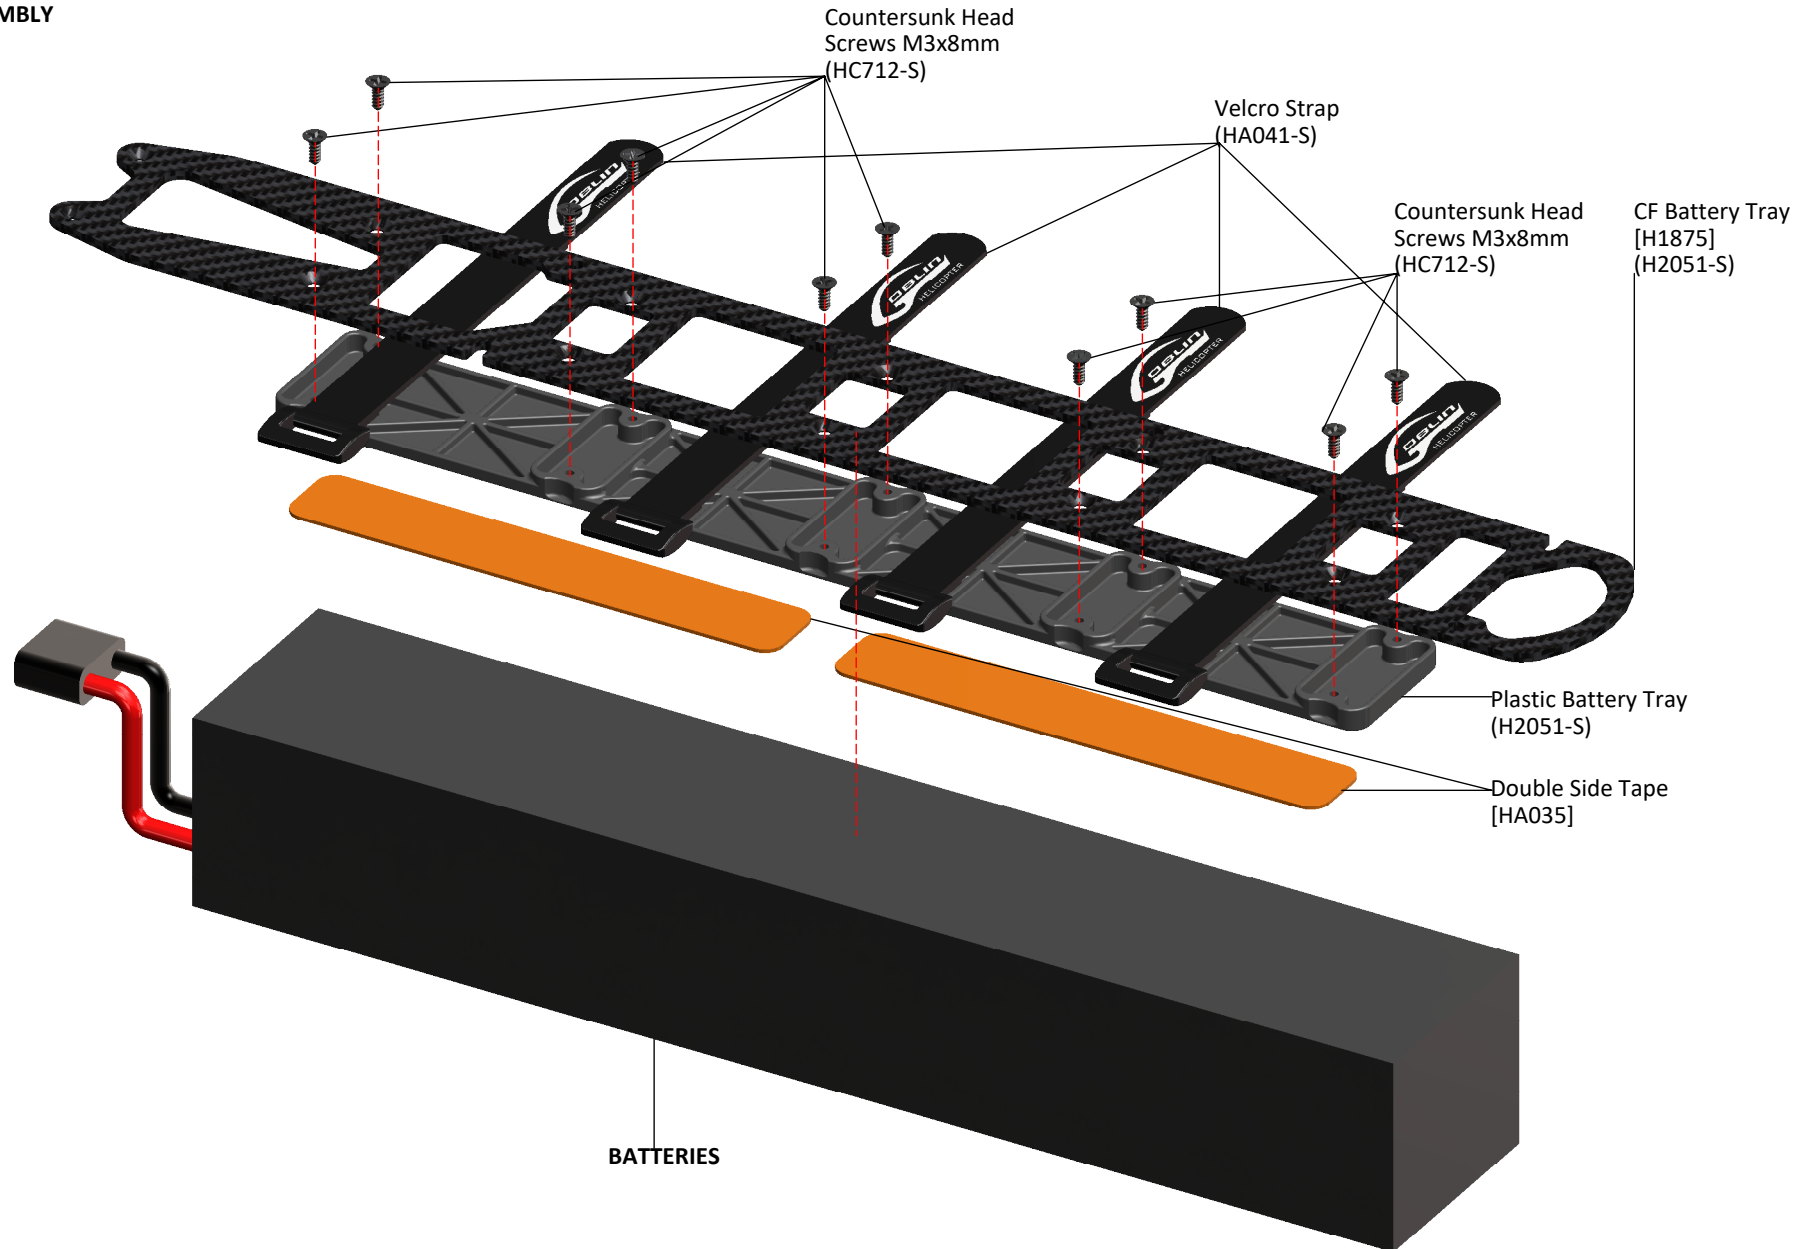





SE763

Raw
GOBLIN

INSTALLATION BATTERY



Before permanently mounting the batteries onto the battery tray, check the ideal position for the best center of gravity.

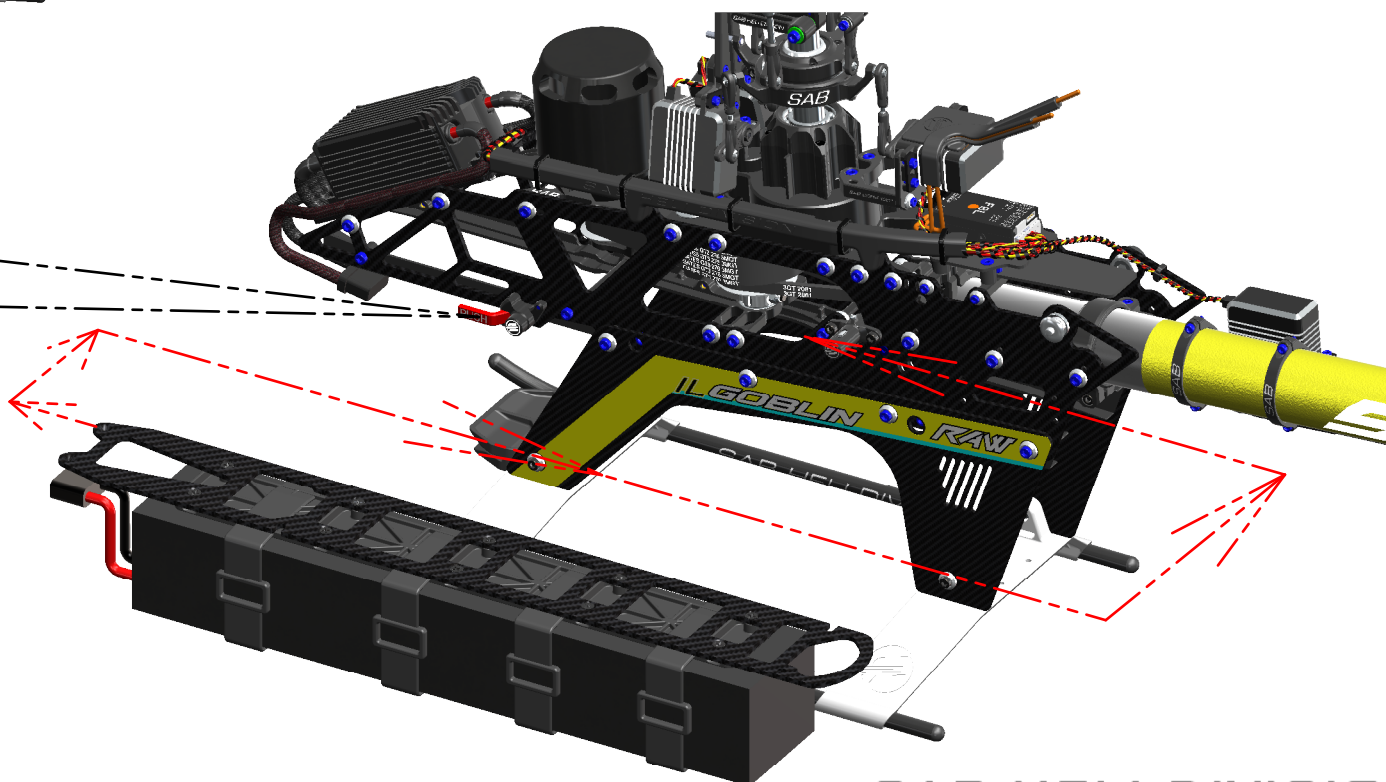
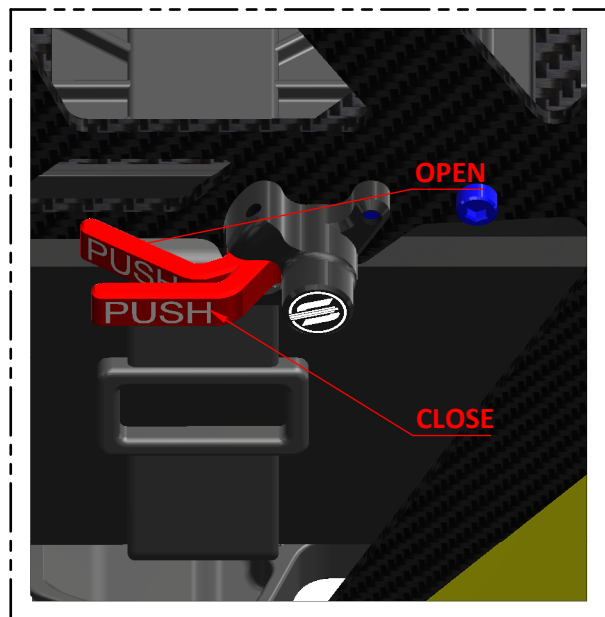


CANOPY


*Install Canopy grommets (Figure.1) and the two quick knobs (Figure.2).

*Fit the canopy in the red arrow zone, and insert the knobs.

***Confirm the canopy is secure prior to each flight.**

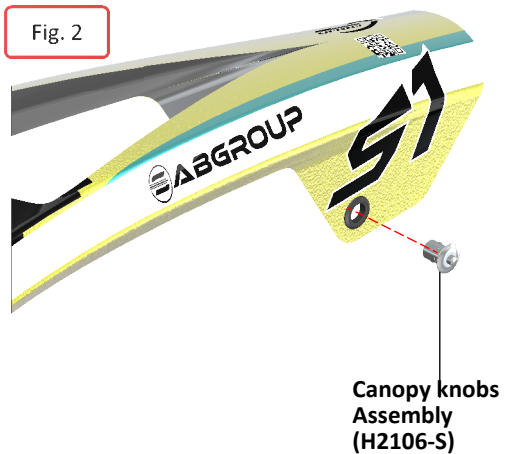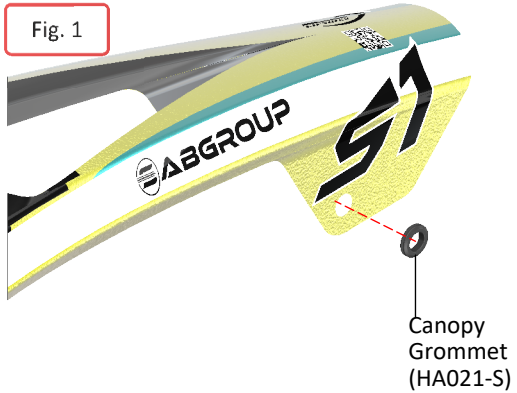


NOTE:
Put a very small drop of CA glue on the grommet and then insert the quick release canopy mount. This way when you remove the canopy, the mounts can not come off. Be careful not to block the quick release mechanism with glue.

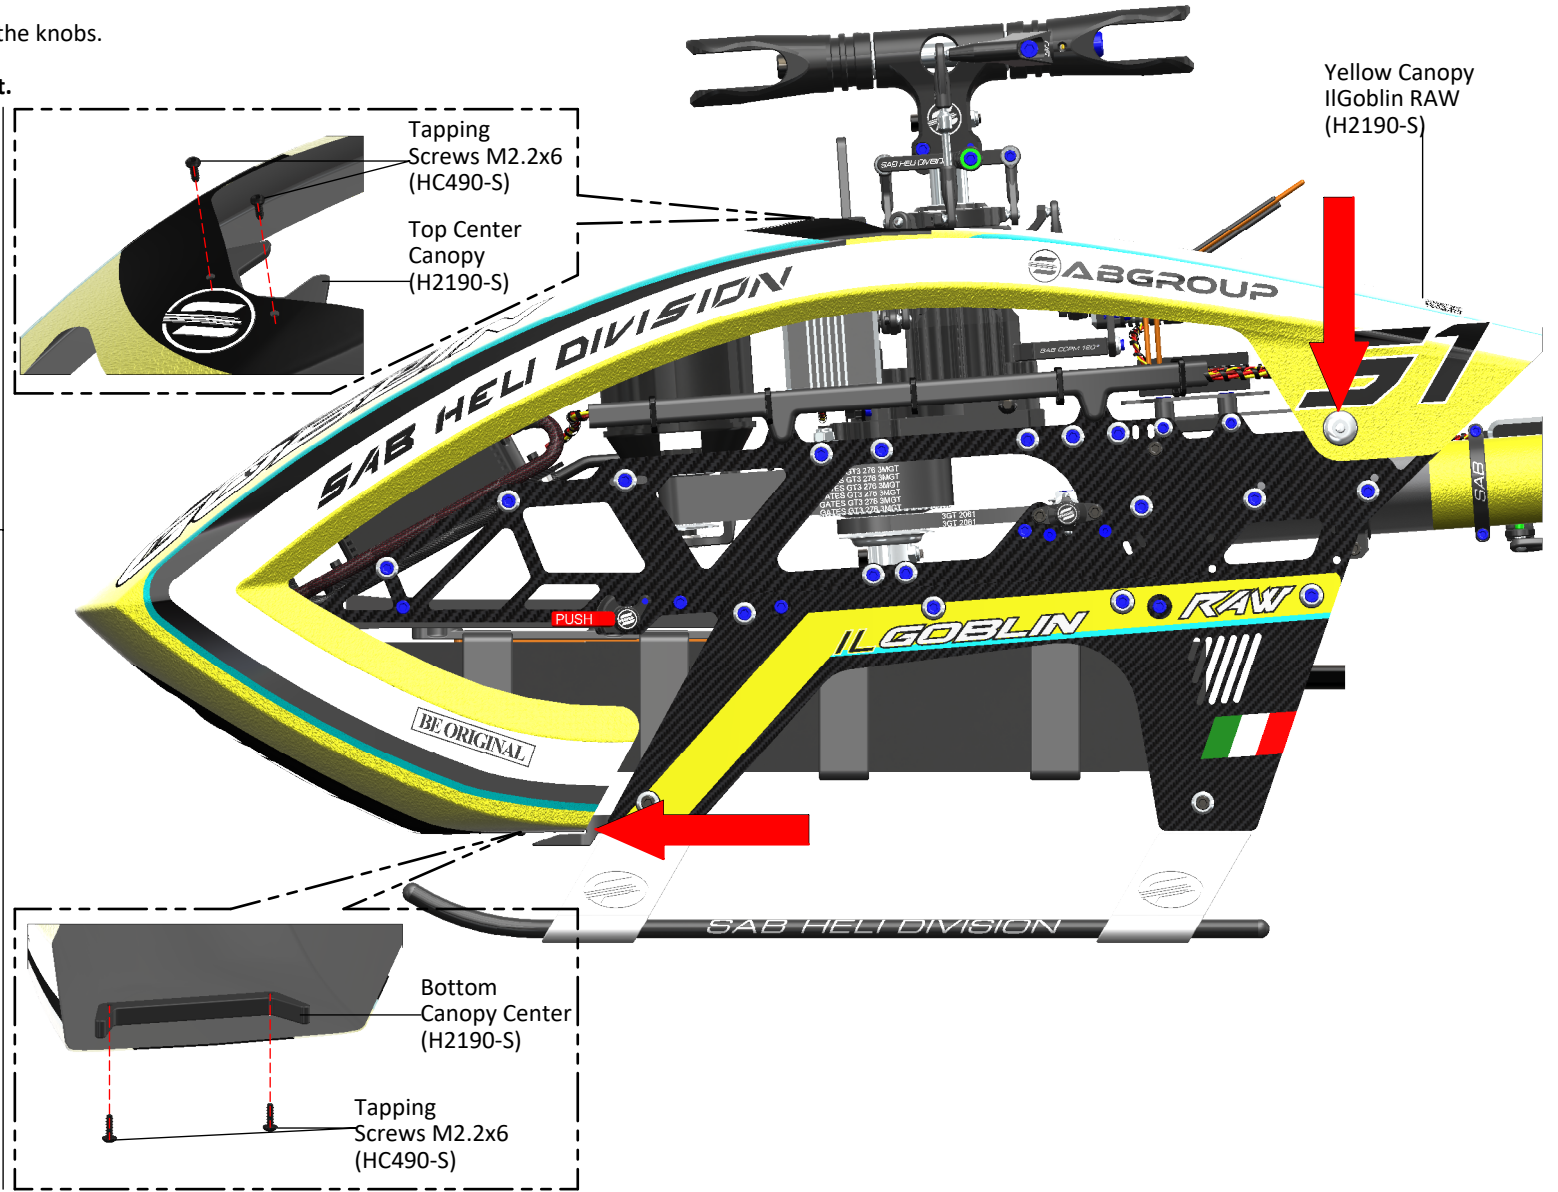



BOX 1, BAG FOR PAGE 37

OPERATIONS BEFORE FLIGHT

- *Set up the remote control and the flybarless system with utmost care.
- *It is advisable to test the correct settings of the remote and flybarless system without main blades or tail blades fitted.
- *Check that all wiring is isolated from the carbon/aluminum parts. It is good practice to protect them at the points where they are at most risk.
- *Be sure of the gear ratio, verifying carefully the motor pulley in use. The forces acting on the mechanics increase enormously with increasing of rpm. Although the Goblin can fly at high rpm, for safety reasons we suggest to not exceed 2200rpm.
- *Fit the main blades and tail blades. **(Figure.1 and Figure.2)**
- *Please make sure the main blades are tight on the blade grips, you should be able to violently jerk the head in both directions and the blades should not fold. Failure to tighten the blades properly can result in a boom strike. To fold the blades for storage, it is advisable to loosen them.
- *Check the collective and cyclic pitch. For 3D flight, set about +/-13°.
- *It is important to check the correct tracking of the main blades.
On the Goblin, in order to correct the tracking, adjust the main link rod. This is provided with a right/left thread system that allows continuous fine adjustments of the length of the control rod; for this adjustment it is not necessary to detach the ball link.
- *Confirm the canopy is secure prior to each flight.
- * Make sure that the battery locking pin is back in its resting position, blocking in correct way the battery tray.
- *Perform the first flight at a low headspeed, 1800 RPM. 

After this first flight, do a general check of the helicopter. Verify that all screws are correctly tightened.

IN FLIGHT

ABOUT HEAD

The HPS head allows for a very broad range of dampening setups. The dampers are composed of 3 O-ring (that defines the rigidity) and a technopolymer damper (that defines the maximum possible movement of the spindle). Using different Oring and dampers you can get different responses of the model.

O-ring

- 80 Shore: Soft for smooth response
- 90 Shore: Firm for direct and precise response

Damper

- A = Max movement of the spindle, feeling more elastic.
- B = Medium.
- C = Min movement of the spindle, feeling more direct.

The kit includes B damper H1046-B with 90 Shore O-ring [other Setting >>p/n H1135-S, HC530-S].

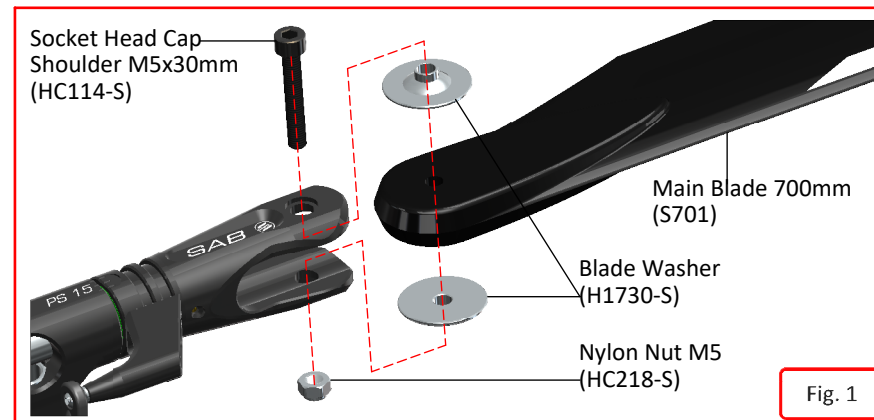


Fig. 1

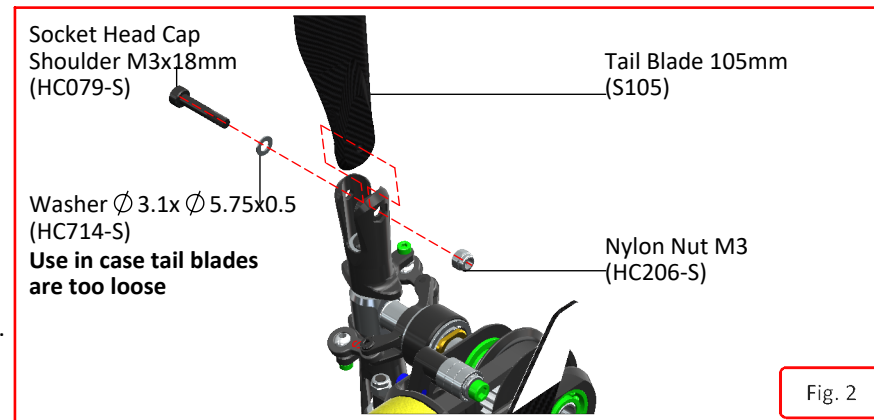


Fig. 2

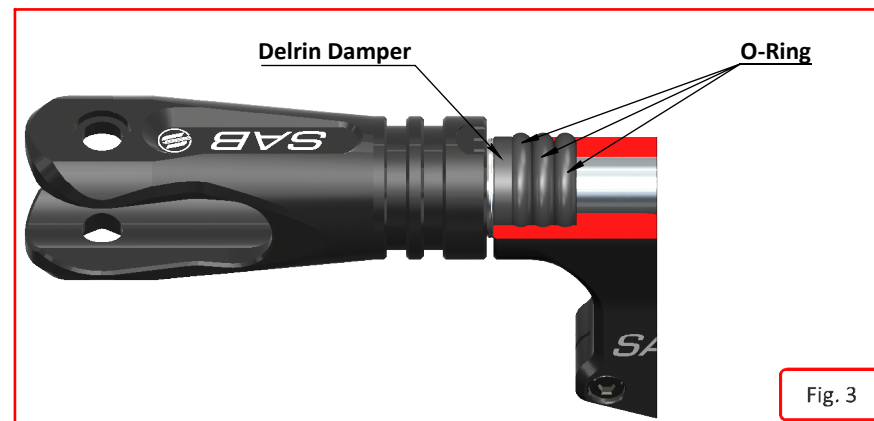


Fig. 3

MAINTENANCE

Take a look at the red parts.

Check them frequently. All other parts are not particularly subject to wear.


The lifespan of these components varies according to the type of flying.

On average it is recommended to check these parts every 20 flights. In some instances, based on wear, these parts should be replaced every 100 flights.

Periodically lubricate the tail slider movement and its linkages as well as the swash plate movement and its linkages.

To ensure safety you should do a general inspection of the helicopter after each flight. You should check:

- Proper belt tension (motor belt and tail belt).
- Proper isolation of the wires from the carbon and aluminum parts.
- All screws and bolts remain tight.

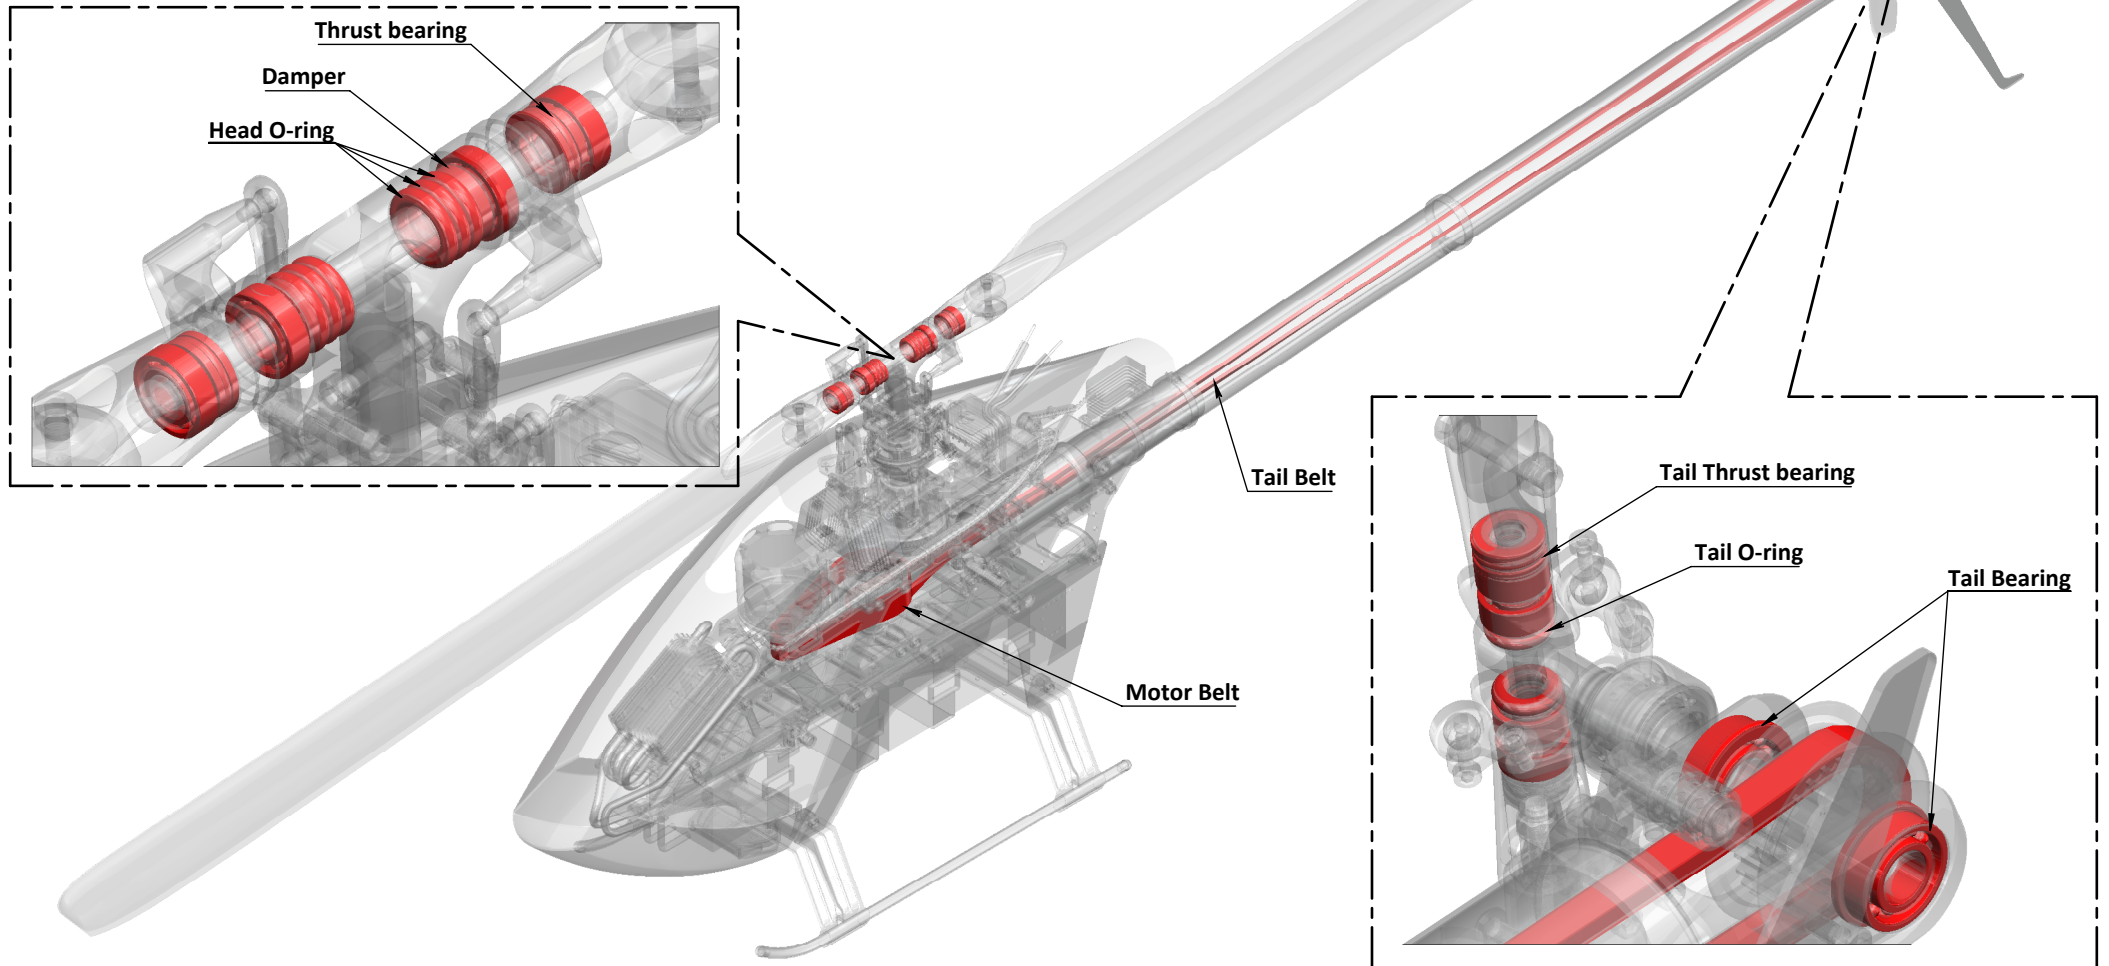




TRANSMISSION MODULE

The transmission module is supplied assembled and verified, ready to be used.

Explode and Spare Parts

NOTE:


Before opening the transmission module, use heat to break down the loctite. (example use a gas torch)

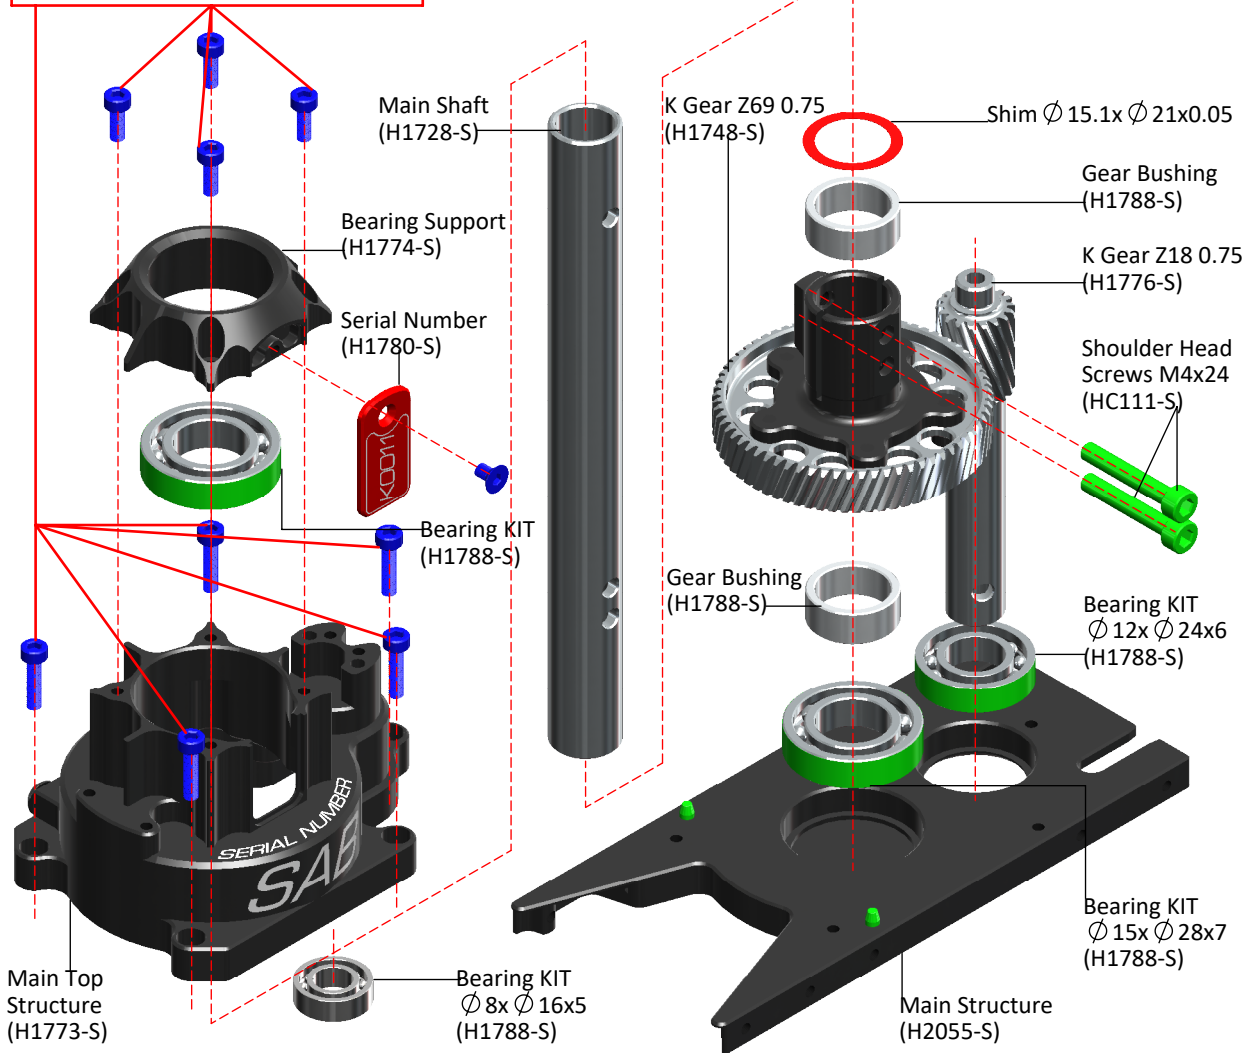


MAIN SHAFT REPLACEMENT

For replacing the main shaft:


- *Remove the serial number plate.
- *Remove the two M4x24 screw.
- *Remove and replace the main shaft.
- *Screw in the two M4x24 screw, with high force and using green loctite.

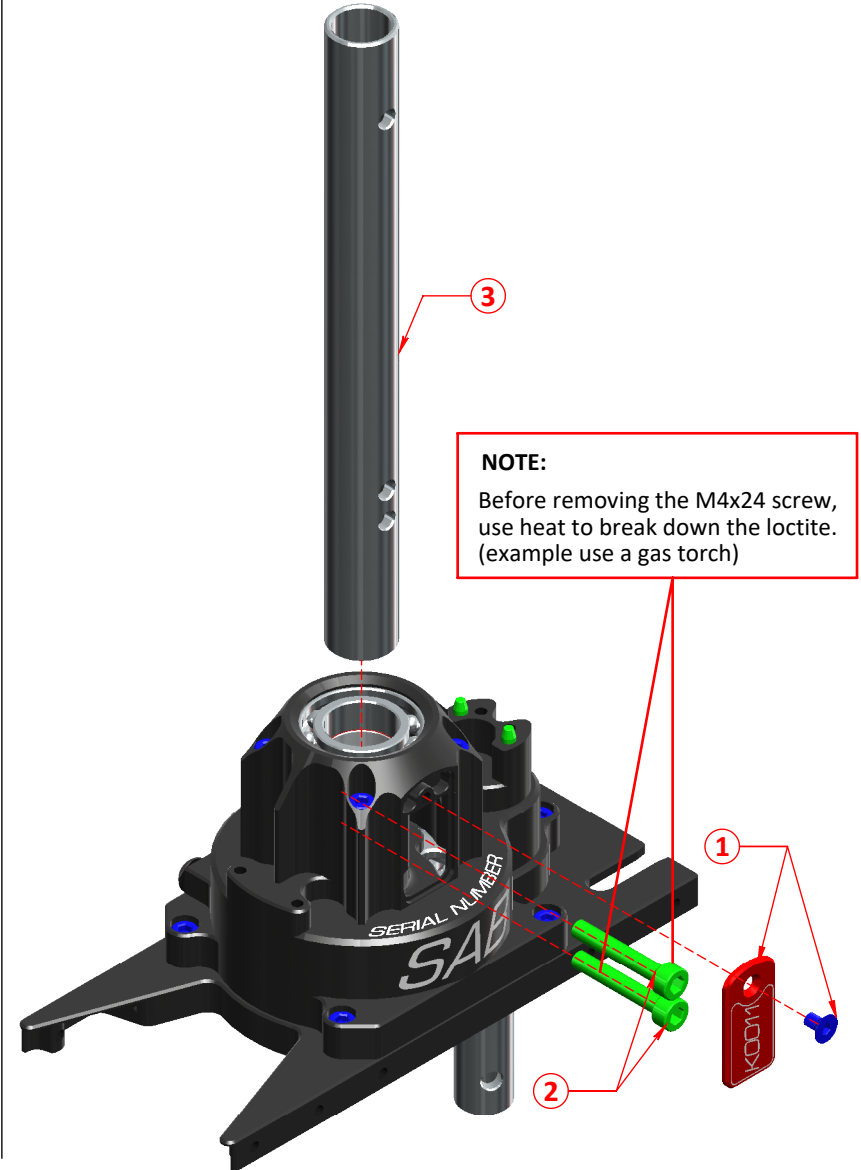


1 Check the dampening on the main and tail rotor to be the same as always.

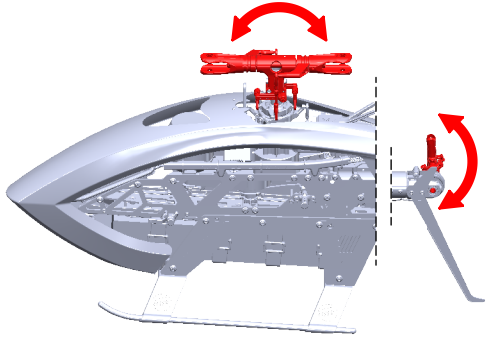


2 Tighten the main blades before flight.

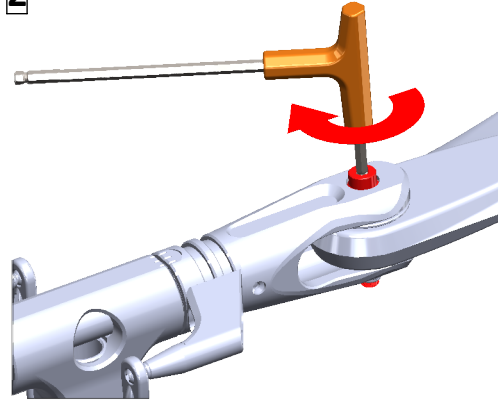


3 Check main hub screws (M4 and 2 M3) Ensure they are tight.

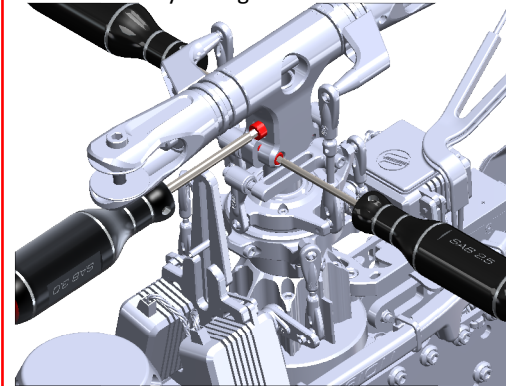


4 Check all power connectors (Good mechanical connection).

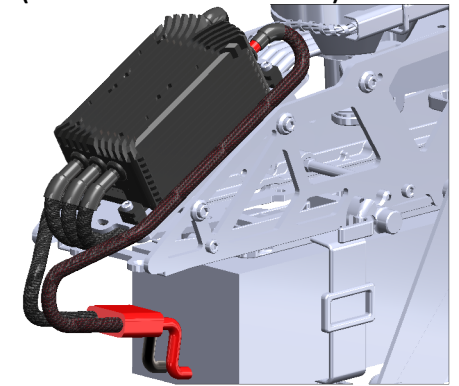


5 Check Tail & Motor belt tension. The tension has to be tight.

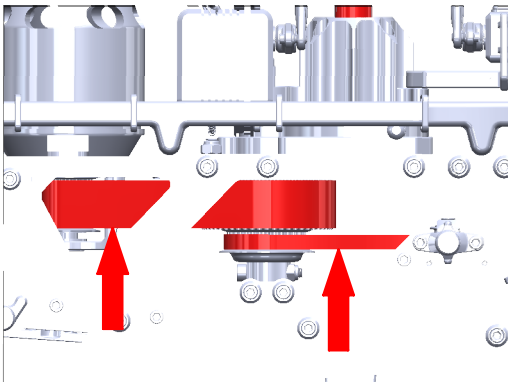


6 Check the 2 M3 screws in the Clamp. Ensure they are tight.

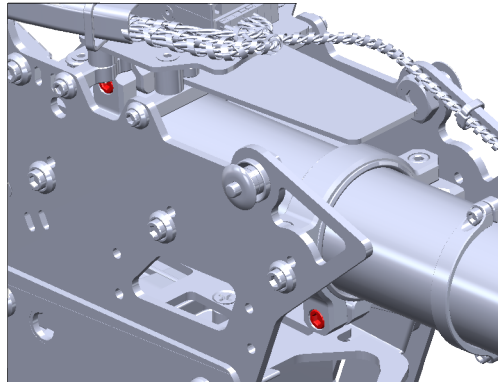


7 Check the Main Linkages & Servo Linkages

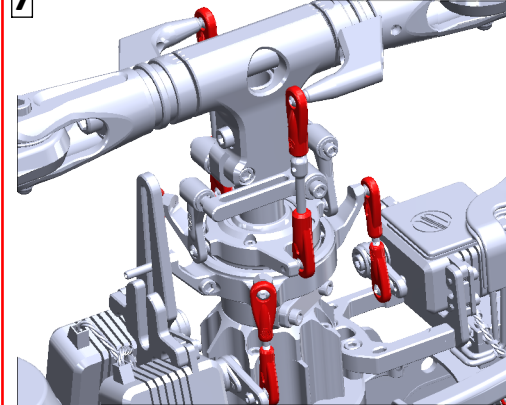


8 Check tail pulley set screws: Ensure they are tight. (It is suggested use a bit of Green Loctite.)

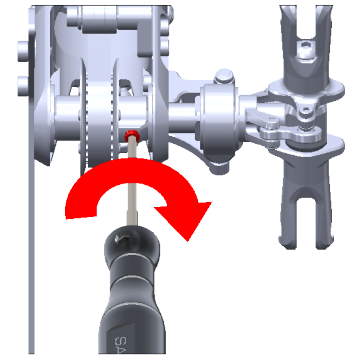


9 Check for vertical play of the main shaft.

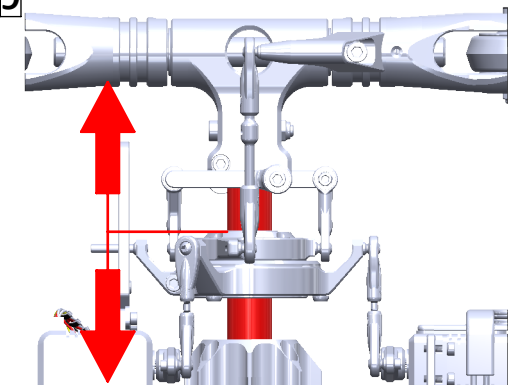

10 Check if the FBL-RX connectors are OK (hot glue is recommended).

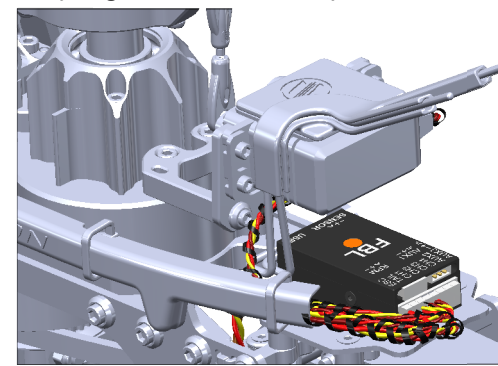


11 Check the M3 bell crank: Belt crank movement must be smooth and the screw locked. (It is suggested use a bit of Green Loctite.)

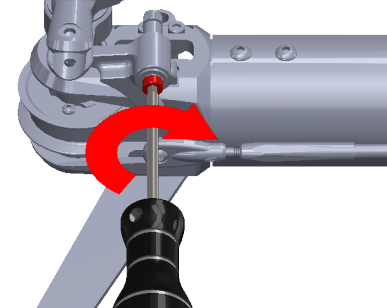



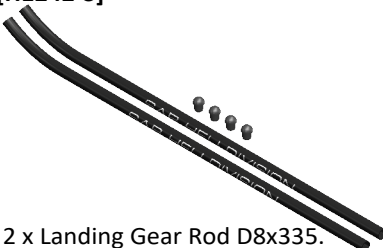







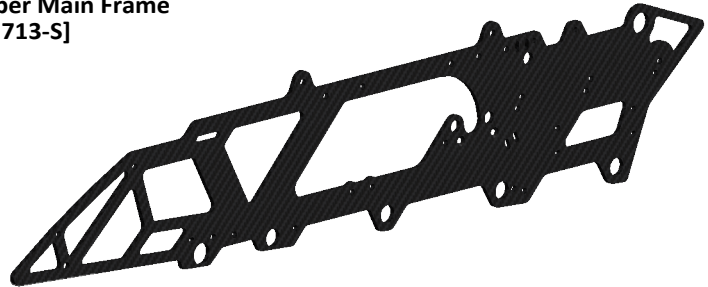
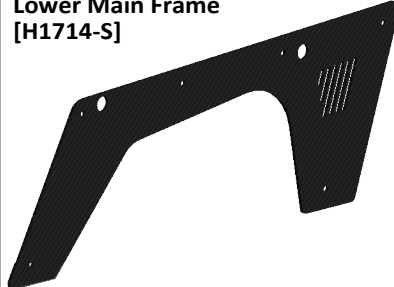
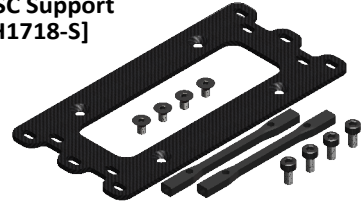

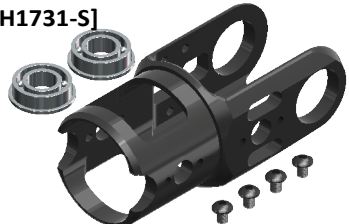


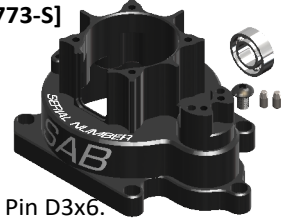
12 Be sure the follow parts are properly lubricated

- *Main shaft/swashplate
- *Tail slider/tail shaft
- *Carbon rod/carbon rod support
- *All thrust bearings
- *All plastic balls connections

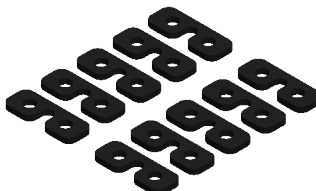


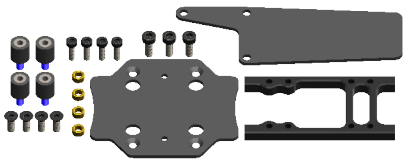


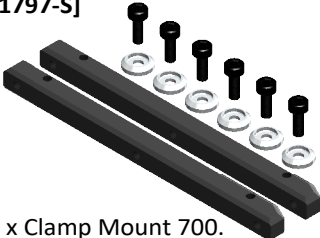

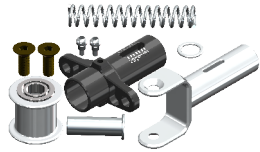





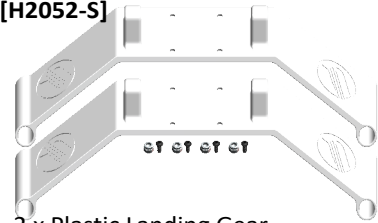

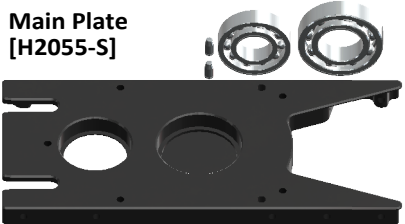
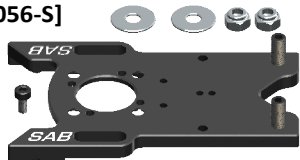




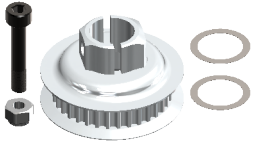


<p>Finishing Washer M3 [H0007-S]</p>  <p>- 10 x Finishing Washer M3.</p>	<p>Unibal M2 [H0064-S]</p>  <p>- 5 x Unibal M2. - 5 x Unibal Spacer. - 5 x Head Cap Screws M2x6mm. - 5 x Head Cap Screws M2x8mm.</p>	<p>Servo Spacer [H0075-S]</p>  <p>- 10 x Servo Spacer.</p>	<p>Main Spindle [H0079-S]</p>  <p>- 1 x Main Spindle. - 2 x Washer $\phi 6.1 \times \phi 14 \times 1.8 \text{mm}$. - 2 x Button Head Cap Screws M6x10.</p>	<p>Motor Pulley [H0175-18/25-S]</p>  <p>- 1 x Motor Pulley Z18/25. - 1 x Motor Bushing. - 1 x Set Screw M4x4. - 1 x Set Screw M4x6.</p>
<p>Plastic Radius Arm [H0205-S]</p>  <p>- 2 x Plastic Radius Arm.</p>	<p>Finishing Washer M2,5 [H0255-S]</p>  <p>- 10 x Finishing Washer M2,5.</p>	<p>Tail Pitch Slider Link [H0261-S]</p>  <p>- 2 x Tail Pitch Slider Link. - 2 x Bushing $\phi 2 \times \phi 3 \times 3$. - 2 x Head Cap Screws M2x6mm.</p>	<p>Tail Spindle [H0329-S]</p>  <p>- 1 x Tail Spindle. - 2 x Button Head Cap Screws M4x6.</p>	<p>Spacer Set For Tail Rotor [H0330-S]</p>  <p>- 2 x Tail Oring Damper. - 2 x Washer $\phi 5 \times \phi 8.9 \times 0,75 \text{mm}$. - 2 x Washer $\phi 7.5 \times \phi 10 \times 0,5 \text{mm}$.</p>
<p>Linkage Rod M3x50 [H0417-S]</p>  <p>- 2 x Linkage Rod M3x50. - 4 x Plastic Ball Linkage.</p>	<p>Damper Derlin [H1046-S]</p>  <p>- 2 x Damper B. - 6 x O-ring 95 Shore.</p>	<p>Reference Pin [H1048-S]</p>  <p>- 1 x Reference Pin.</p>	<p>Bell Crank Clever [H1090-S]</p>  <p>- 1 x Bell Crank Lever Assembled. - 1 x Head Cap Screw M3x22mm. - 1 x Head Cap Screw M2x6mm. - 2 x Washer $\phi 3.2 \times \phi 6 \times 0.1 \text{mm}$.</p>	<p>Tail Case Spacer [H1093-S]</p>  <p>- 1 x Tail Case Spacer. - 4 x Head Cap Screws M3x8mm.</p>
<p>Bell Crank Support [H1095-S]</p>  <p>- 1 x Bell Crank Support. - 2 x Head Cap Screws M2.5x8mm.</p>	<p>Carbon Rod Support [H1197-S]</p>  <p>- 1 x Carbon Rod Support. - 1 x Button Cap Screws M4x6mm.</p>	<p>Back Servo Mount Support [H1206-S]</p>  <p>- 1 x Back Servo Mount Support. - 2 x Head Cap Screws M3x8mm.</p>	<p>Back Servo Mount [H1207-S]</p>  <p>- 1 x Back Servo Mount. - 2 x Finishing Washer M2.5. - 2 x Servo Spacer. - 2 x Head Cap Screws M2.5x8mm.</p>	<p>Landing Gear Rod D8x335 [H1242-S]</p>  <p>- 2 x Landing Gear Rod D8x335. - 4 x Plastic Plug.</p>

<p>FBL/RX Plate Support [H1268-S]</p>  <p>- 1 x FBL/RX Plate Support SET.</p>	<p>Front Boom Lock [H1352-S]</p>  <p>- 1 x Front Boom Block. - 2 x Head Cap Screws M3x10mm. - 1 x Head Cap Screw M3x12mm. - 1 x Nylon Nut M3.</p>	<p>Anti-rotate Swashplate [H1378-S]</p>  <p>- 1 x Anti-rotate Swashplate. - 2 x Head Cap Screws M2.5x6.</p>	<p>Lock Nut M3 [H1386-S]</p>  <p>- 5 x Lock Nut M3. - 5 x Nylon Nut M3.</p>	<p>Belt Tensioner D35 [H1394-S]</p>  <p>- 1 x Belt Tensioner D35 SET.</p>
<p>Canopy Front Lock [H1439-S]</p>  <p>- 1 x Canopy Front Lock. - 4 x Self Tapping Screws M3x10.</p>	<p>Upper Main Frame [H1713-S]</p>  <p>- 1 x Upper Main Frame.</p>	<p>Lower Main Frame [H1714-S]</p>  <p>- 1 x Lower Main Frame.</p>	<p>ESC Support [H1718-S]</p>  <p>- 1 x ESC Plate. - 2 x ESC Frame Spacer. - 4 x Head Cap Screws M3x6. - 4 x Flat Cap Screws M3x5.</p>	
<p>Battery Lock [H1721-S]</p>  <p>- 1 x Battery Lock Base. - 1 x Battery Lock Level. - 1 x Battery Lock Pin. - 1 x Battery Lock Spring. - 1 x Bushing $\varnothing 2,5 \times \varnothing 4 \times 6,3$. - 1 x Flat Cap Screw M2.5x12. - 2 x Head Cap Screws M3x6.</p>	<p>Main Shaft D15 [H1728-S]</p>  <p>- 1 x Main Shaft D15. - 2 x Shoulder Cap Screws M4x24. - 2 x Shim $\varnothing 15,1 \times \varnothing 18 \times 0,1$.</p>	<p>Main Blade Washer [H1730-S]</p>  <p>- 4 x Main Blade Washer.</p>	<p>D35 Tube Tail Case [H1731-S]</p>  <p>- 1 x D35 Tube Tail Case. - 4 x Button Cap Screws M3x4. - 2 x Flanged Bearing $\varnothing 8 \times \varnothing 16 \times 5$.</p>	<p>Tail Shaft D8 [H1732-S]</p>  <p>- 1 x Tail Shaft D8. - 2 x O-ring CS2.62xID4.42,Shore 70.</p>
<p>Main Gear Z68 [H1748-S]</p>  <p>- 1 x Main Gear Z68. - 1 x Main Gear Mount. - 5 x Head Cap Screws M3x6. - 2 x Shoulder Cap Screws M4x24.</p>	<p>Bottom Gear Box Case [H1773-S]</p>  <p>- 2 x Pin D3x6. - 1 x Bottom Gear Box Case. - 1 x Button Cap Screws M4x6. - 1 x Ball Bearing $\varnothing 8 \times \varnothing 16 \times 5$.</p>	<p>Top Gear Box Case [H1774-S]</p>  <p>- 1 x Top Gear Box Case. - 4 x Head Cap Screws M3x8. - 1 x Ball Bearing $\varnothing 15 \times \varnothing 28 \times 7$.</p>	<p>Front Servo Mount [H1775-S]</p>  <p>- 1 x Front Servo Mount. - 1 x Servo Align Tool. - 2 x Head Cap Screws M3x8.</p>	<p>Pinion Z18xD12 [H2229-S]</p>  <p>- 1 x Pinion Z18xD12.</p>

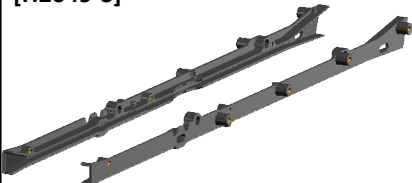


<p>Front Tail Pulley Z34 [H1778-S]</p>  <ul style="list-style-type: none"> - 1 x Front Tail Pulley Z34. - 1 x Nylon Nut M4. - 2 x Shim $\varnothing 12.1 \times \varnothing 16 \times 0.1$. - 1 x Shouldered Cap Screw M4x21.5. 	<p>Serial Number [H1780-S]</p>  <ul style="list-style-type: none"> - 1 x Serial Number. - 1 x Flat Cap Screw M3x5. 	<p>Bearing Transmission KIT [H1788-S]</p>  <ul style="list-style-type: none"> - 2 x Bushing $\varnothing 15.1 \times \varnothing 19 \times 7.5$. - 1 x Ball Bearing $\varnothing 8 \times \varnothing 16 \times 5$. - 1 x Ball Bearing $\varnothing 12 \times \varnothing 24 \times 6$. - 2 x Ball Bearing $\varnothing 15 \times \varnothing 28 \times 7$. - 2 x Shim $\varnothing 15.1 \times \varnothing 18 \times 0.1$. 	<p>Blade Grip Arm 30 [H1789-S]</p>  <ul style="list-style-type: none"> - 2 x Blade Grip Arm 30. - 2 x Uniball M3. - 2 x Head Cap Screws M4x10mm. 	<p>Main Blade Grip [H1790-S]</p>  <ul style="list-style-type: none"> - 1 x Main Blade Grip. - 1 x Washer $\varnothing 10 \times \varnothing 16 \times 1$. - 1 x Washer $\varnothing 6, 1 \times \varnothing 14 \times 1, 8$. - 1 x Head Cap Screw M6x10mm. - 1 x Thrust Bearing $\varnothing 10 \times \varnothing 18 \times 5, 5$. - 2 x Ball Bearing $\varnothing 10 \times \varnothing 19 \times 5$.
<p>Tail Servo Mount D35 [H1795-S]</p>  <ul style="list-style-type: none"> - 2 x Tail Servo Mount D35-01. - 2 x Tail Servo Mount D35-02. - 4 x Head Cap Screws M2.5x10. 	<p>Clamp Mount 700 [H1797-S]</p>  <ul style="list-style-type: none"> - 2 x Clamp Mount 700. - 2 x Finishing Washer M3. - 4 x Head Cap Screws M3x10. 	<p>Plastic Wire Cover [H1798-S]</p>  <ul style="list-style-type: none"> - 1 x Plastic Wire Cover. - 2 x Head Cap Screws M3x8mm. 	<p>Push Tensioner [H1799-S]</p>  <ul style="list-style-type: none"> - 1 x Push Tensioner SET. 	<p>Fixed Tensioner [H1801-S]</p>  <ul style="list-style-type: none"> - 1 x Fixed Tensioner SET.
<p>Tail Belt Idler D9x12.5 [H1879-S]</p>  <ul style="list-style-type: none"> - 1 x Tail Belt Idler D9x12.5. - 2 x Flanged Bearing $\varnothing 5 \times \varnothing 9 \times 3$. 	<p>Tail Blade Grip [H1893-S]</p>  <ul style="list-style-type: none"> - 2 x Tail Blade Grip. - 2 x Washer $\varnothing 7, 5 \times \varnothing 10 \times 0, 5$. - 2 x Button Cap Screws M4x6mm. - 4 x Ball Bearing $\varnothing 5 \times \varnothing 10 \times 4$. - 2 x Thrust Bearing $\varnothing 5 \times \varnothing 10 \times 4$. 	<p>Battery Guide 700 [H2049-S]</p>  <ul style="list-style-type: none"> - 1 x Battery Guide SX 700. - 1 x Battery Guide DX 700. 	<p>Plastic Battery Tray [H2051-S]</p>  <ul style="list-style-type: none"> - 1 x Plastic Battery Mount. - 1 x Carbon Fiber Battery Tray. - 10 x Countersunk Screw M3x8. - 2 x Double-sided Tape 1mm. - 4 x Strap 20x250mm. 	<p>Plastic Landing Gear [H2052-S]</p>  <ul style="list-style-type: none"> - 2 x Plastic Landing Gear. - 2 x Nylon Nut M3. - 4 x Tapping Head Screws M2.5x6.
<p>HEX 5 Spacer M3x60 [H2054-S]</p>  <ul style="list-style-type: none"> - 2 x HEX 5 Spacer M3x60. 	<p>Main Plate [H2055-S]</p>  <ul style="list-style-type: none"> - 1 x Main Plate. - 2 x Pin 3x6. - 1 x Ball Bearing $\varnothing 12 \times \varnothing 24 \times 6$. - 1 x Ball Bearing $\varnothing 15 \times \varnothing 28 \times 7$. 	<p>Motor Mount [H2056-S]</p>  <ul style="list-style-type: none"> - 1 x Motor Mount 700. - 1 x Head Cap Screw M3x6mm. - 2 x Washer $\varnothing 5, 3 \times \varnothing 15 \times 1$. - 2 x Nylon Nut M5. - 2 x Set Screw M5x16mm. 	<p>Rear Boom Lock [H2058-S]</p>  <ul style="list-style-type: none"> - 1 x Rear Boom Lock. - 1 x Nylon Nut M3. - 1 x Rear Boom Lock Rubber. - 2 x Head Cap Screws M3x10. - 1 x Head Cap Screw M3x12. 	<p>Carbon Fiber Tail Fin [H2066-S]</p>  <ul style="list-style-type: none"> - 1 x Carbon Fiber Tail Fin. - 2 x Head Cap Screws M3x8. - 1 x Yellow Sticker. - 1 x Orange Sticker.

**Double Clutch System
[H1777-S]**

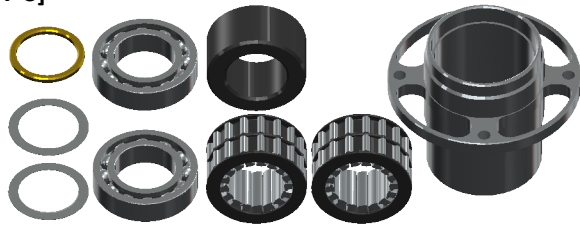

- 1 x Double Clutch System SET.

**Main Pulley
[H2057-S]**



- 1 x Main Pulley Z56.
- 4 x Head Cap Screws M3x4.

**Main Hub D15
[H2074-S]**



- 1 x Main Hub D15.
- 1 x Head Cap Screw M3x12mm.
- 1 x Nylon Nut M4.
- 1 x Shoulder Cap Screw M4x24.

**Radius Arm 34,25
[H2075-S]**



- 2 x Radius Arm 34.25 SET.

**Swashplate D15
[H2076-S]**



- 1 x Swashplate SET Assembly.
- 7 x Uniball M3.
- 1 x Reference Pin.

**3rd Bearing Support
[H2079-S]**




- 1 x 3rd Bearing Support.
- 4 x Finishing Washer M3.
- 4 x Head Cap Screws M3x8mm.
- 1 x Ball Bearing $\varnothing 12x \varnothing 21x5$.

**D8 Tail Pitch Slider
[H2081-S]**



- 1 x D8 Tail Pitch Slider 01.
- 1 x D8 Tail Pitch Slider 02.
- 1 x D8 Tail Pitch Slider 03.
- 2 x Ball Bearing 10x15x4.

**Tail Pulley Z26
[H2083-26-S]**



- 1 x Tail Pulley Z26.
- 2 x Tail Pulley Z26 WS.
- 6 x Button Cap Screws M2x5mm.
- 1 x Set Screw M4x6mm.

**Tail Tensioner Base
[H2084-S]**




- 1 x Tail Tensioner Base.
- 2 x Head Cap Screws M2.5x6.
- 1 x Head Cap Screw M3x8.
- 1 x Washer $\varnothing 3x \varnothing 7x1$.
- 3 x Ball Bearing $\varnothing 5x \varnothing 9x3$.

**Canopy Quick Release
[H2106-S]**




- 2 x Canopy Quick Release.

**Washer $\varnothing 10.1x \varnothing 16x1$ with LIP
[H2146-S]**




- 4 x Washer $\varnothing 10.1x \varnothing 16x1$.

**SLS Antena 700
[H2155-S]**



- 1 x SLS Antena 700.
- 1 x Double-sided Tape.

**Canopy Ilgoblin Raw 700
[H2190-S]**

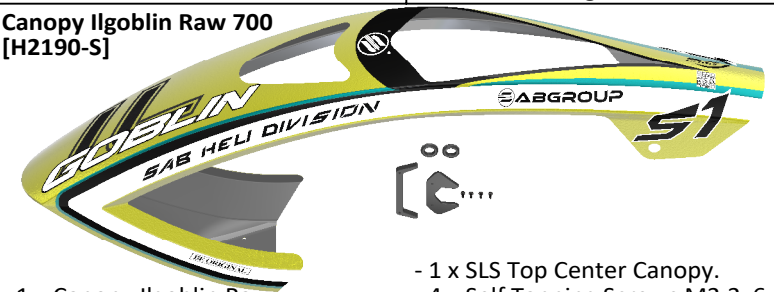

- 1 x Canopy Ilgoblin Raw.
- 1 x SLS Bottom Center Canopy.
- 1 x SLS Top Center Canopy.
- 4 x Self Tapping Screws M2.2x6.
- 2 x Canopy Grommet.

**Frame Bushing
[H2156-S]**



- 8 x Frame Bushing.

**Boom Ilgoblin Raw
[H2192-S]**



- 1 x Boom Ilgoblin Raw.

**Plastic Ball Linkage M2.5
[H2209-S]**




























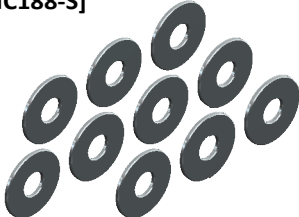
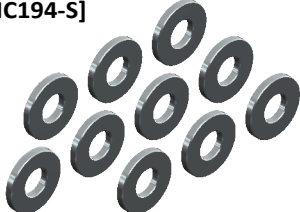



- 10 x Plastic Ball Linkage M2.5.












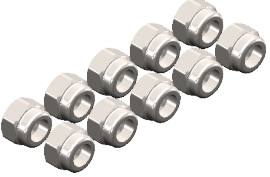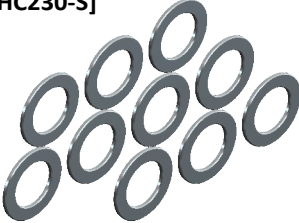



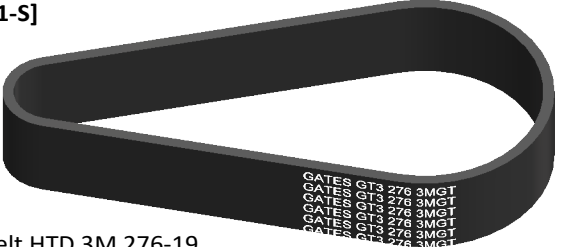








**Plastic Ball Linkage M3
[H2210-S]**



- 10 x Plastic Ball Linkage M3.

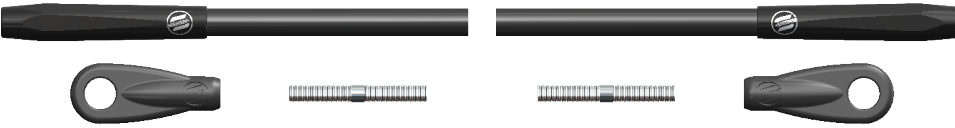

<p>[HC002-S]</p>  <p>- 10 x Socket Head Cap Screws M2x5mm.</p>	<p>[HC004-S]</p>  <p>- 10 x Socket Head Cap Screws M2x6mm.</p>	<p>[HC018-S]</p>  <p>- 10 x Socket Head Cap Screws M2.5x6mm.</p>	<p>[HC020-S]</p>  <p>- 10 x Socket Head Cap Screws M2.5x8mm.</p>	<p>[HC022-S]</p>  <p>- 10 x Socket Head Cap Screws M2.5x10mm.</p>	<p>[HC032-S]</p>  <p>- 10 x Socket Head Cap Screws M2.5x18mm.</p>
<p>[HC044-S]</p>  <p>- 10 x Socket Head Cap Screws M3x6mm.</p>	<p>[HC050-S]</p>  <p>- 10 x Socket Head Cap Screws M3x8mm.</p>	<p>[HC056-S]</p>  <p>- 10 x Socket Head Cap Screws M3x10mm.</p>	<p>[HC062-S]</p>  <p>- 10 x Socket Head Cap Screws M3x12mm.</p>	<p>[HC068-S]</p>  <p>- 10 x Socket Head Cap Screws M3x16mm.</p>	<p>[HC079-S]</p>  <p>- 2 x Socket Head Cap Shoulder Screws M3x18mm. - 2 x Nylon Nut M3.</p>
<p>[HC096-S]</p>  <p>- 10 x Button Head Cap Screws M4x6mm.</p>	<p>[HC102-S]</p>  <p>- 10 x Socket Head Cap Screws M4x10mm.</p>	<p>[HC111-S]</p>  <p>- 10 x Head Cap Shoulder Screws M4x24.</p>	<p>[HC114-S]</p>  <p>- 2 x Shoulder Screws M5x30. - 2 x Nylon Nut M5.</p>	<p>[HC124-S]</p>  <p>- 10 x Socket Head Cap Screws M6x10mm.</p>	<p>[HC128-S]</p>  <p>- 10 x Flat Head Cap Screws M2.5x5mm.</p>
<p>[HC132-S]</p>  <p>- 10 x Flat Head Cap Screws M3x5mm.</p>	<p>[HC134-S]</p>  <p>- 10 x Flat Head Cap Screws M3x8mm.</p>	<p>[HC135-S]</p>  <p>- 10 x Flat Head Cap Screws M3x10mm.</p>	<p>[HC136-S]</p>  <p>- 10 x Self Tapping Head Cap Screws M3x10mm.</p>	<p>[HC140-S]</p>  <p>- 10 x Thread Rod M2.5x20.</p>	<p>[HC153-S]</p>  <p>- 10 x Set Screw M4x6.</p>
<p>[HC181-S]</p>  <p>- 10 x Washer $\phi 3x \phi 7x1$.</p>	<p>[HC188-S]</p>  <p>- 10 x Washer $\phi 5.3x \phi 15x1$.</p>	<p>[HC194-S]</p>  <p>- 10 x Washer $\phi 6.1x \phi 14x1.8$.</p>	<p>[HC200-S]</p>  <p>- 10 x Nylon Nut M2.5.</p>	<p>[HC206-S]</p>  <p>- 10 x Nylon Nut M3.</p>	<p>[HC212-S]</p>  <p>- 10 x Nylon Nut M4.</p>

<p>[HC218-S]</p>  <p>- 10 x Nylon Nut M5.</p>	<p>[HC230-S]</p>  <p>- 10 x Washer ϕ10xϕ16x1.</p>	<p>[HC304-S]</p>  <p>- 1 x Belt HTD 3M 2061-6.</p>	<p>[HC335-S]</p>  <p>- 4 x Oring 2.62x4.42, Shore 70.</p>		
<p>[HC351-S]</p>  <p>- 10 x Flat Head Cap Screws M4x6.</p>	<p>[HC400-S]</p>  <p>- 4 x Flanged Bearing ϕ2,5xϕ6x2,6.</p>	<p>[HC402-S]</p>  <p>- 4 x Flanged Bearing ϕ3xϕ7x3.</p>	<p>[HC406-S]</p>  <p>- 4 x Ball Bearing ϕ5xϕ9x3.</p>	<p>[HC411-S]</p>  <p>- 4 x Ball Bearing ϕ5xϕ10x4.</p>	<p>[HC422-S]</p>  <p>- 2 x Ball Bearing ϕ10xϕ19x5.</p>
<p>[HC435-S]</p>  <p>- 2 x Thrust Bearing ϕ5xϕ10x4.</p>	<p>[HC438-S]</p>  <p>- 2 x Thrust Bearing ϕ10xϕ18x5.5.</p>	<p>[HC529-S]</p>  <p>- 4 x Oring 95 Shore.</p>	<p>[HC545-S]</p>  <p>- 10 x Head Cap Shoulder Screws M4x21.5.</p>	<p>[HC573-S]</p>  <p>- 4 x Rubber Pin M3 65 Shore.</p>	<p>[HC576-S]</p>  <p>- 10 x Flat Head Cap Screws M2.5x12.</p>
<p>[HC601-S]</p>  <p>- 1 x Belt HTD 3M 276-19.</p>	<p>[HC602-S]</p>  <p>- 1 x Clutch OWB ϕ12xϕ20x11mm.</p>	<p>[HC608-S]</p>  <p>- 10 x Socket Head Cap Screws M3x25.</p>	<p>[HC609-S]</p>  <p>- 10 x Button Head Cap Screws M2x6.</p>	<p>[HC688-S]</p>  <p>- 5 x Shims ϕ10xϕ16x0.2. - 5 x Shims ϕ2.1xϕ16x0.1. - 5 x Shims ϕ8.1xϕ10x0.1. - 5 x Shims ϕ15.1xϕ21x0.05. - 5 x Shims ϕ23xϕ25.9x0.05.</p>	
<p>[HC701-S]</p>  <p>- 2 x Flanged Bearing ϕ8xϕ16x5.</p>	<p>[HC704-S]</p>  <p>- 1 x Carbon Rod KIT.</p>	<p>[HC712-S]</p>  <p>- 10 x Countersunk Head Screws M3x8mm.</p>	<p>[HC714-S]</p>  <p>- 10 x Washer ϕ3.1xϕ5.75x0.5.</p>		



The manual can be downloaded here

**IL GOBLIN
RAW**
DOWNLOADED HERE 



IL GOBLIN RAW SG763

Release 1.0 - October 2024

WORLD DISTRIBUTION

www.goblin-helicopter.com

For sales inquiries, please email:

sales@goblin-helicopter.com

For info inquiries, please email:

support@goblin-helicopter.com

Attention: If you are a customer and have questions or need of assistance, please contact in a first time the Goblin retailer where you made the purchase.

EUROPEAN DISTRIBUTION

www.sabgroup.it

For sales inquiries, please email:

sale@sabgroup.it

For info inquiries, please email:

support@sabgroup.it

Attention: If you are a customer and have questions or need of assistance, please contact in a first time the Goblin retailer where you made the purchase.

WWW.GOBLIN-HELICOPTER.COM



SABGROUP



SAB HELI DIVISION